
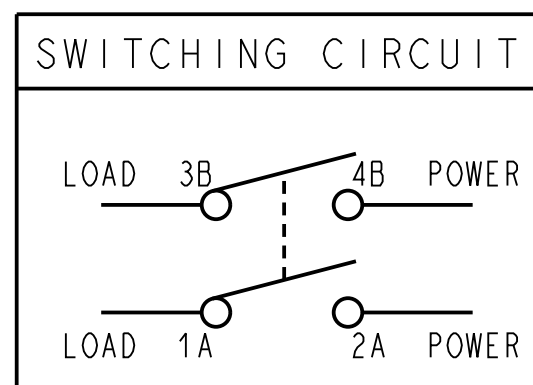


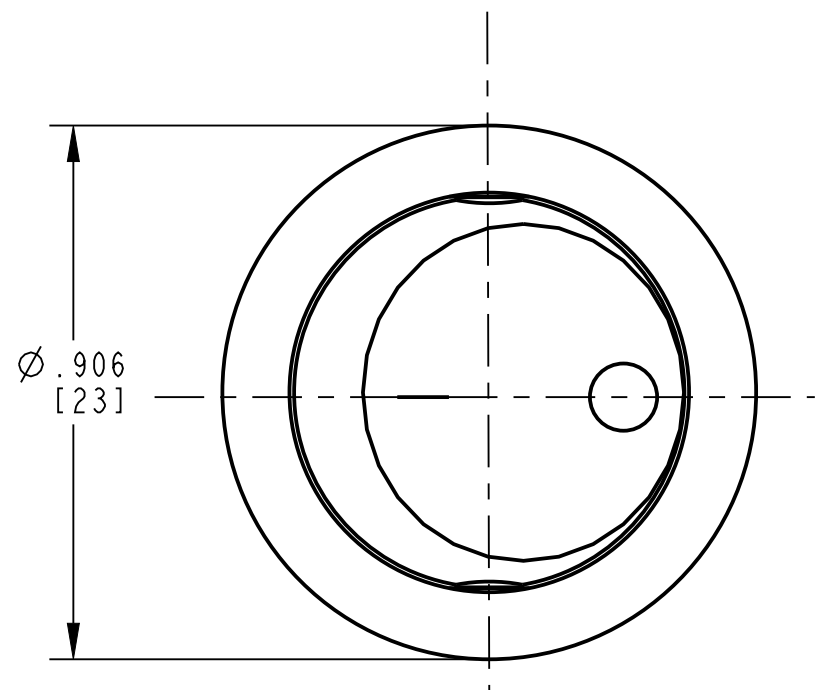

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKER:

10A 125VAC
8A 250VAC
1/4HP 125/250VAC

G **10(4)A 250V~T125/55 10E3**




12(4)A 125/250V~

INITIAL CONTACT RESISTANCE: 20m Ω (MAX.)

INSULATION RESISTANCE: 100M Ω MIN. AT 500VDC

DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE

TERMINALS (4): .187 (4.7) X .031(0.8).

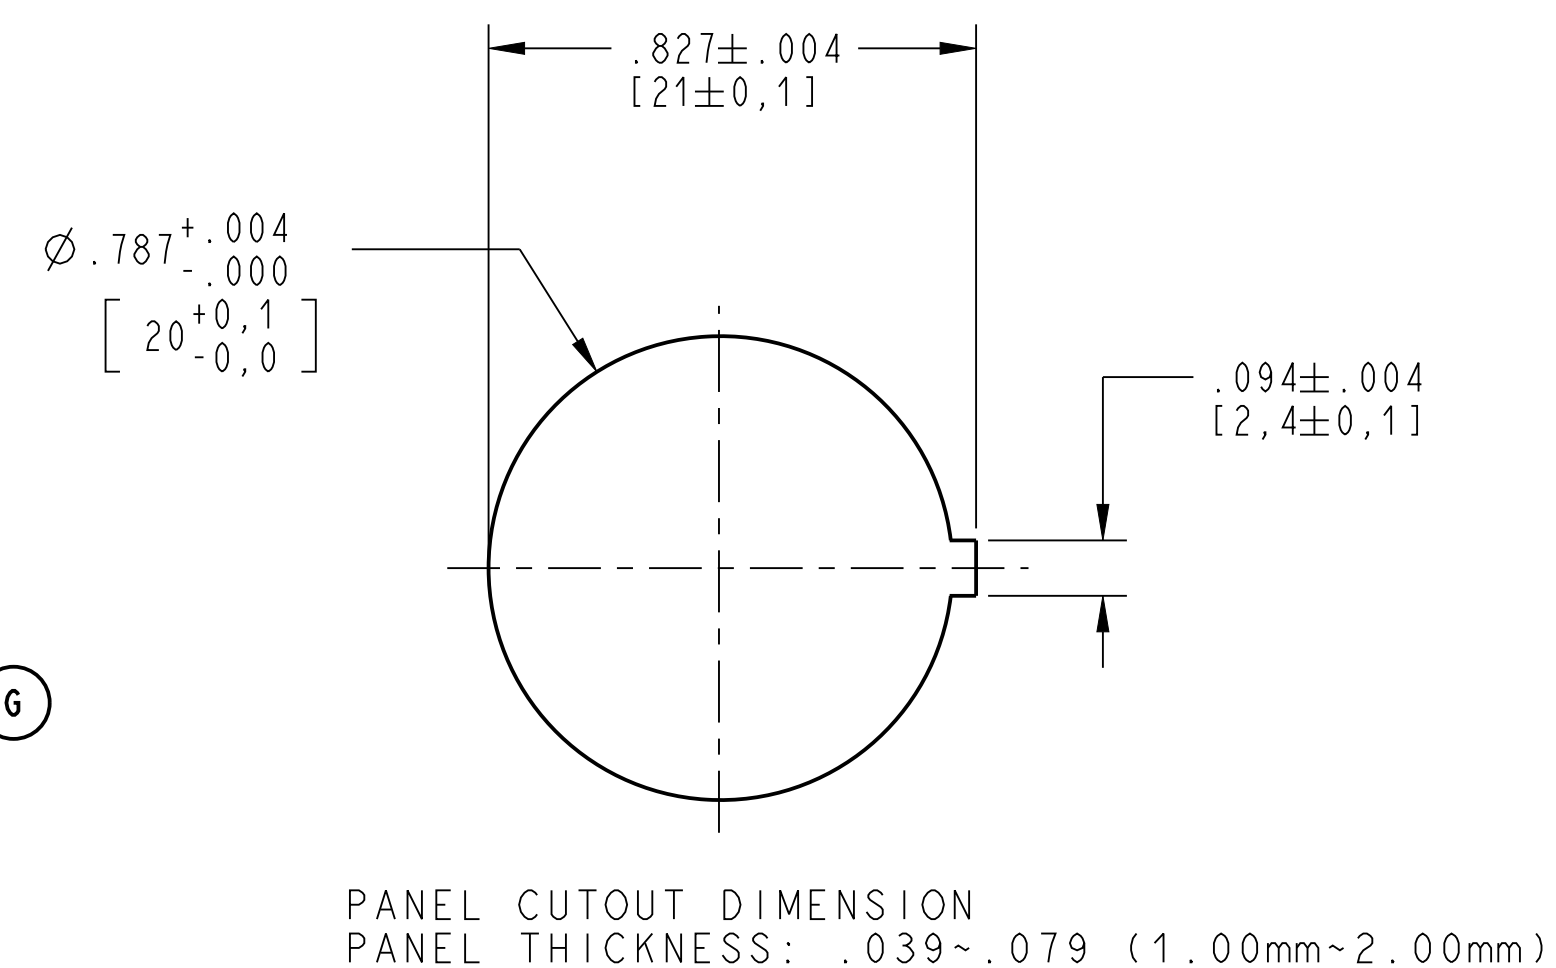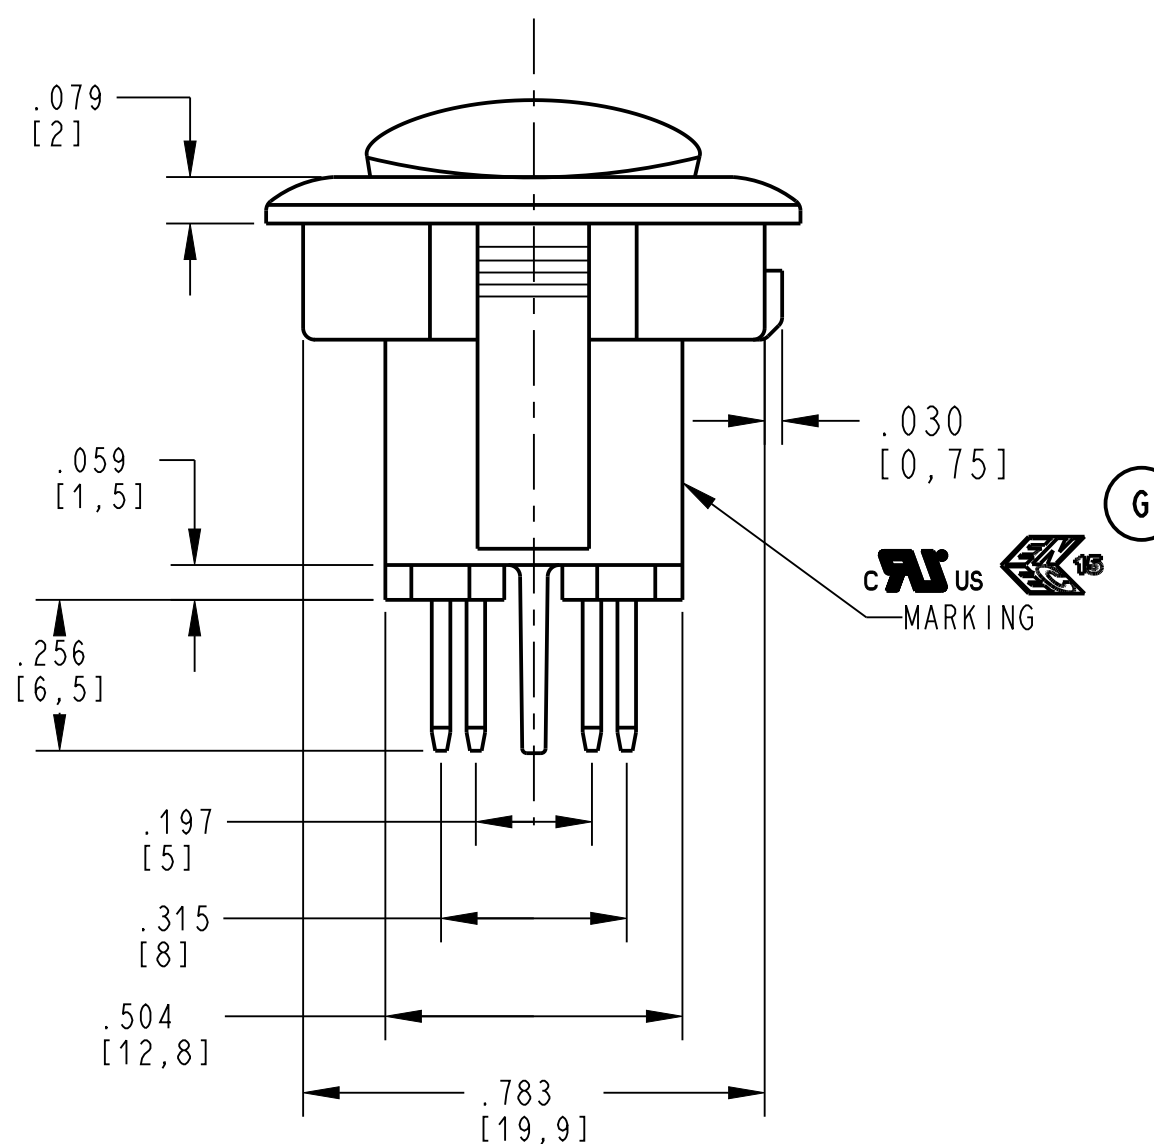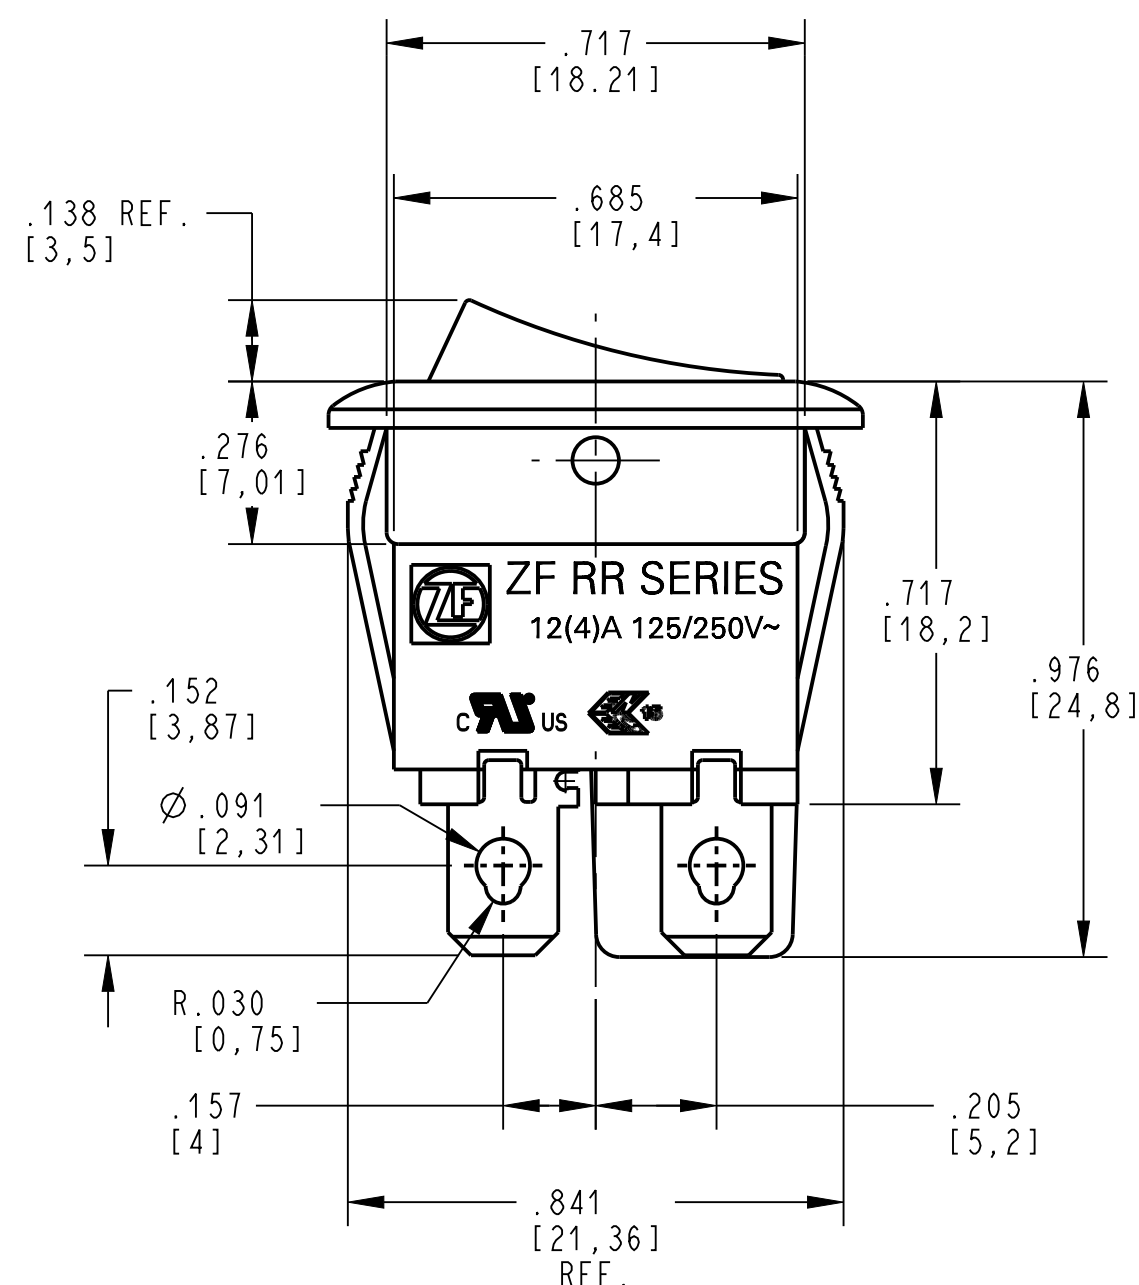

PANEL CUTOUT DIMENSION
PANEL THICKNESS: .039 ~ .079 (1.00mm ~ 2.00mm)

DWN: TLM					
APVD: SB					
DATE: 03-JUL-11					
THIRD ANGLE PROJECTION					
		TOLERANCE UNLESS SPECIFIED			
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES
4000000138		INCH	± 0.02	± 0.012	± 5 °
REV		ECO NO.	DATE	PREP	APVD
G		Z000689143	5-9-2023	TCH	ELL
C		ITEM NO.	RR A32H3FBBNN		
SCALE:		3:1	SH 1 OF 1		