


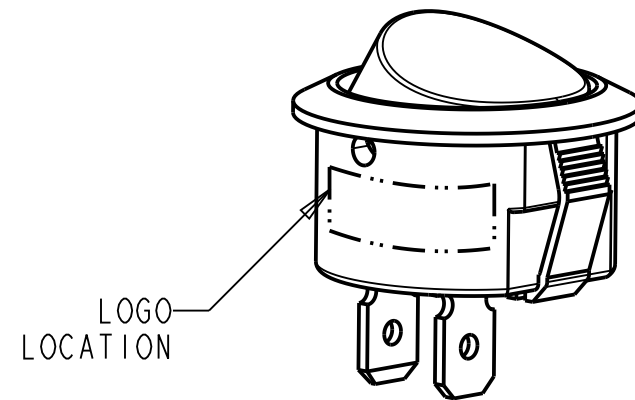
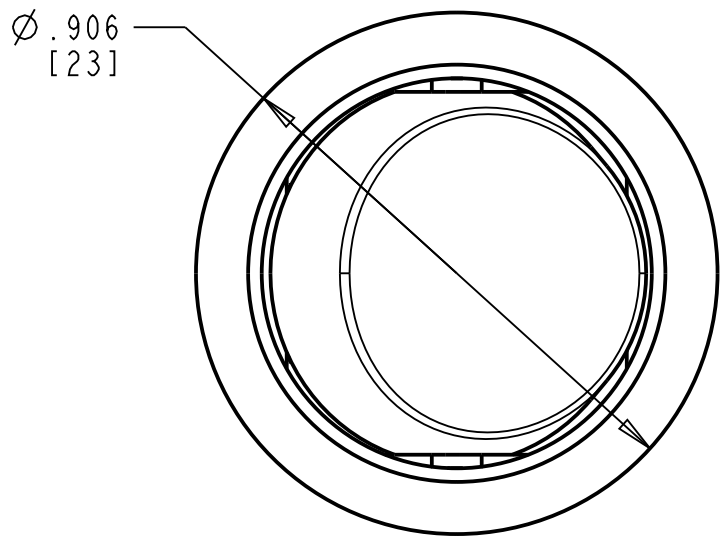
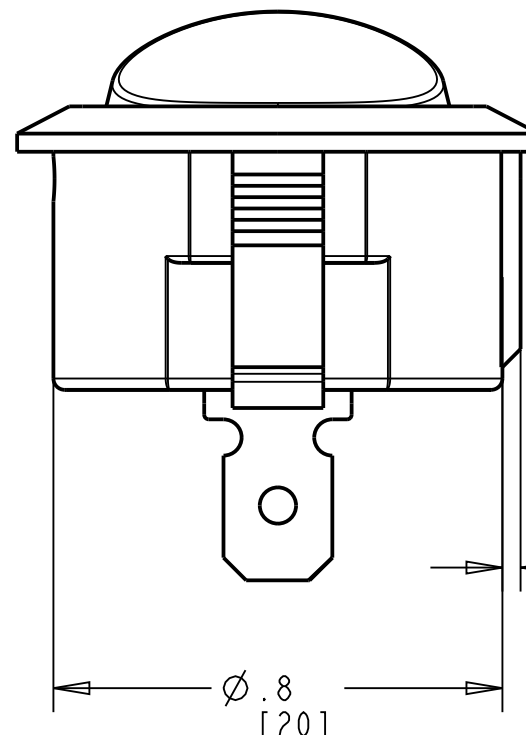


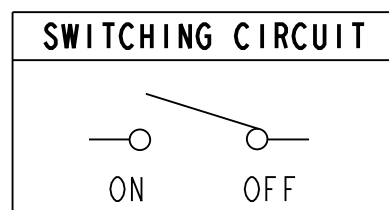

SCALE 2.000

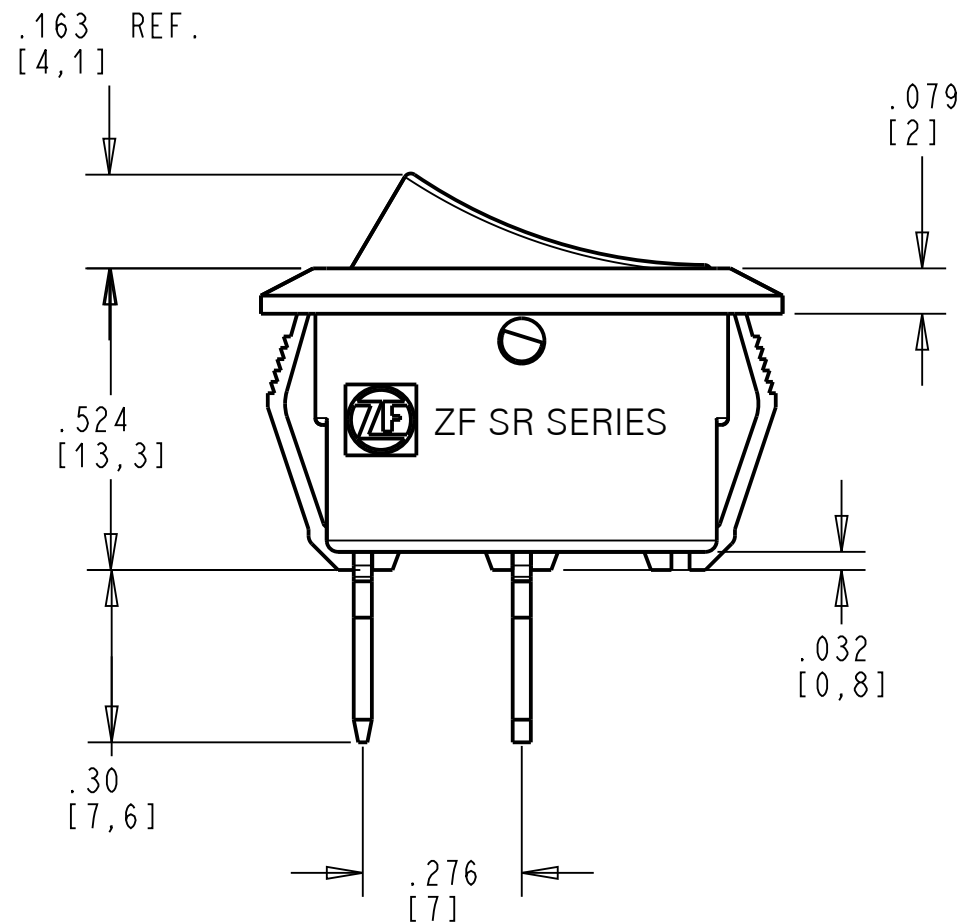

Ø.787^{+.004}_{-.000}
[20^{+0,1}_{-0,0}]

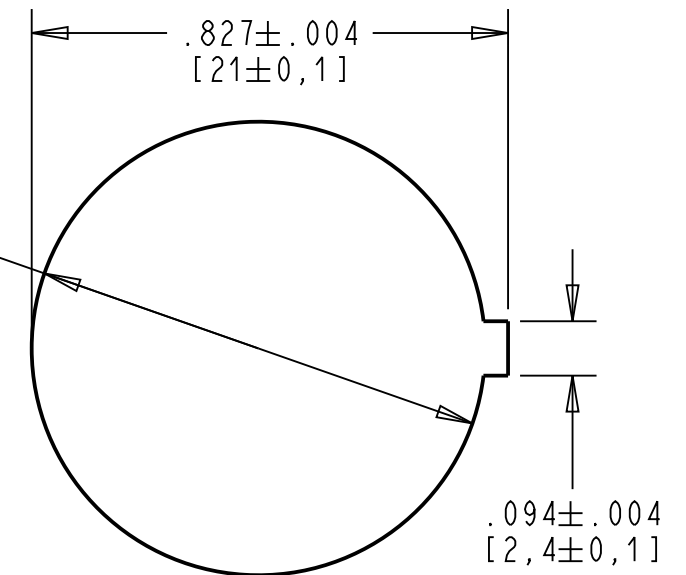

PANEL CUTOUT DIMENSION
FOR PANEL THICKNESS OF
INCHES (mm)
.039 TO .078 (1.0 to 2.0)

NOTES (UNLESS OTHERWISE SPECIFIED):

ELECTRICAL RATING:

UL 20A 125 VAC, 12A 250 VAC

UL 16(8)A 125/250V~

OPERATING FORCE: 500 GRAMS± 200 GRAMS.

DIELECTRIC VOLTAGE - WITHSTAND: 1,000 VAC FOR 1 MINUTE.

INSULATION RESISTANCE: DC 500V 100MΩ (MIN.).


CONTACT RESISTANCE: 20mΩ INITIAL (MAX.).

HOUSING AND ROCKER COLOR: BLACK
NO LEGEND

TERMINALS (2): .187 (4.8) WIDE X .031 (0.8) THICK
HOLE DIAMETER .063 (1.6)

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER
THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

DWN: TLM
APVD: ELL
DATE: 26-Jun-07
THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

G	Z000389791	22-Dec-16	GP	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.
NAME / DESCRIPTION

SPEC. DRAWING

B ITEM NO. SRJ22A3BBBNN
SCALE: 3:1 SH 1 OF 1