


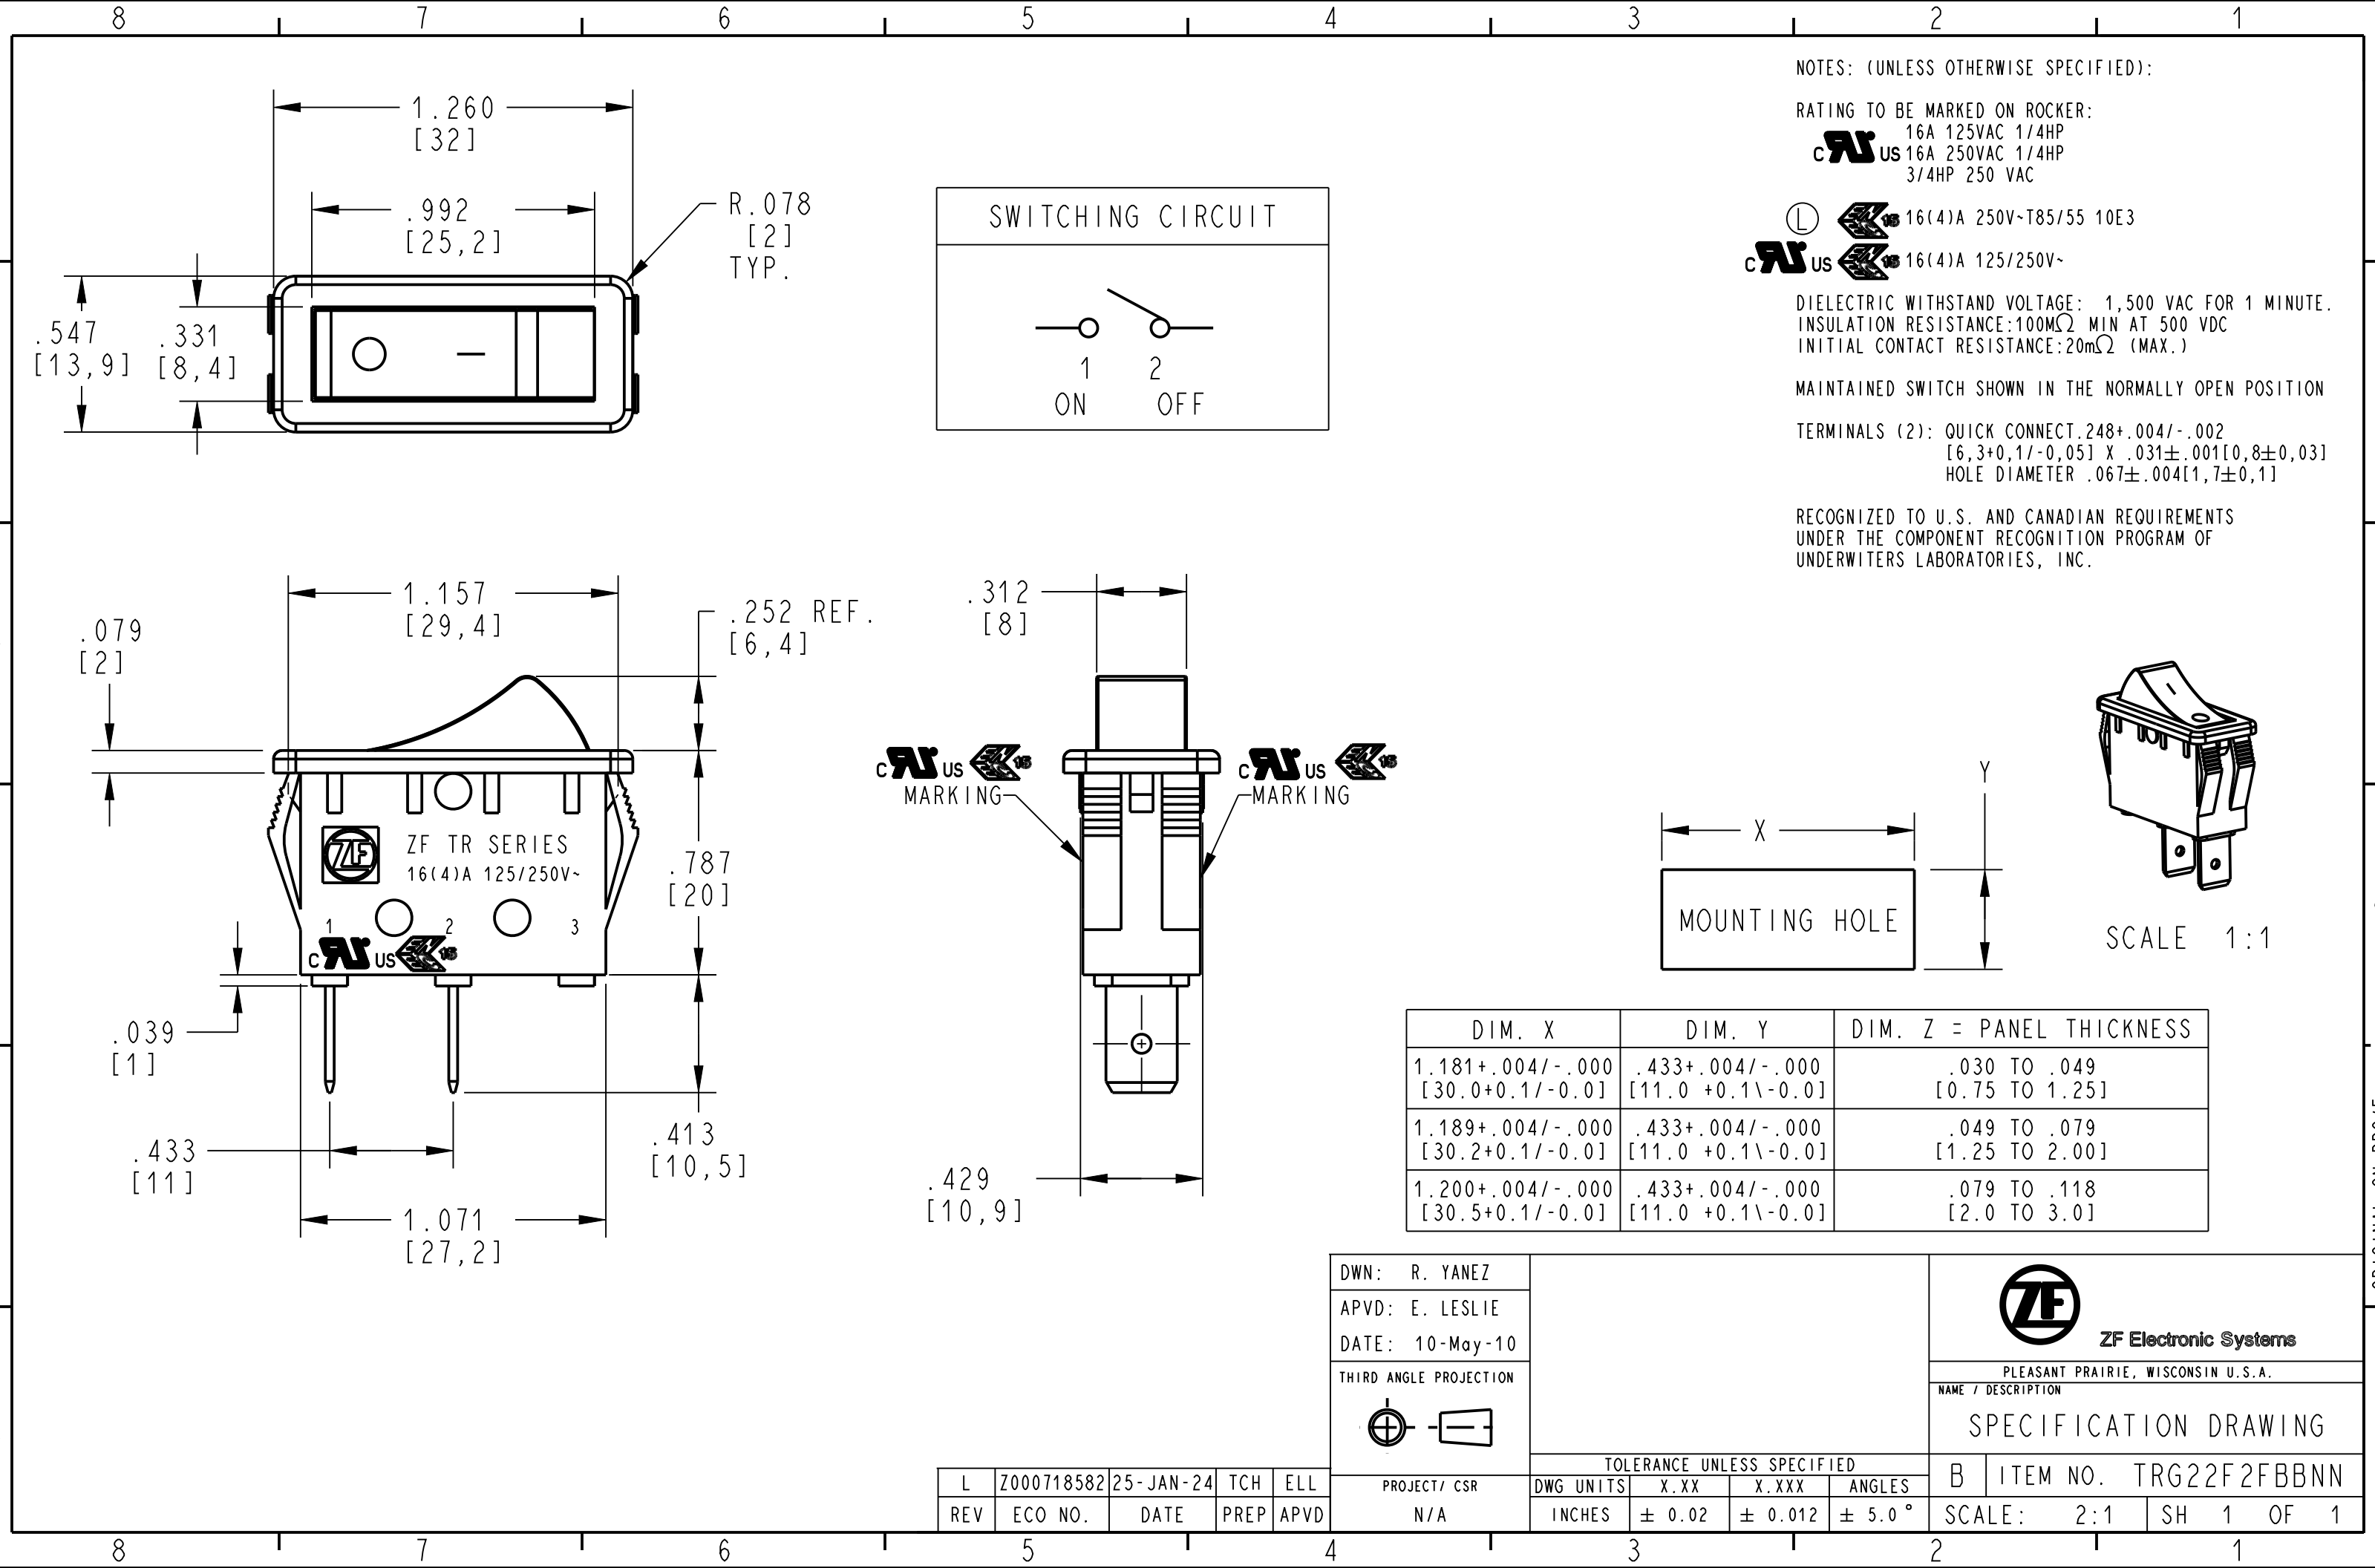

NOTES: (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKER:

16A 125VAC 1/4HP
16A 250VAC 1/4HP
3/4HP 250 VAC


16(4)A 250V~T85/55 10E3
16(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1,500 VAC FOR 1 MINUTE.
INSULATION RESISTANCE:100MΩ MIN AT 500 VDC
INITIAL CONTACT RESISTANCE:20mΩ (MAX.)

MAINTAINED SWITCH SHOWN IN THE NORMALLY OPEN POSITION

TERMINALS (2): QUICK CONNECT.248+.004/- .002
[6,3+0,1/-0,05] X .031±.001[0,8±0,03]
HOLE DIAMETER .067±.004[1,7±0,1]

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.




SCALE 1:1

DIM. X	DIM. Y	DIM. Z = PANEL THICKNESS
1.181+.004/- .000 [30.0+0.1/-0.0]	.433+.004/- .000 [11.0 +0.1\ -0.0]	.030 TO .049 [0.75 TO 1.25]
1.189+.004/- .000 [30.2+0.1/-0.0]	.433+.004/- .000 [11.0 +0.1\ -0.0]	.049 TO .079 [1.25 TO 2.00]
1.200+.004/- .000 [30.5+0.1/-0.0]	.433+.004/- .000 [11.0 +0.1\ -0.0]	.079 TO .118 [2.0 TO 3.0]

DWN: R. YANEZ
APVD: E. LESLIE
DATE: 10-May-10

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

L	Z000718582	25-JAN-24	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. TRG22F2FBBNN

SCALE: 2:1 SH 1 OF 1