
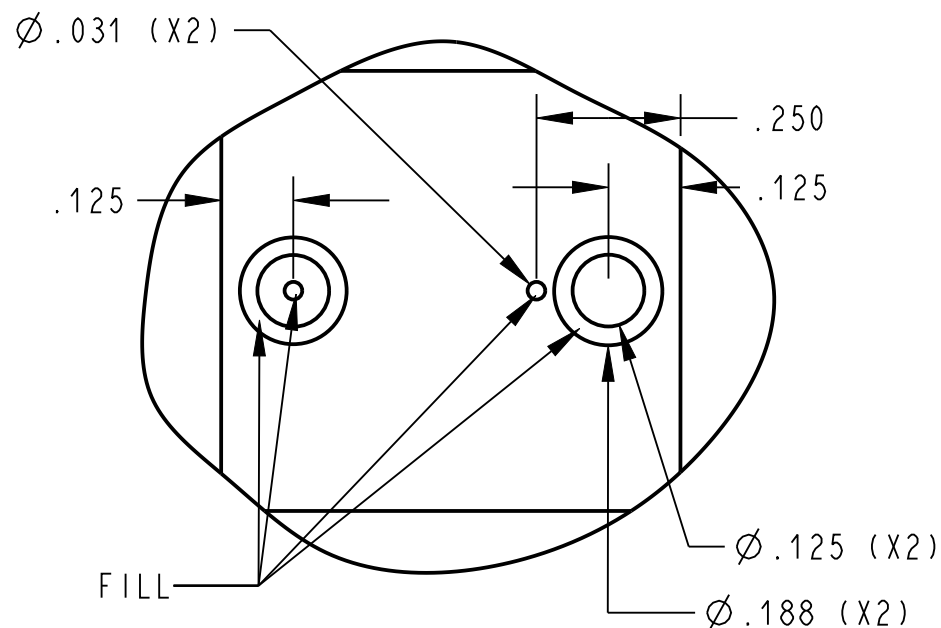
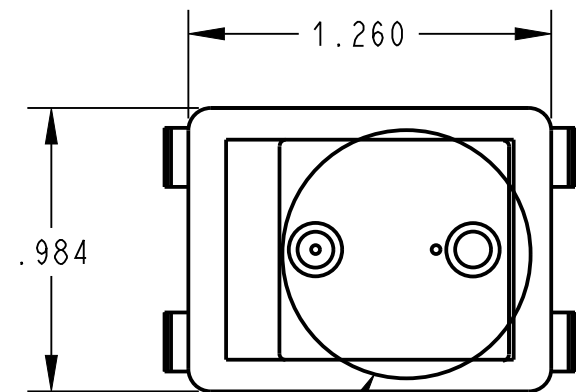




IMPRINT DETAIL

NOTES: (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKERS:

16A, 125/250 VAC 1/4HP
16A, 250VAC 1/4HP
3/4HP 250 VAC.

16(4)A, 250VAC T125/55 10E3

16(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1000VAC FOR 1 MINUTE.



INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC

INITIAL CONTACT RESISTANCE: 20m Ω MAX.


1 IMPRINT COLOR: WHITE
IMPRINT MUST PASS THE FOLLOWING TEST: RUB MARKINGS BY HAND,
WITHOUT UNDUE PRESSURE, FOR 30 SECS. WITH A CLOTH SOAKED
WITH ISOPROPYL ALCOHOL. MARKINGS MUST REMAIN INTACT.

TERMINALS: .031 $\pm$.002[0.8 $\pm$ 0.03]X.248+.004/- .002[6.3+0.1/-0.05]
HOLE Ø.067 $\pm$.004[1.7 $\pm$ 0.1]

1 SEE IMPRINT DETAIL

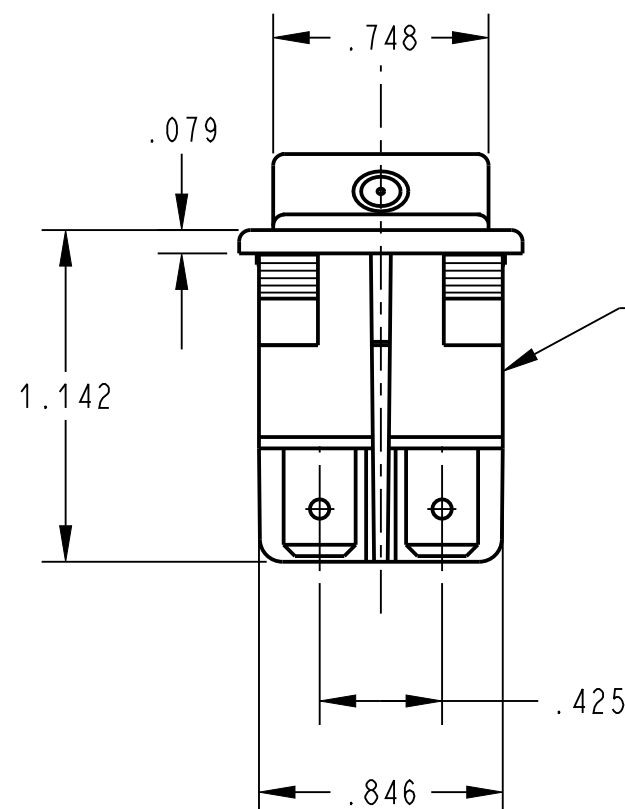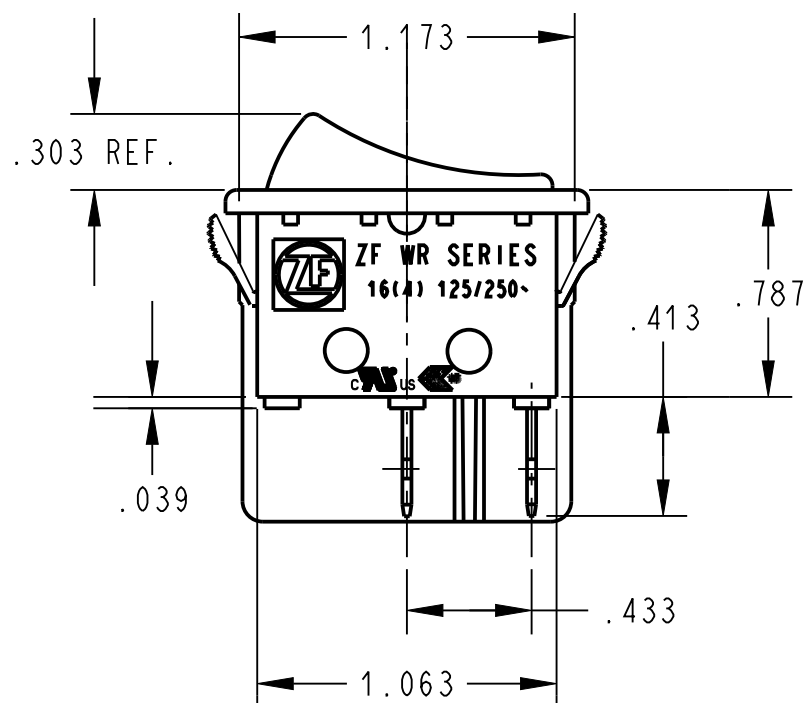

MARKING

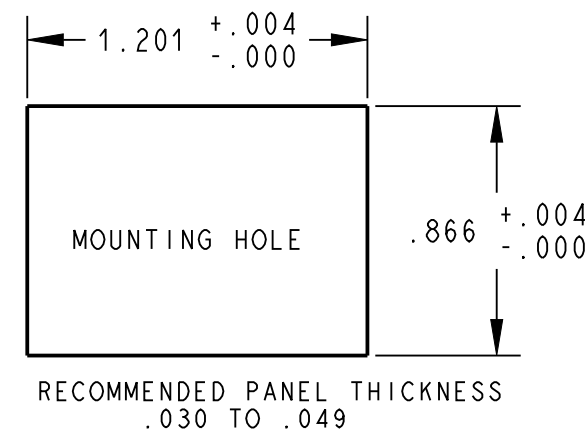


DWN: R.YANEZ

APVD: E. LESLIE

DATE: 19-OCT-09

THIRD ANGLE PROJECTION



F	Z000724324	2024-02-29	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR
4000000138

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. WRG32F2BBBNN-13

SCALE: 2 : 1 SH 1 OF 1