
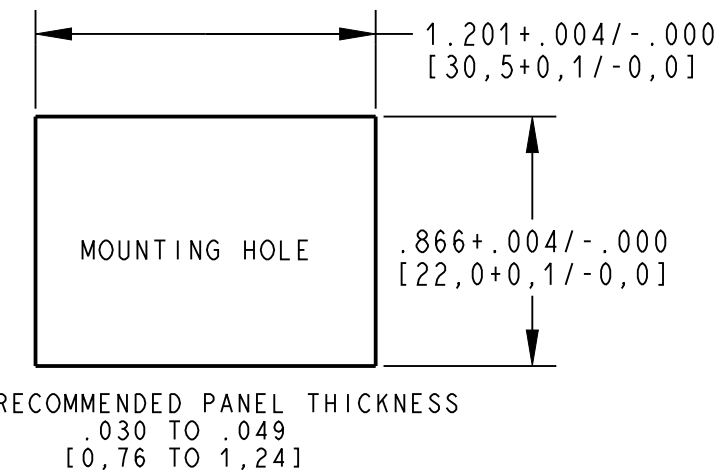
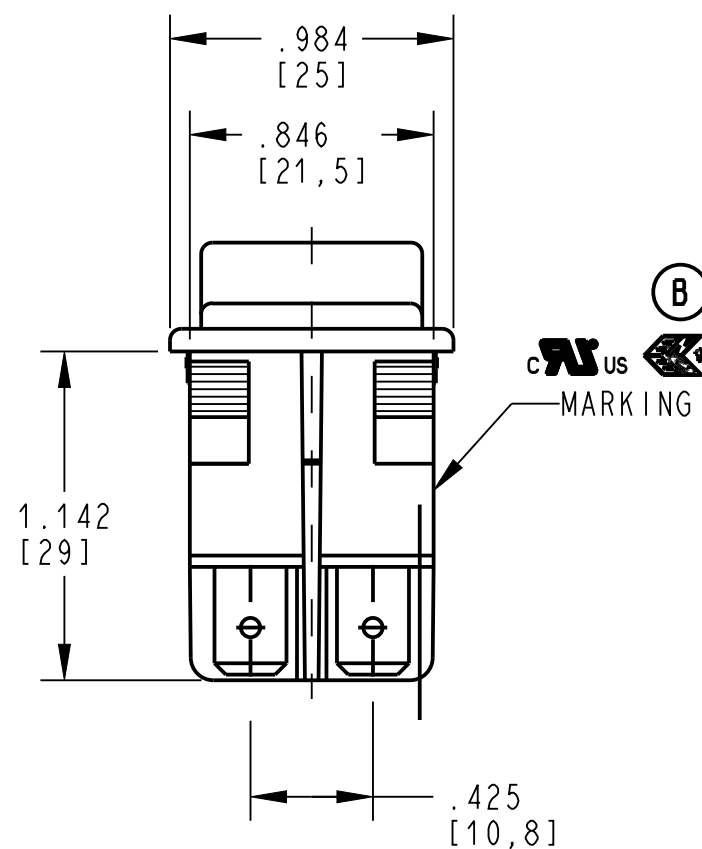
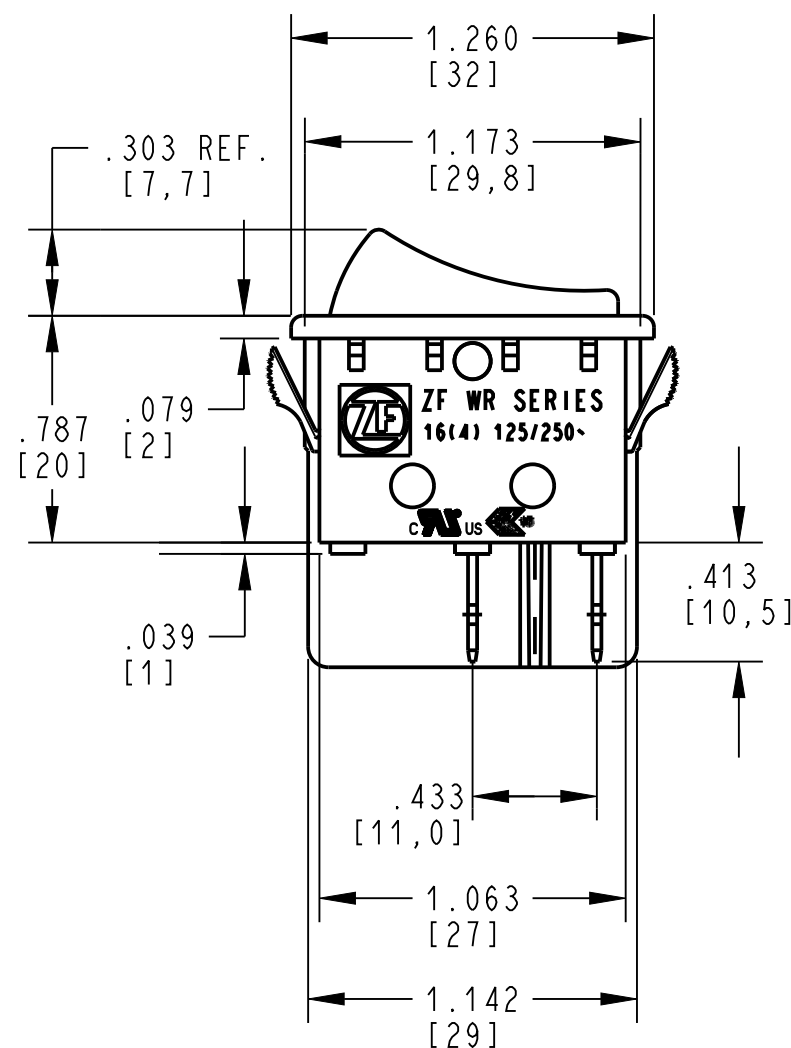
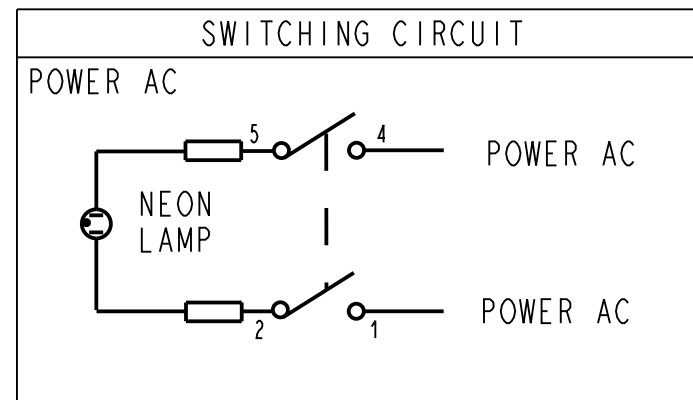


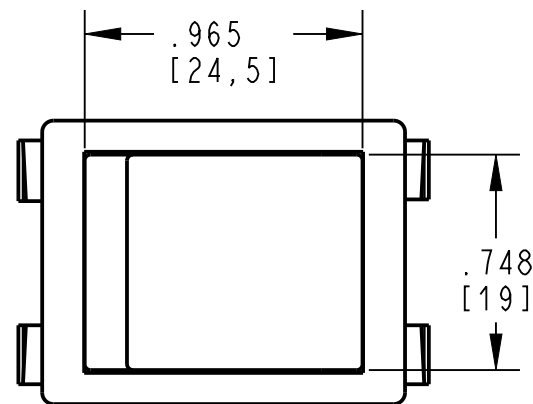

NOTES: (UNLESS OTHERWISE SPECIFIED):

1. RATING TO BE MARKED ON ROCKERS:

16A, 125 VAC 1/4HP
 16A, 250VAC 1/4HP
3/4HP 250 VAC.

16(4)A 125/250V~

16(4)A, 250VAC~ T125/55 10E3

2. ILLUMINATION 100~125 VAC.

3. DIELECTRIC WITHSTAND VOLTAGE: 1500VAC FOR 1 MINUTE.

INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC

INITIAL CONTACT RESISTANCE: 20m Ω MAX.

TERMINALS: .031 $\pm$.001 [0,8 $\pm$ 0,03]X.248+.004/-0.002 [6,3+0,1/-0,05]
HOLE $\varnothing$.067 $\pm$.004 [1,7 $\pm$ 0,1]

DWN: JPD
APVD: ELL
DATE: 07-Mar-18
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

B	Z000724324	2-29-2024	TCH	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

WRG SERIES DPST, QC, LIGHTED

B ITEM NO. WRG32F2BBRLN

SCALE: N/A SH 1 OF 1