




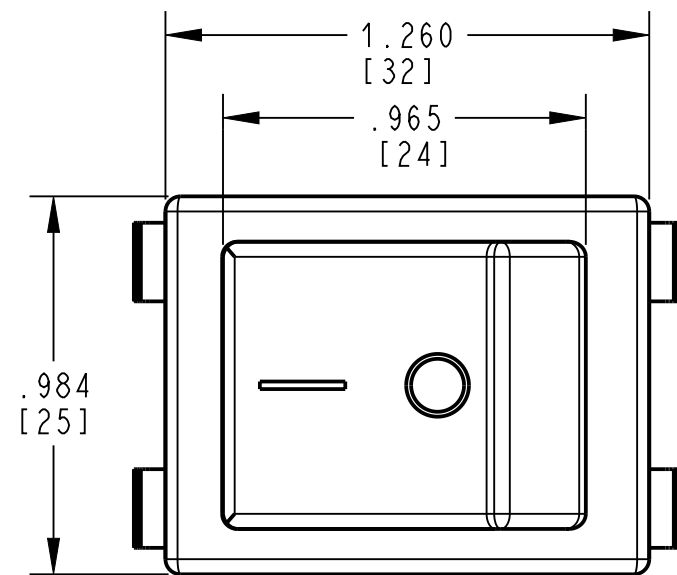

SCALE 1:1

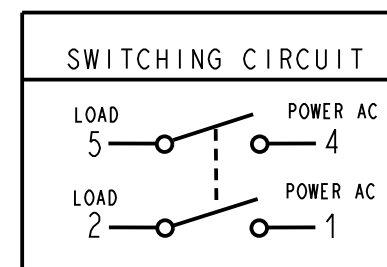

NOTES: (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON ROCKERS:




CAUS 16A, 125/250 VAC 1/4HP
16A, 250VAC 1/4HP
3/4HP 250 VAC.

CAUS 16(4)A, 250VAC T125/55 10E3

CAUS 16(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1000VAC FOR 1 MINUTE.
INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20m Ω MAX.


TERMINALS: .031 $\pm$.002[0.8 $\pm$ 0.03]X
.248 $\pm$.004/- .002[6.3 $\pm$ 0.1/-0.05]
HOLE $\varnothing$.067 $\pm$.004[1.7 $\pm$ 0.1].

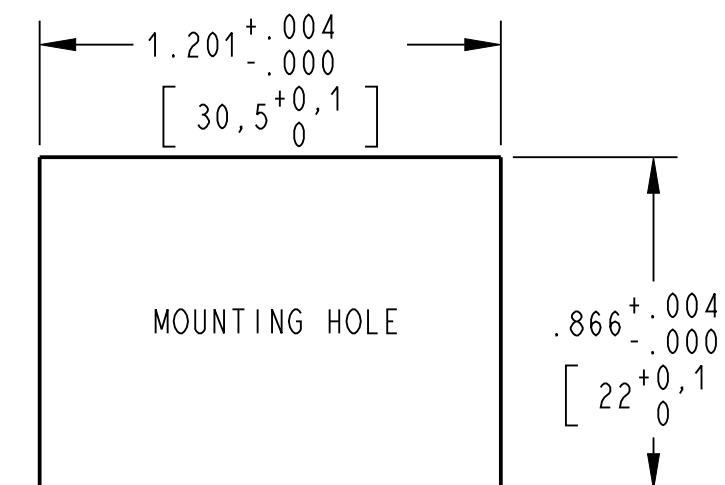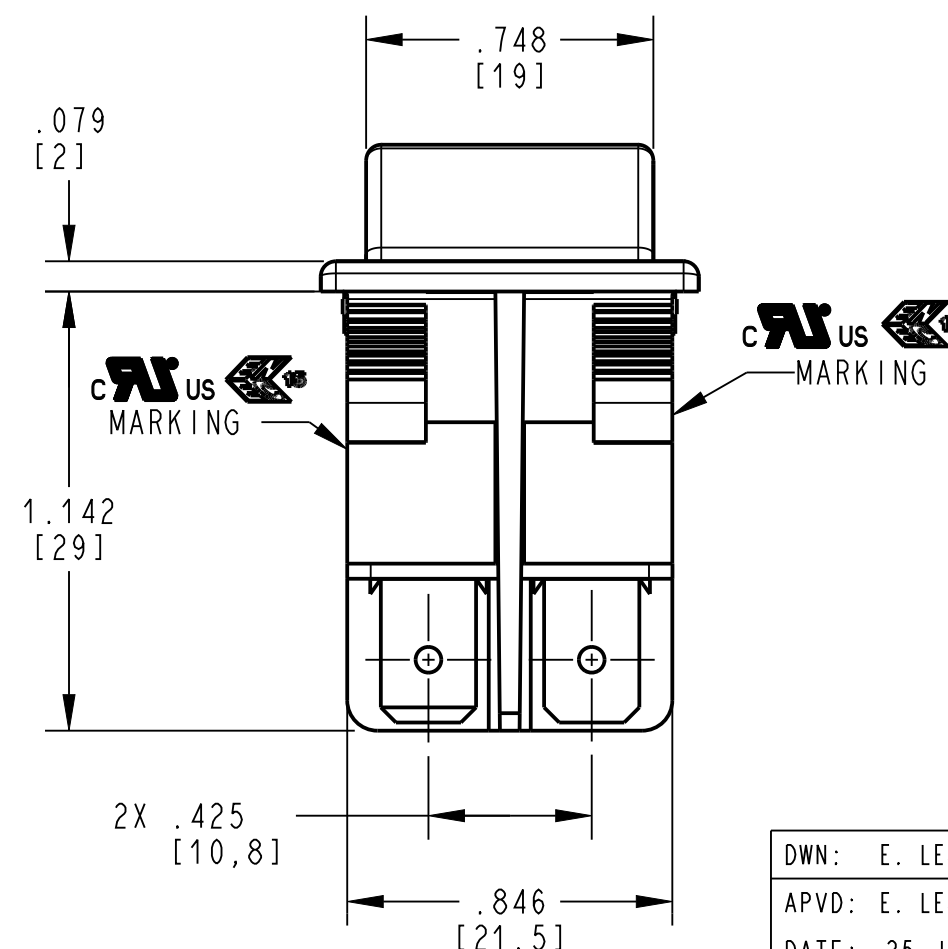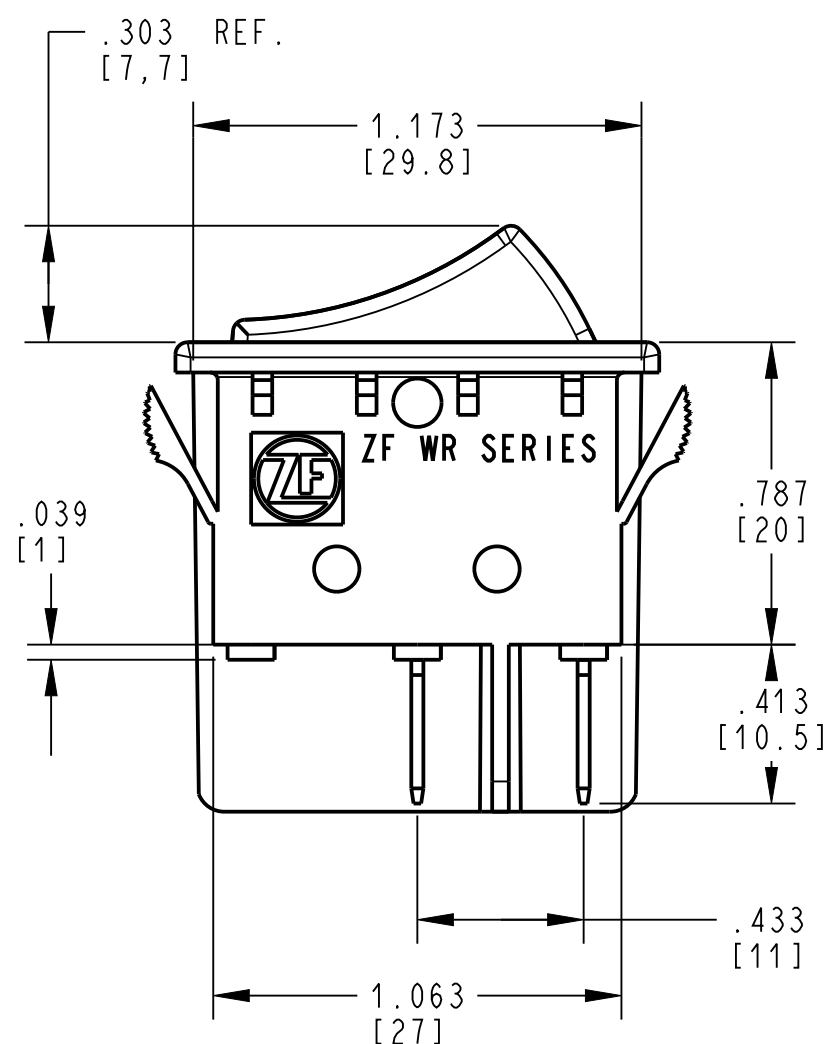

RECOMMENDED PANEL THICKNESS
.030 TO .049
[0.75mm TO 1.25mm]

DWN: E. LESLIE
APVD: E. LESLIE
DATE: 25-JUN-25

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. WRG32F2FBBNN

SCALE: 2:1 SH 1 OF 1

A		2025-06-25	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °