

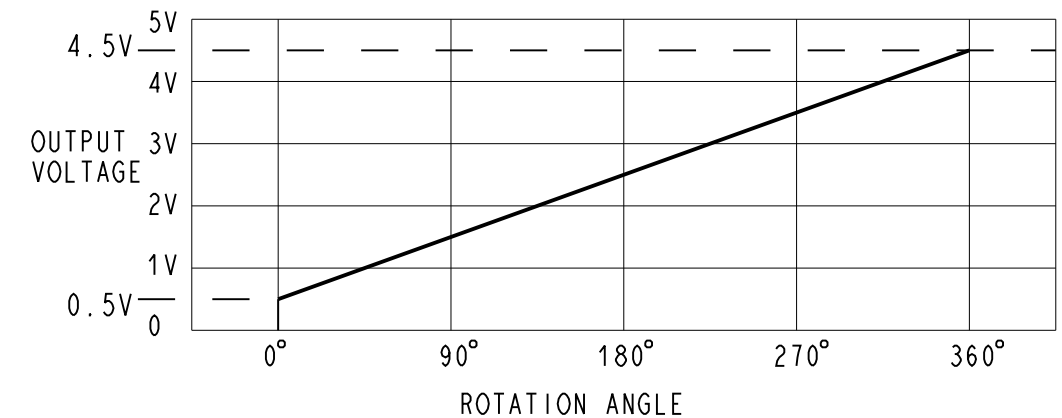
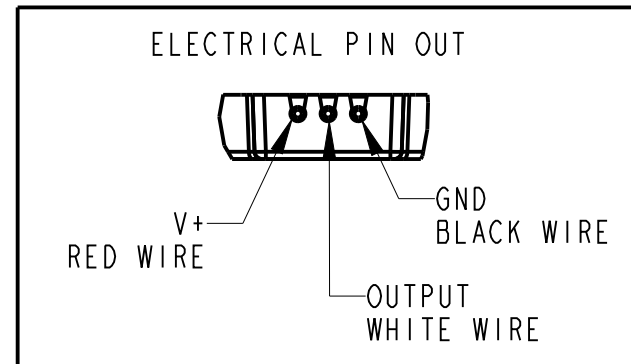
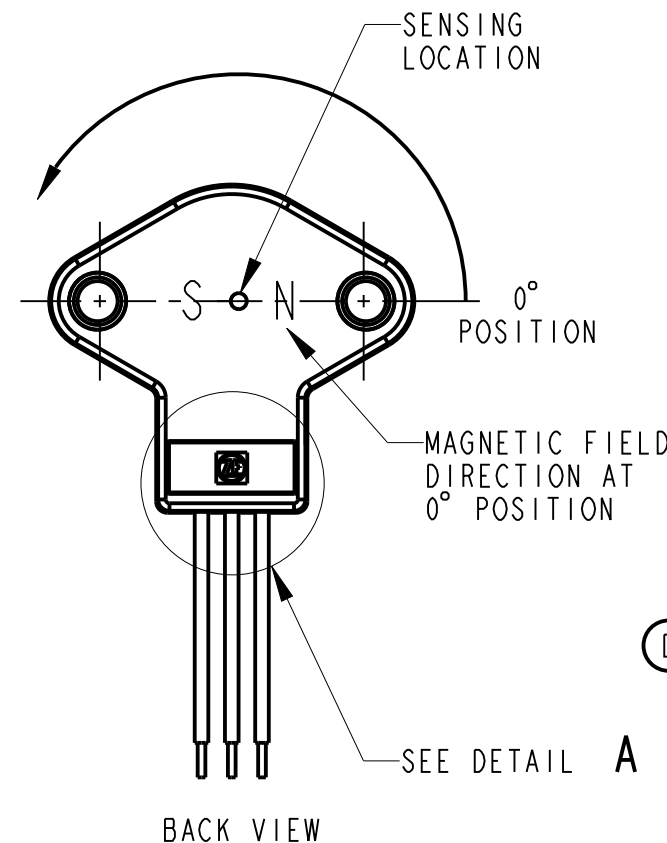


DETAIL B
SCALE 4:1

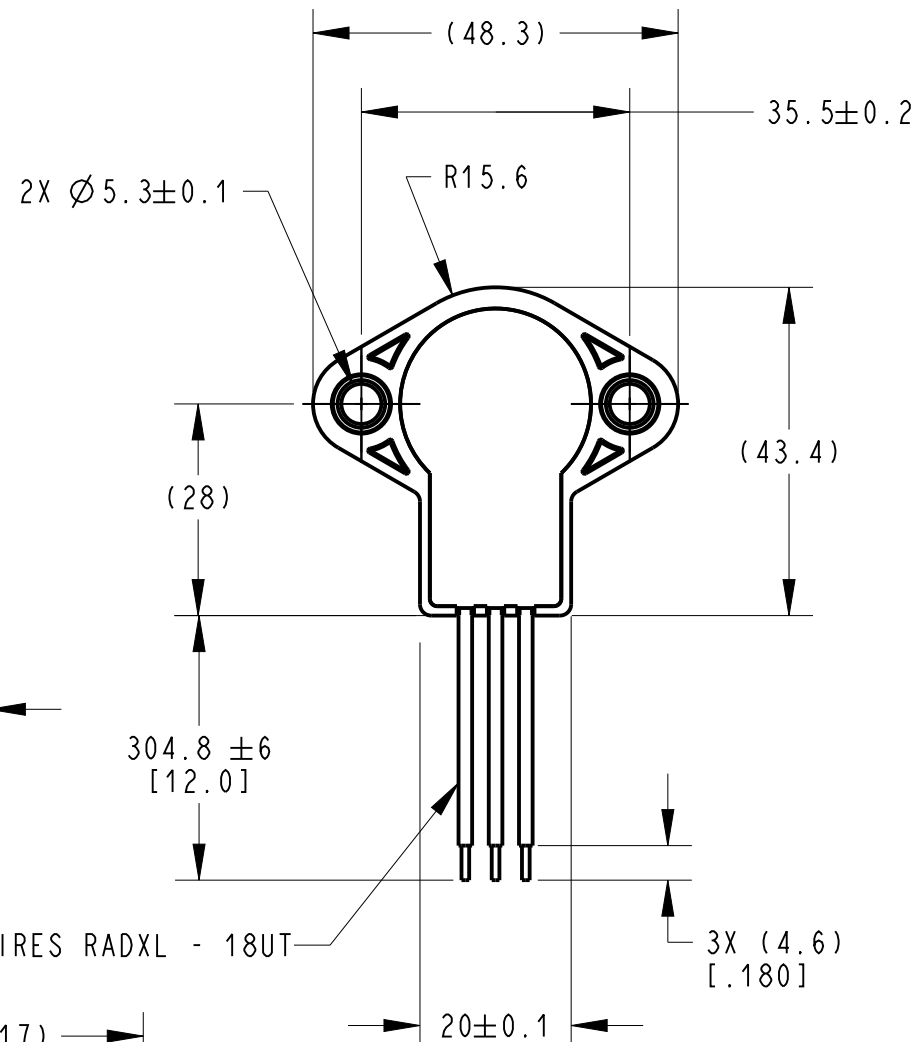


SENSOR OUTPUT SIGNAL
(TYPICAL BASED ON 5V SUPPLY)


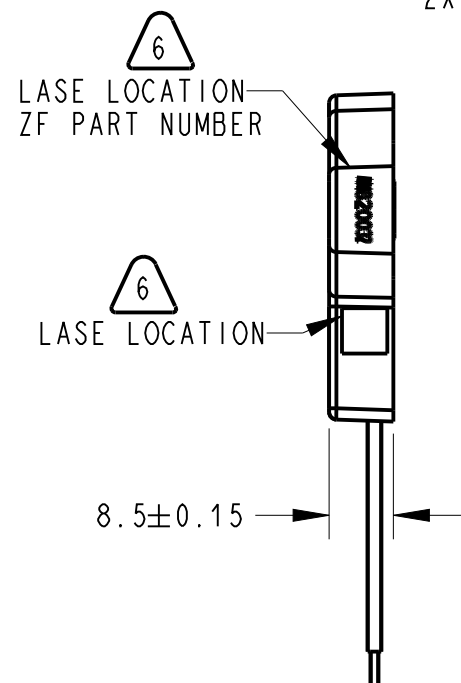


NOTES:

1. RECOMMENDED FASTENER: M5 SCREW
2. RECOMMENDED TORQUE: 3.96 N.m [35 lbs.in] (CLASS 5.8, DRY)
3. REFERENCE ZF ELECTRONIC SYSTEMS SPECIFICATION PSPEC-00077 FOR PRODUCT CHARACTERISTICS NOT SPECIFIED ON THIS DRAWING
4. ALL SENSOR'S ARE 100% FUNCTIONALLY TESTED.
5. OPERATING TEMPERATURE RANGE: -40°C TO +150°C
6. LASE MARKING INFORMATION:
AN820032
MEXICO
ZF DATE CODE AND TESTER I.D.
(YR/WK/-A, B OR C)
SERIAL NUMBER (4 DIGITS)
7. RoHS COMPLIANT PART.

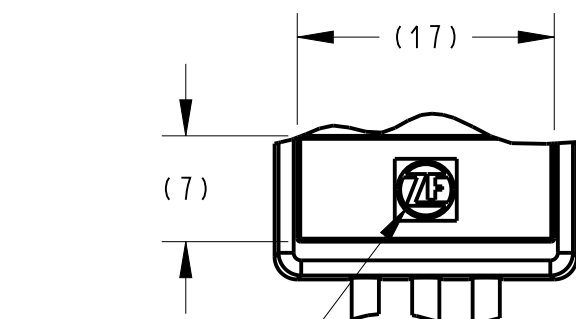


DETAIL A
SCALE 2:1

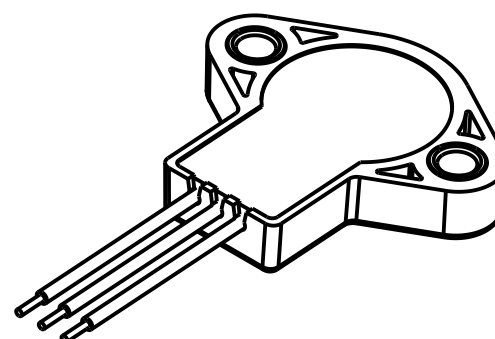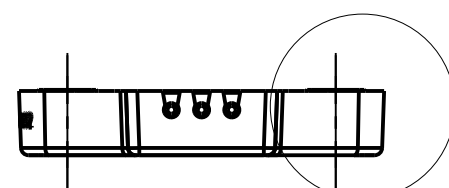

TRIMETRIC VIEW

DWN: C RAMOS
APVD: T BURNETT
DATE: 07-NOV-08

THIRD ANGLE PROJECTION



PROJECT/ CSR

D	Z000522920	2019-10-09	RJC	TB
REV	ECO NO.	DATE	PREP	APVD






TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
MM	± 0.30	± 0.100	± 1.0 °

 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A.			
NAME / DESCRIPTION AN8 W/WIRE, 360 DEGREE			
B	ITEM NO. AN820032		
SCALE: 1:1		SH 1	OF 2


8 7 6 5 4 3 2 1

F
E
D
C
B
A

F
E
D
C
B
A

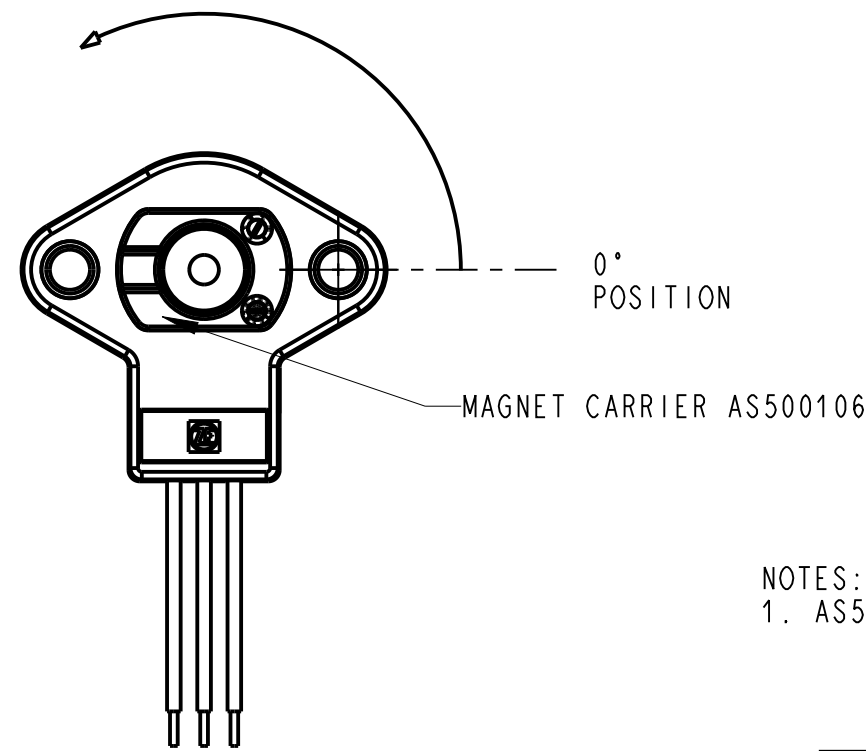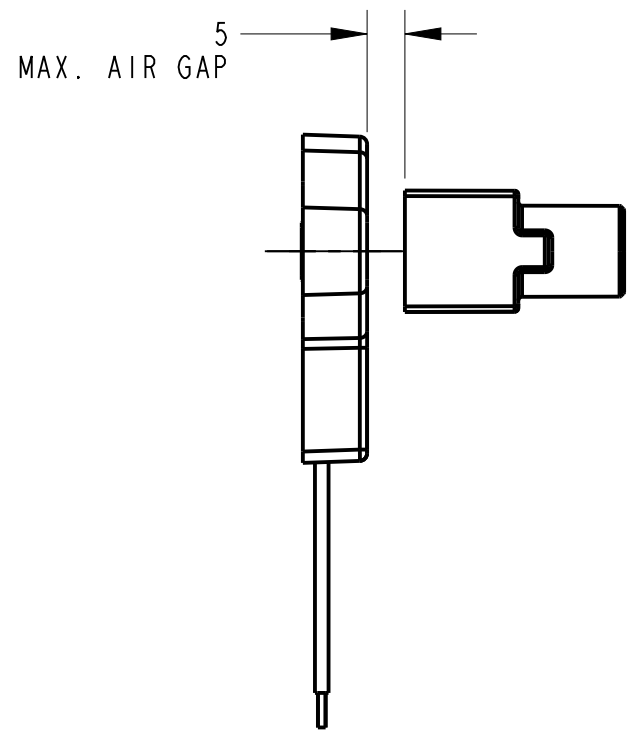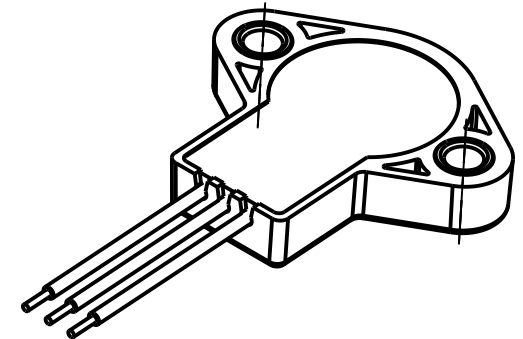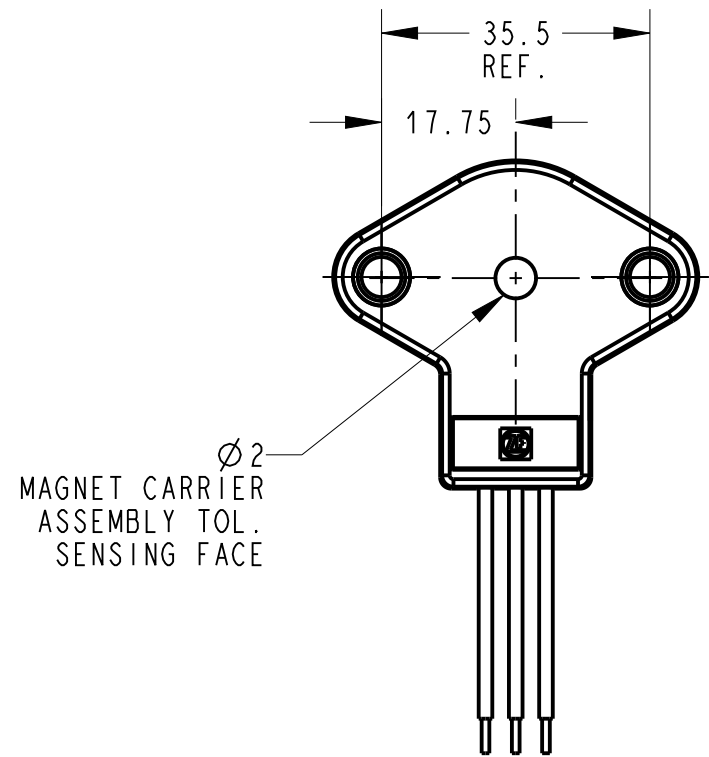

NOTES:
1. AS500106 (FOR REFERENCE ONLY) NOT INCLUDED WITH THIS PRODUCT



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

B ITEM NO. AN820032

REV: D SH 2 OF 2

8 7 6 5 4 3 2 1

ORIGINAL ON PRO/E