
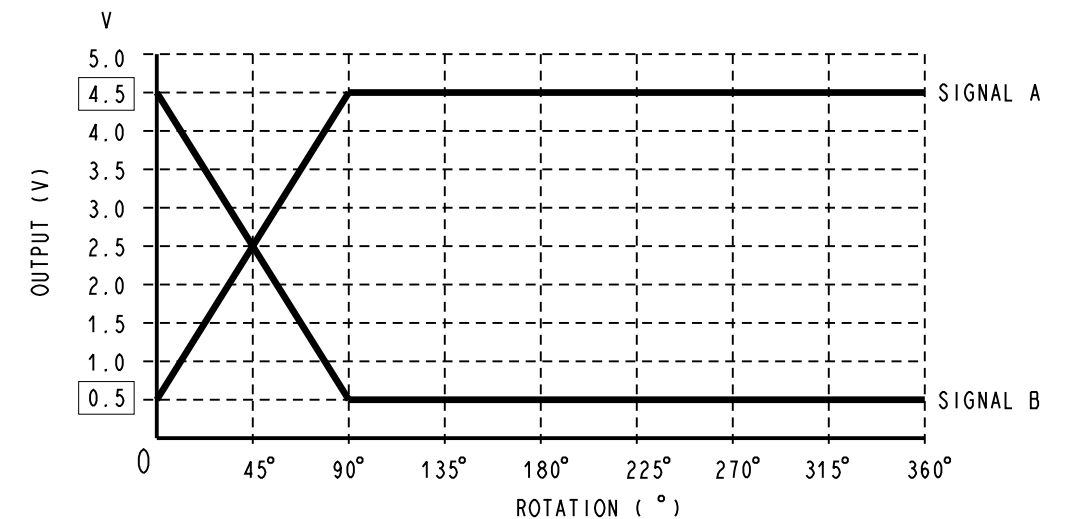
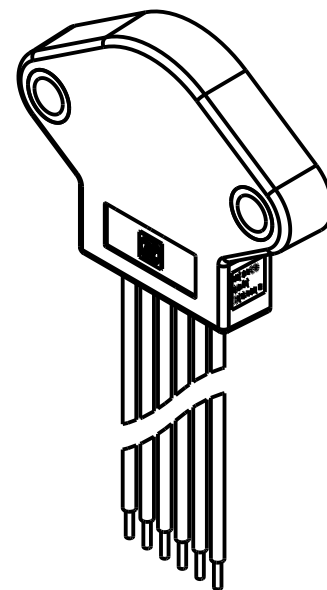
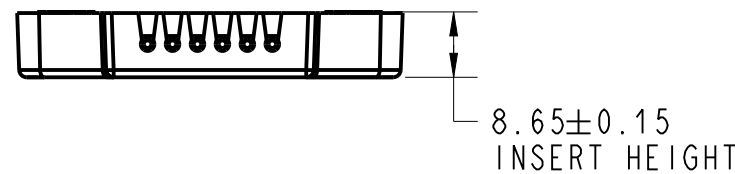
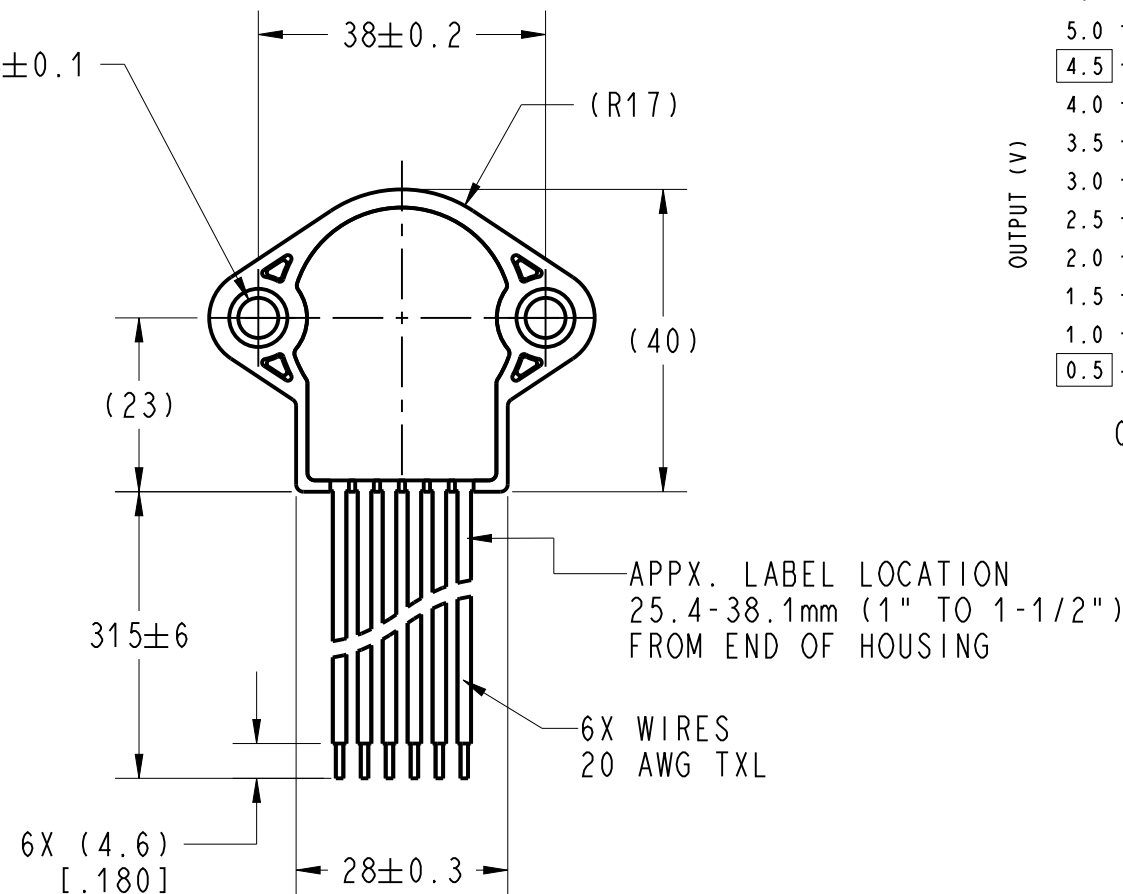
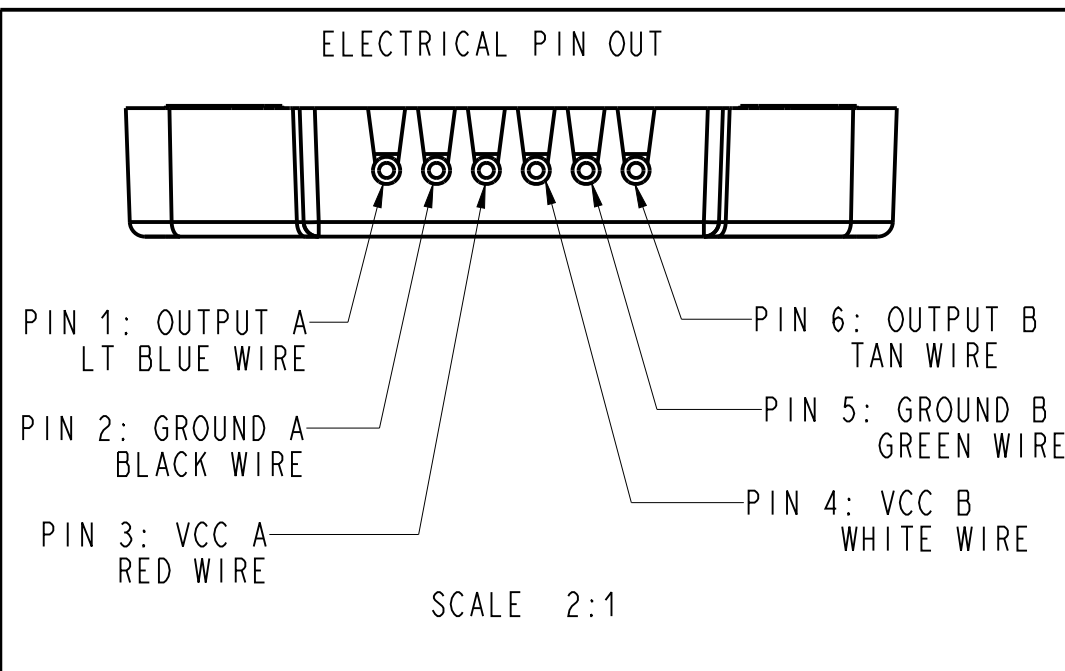
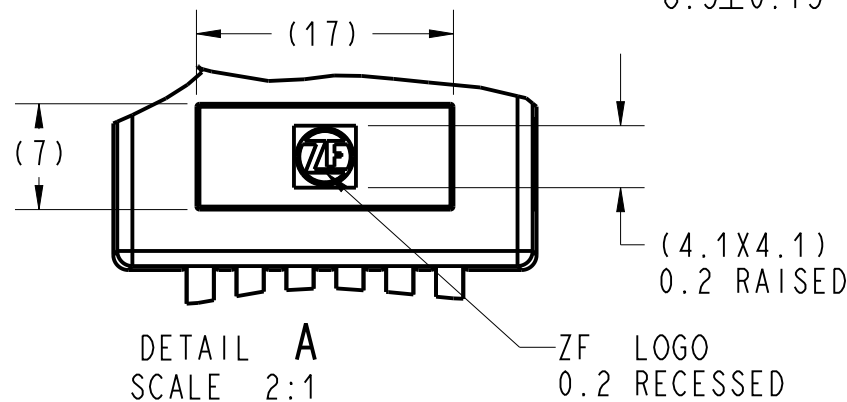


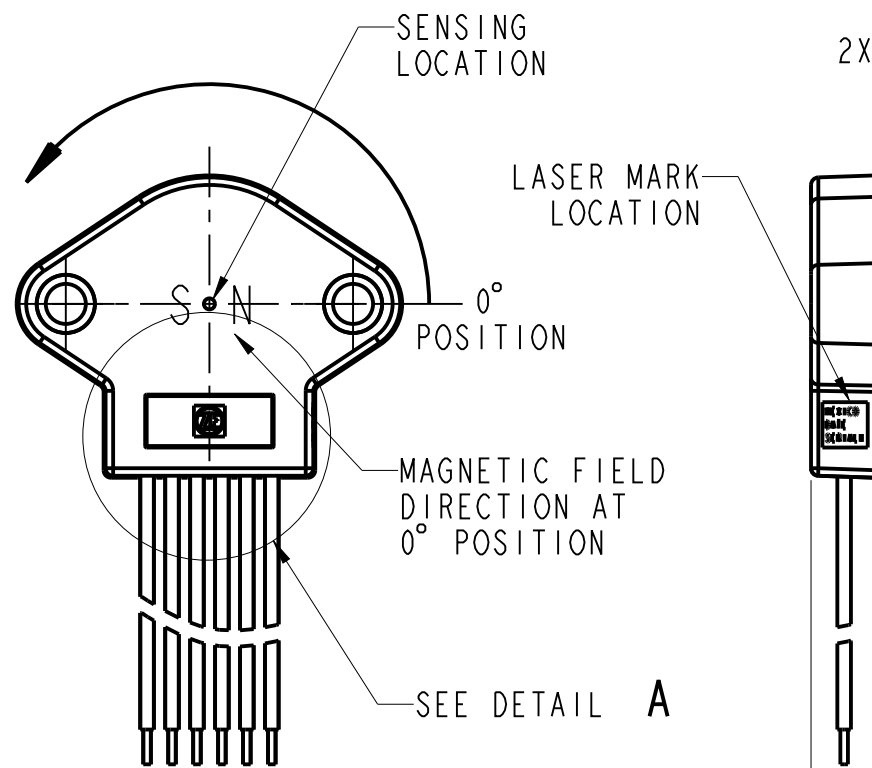


SENSOR OUTPUT SIGNAL
(TYPICAL BASED ON 5V SUPPLY)
DISCONTINUITY POINT A AT ~ 270°
DISCONTINUITY POINT B AT ~ 90°

- NOTES:
- RECOMMENDED FASTENER: M5 SCREW
 - RECOMMENDED TORQUE: 3.96 N.m [35 lbs.in]
(CLASS 5.8, DRY)
 - REFERENCE ZF ELECTRONIC SYSTEMS PRODUCT SPECIFICATION
PSPEC-00072 FOR PRODUCT CHARACTERISTICS NOT
SPECIFIED ON THIS DRAWING.
 - ALL SENSOR'S ARE 100% FUNCTIONALLY TESTED.
 - OPERATING TEMPERATURE RANGE: -40°C TO +125°C
 - ① LASE MARKING INFORMATION:
MEXICO
ZF ELECTRONIC SYSTEMS DATE CODE AND TESTER
I.D. (YR/WK/-A, B OR C)
SERIAL NUMBER (4 DIGITS)
 - RoHS COMPLIANT PART.
 - PROGRAM LABEL INFORMATION: (LABEL COLOR YELLOW)
ZF ELECTRONIC SYSTEMS PART NUMBER
0°-90°
 - PROGRAM LABEL LOCATION:
25.4-38.1mm (1" TO 1-1/2") FROM END OF HOUSING ON
TAN WIRE.
 - THIS PRODUCT IS SOLD UNDER THE ZF BRAND.

DWN: C. MORALES
APVD: CH. YTTRI
DATE: 02-Jun-10

THIRD ANGLE PROJECTION



PROJECT/ CSR
10-0029/B

D	Z000522920	09-Oct-19	RJC	TB
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.X	X.XX	ANGLES
mm	± 0.3	± 0.10	± 1.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

AN9 DUAL OUTPUT W/WIRES, 0°-90°

B ITEM NO. AN920036

SCALE: 1:1 SH 1 OF 1

ORIGINAL ON PRO/E