

NOTES: (UNLESS OTHERWISE SPECIFIED)

1.  RATING TO BE MARKED ON HOUSING:
20A, 125 VAC
16A, 250 VAC
3/4 HP 250 VAC







   16(4)A 250V ~T125/55 10E3

2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.
5. NEON BULB - COLOR: GREEN
ON-OFF ILLUMINATION: 100~125VAC

 TERMINALS:
.248 $\pm$.004/-0.002; [6.3 $\pm$ 0.1/-0.05] WIDE
.031 $\pm$.001; [0.8 $\pm$ 0.03] THICK
.067 [1.7] HOLE ϕ
QUICK CONNECTS.

7. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

8. FOR NAMING AND MARKINGS SPECIFICATIONS SEE ES021255.

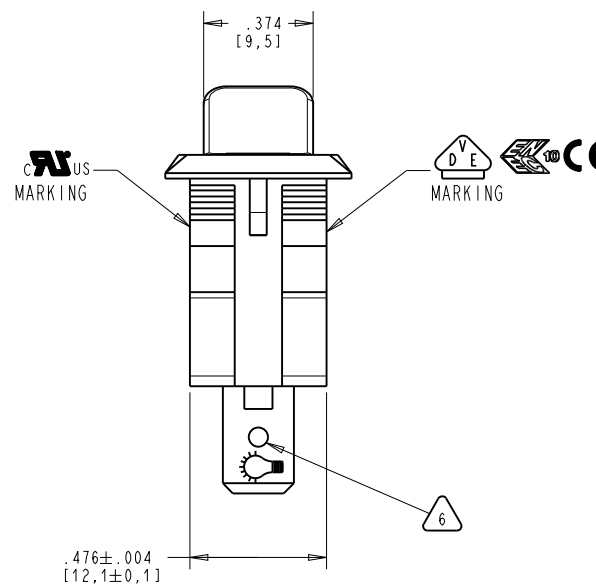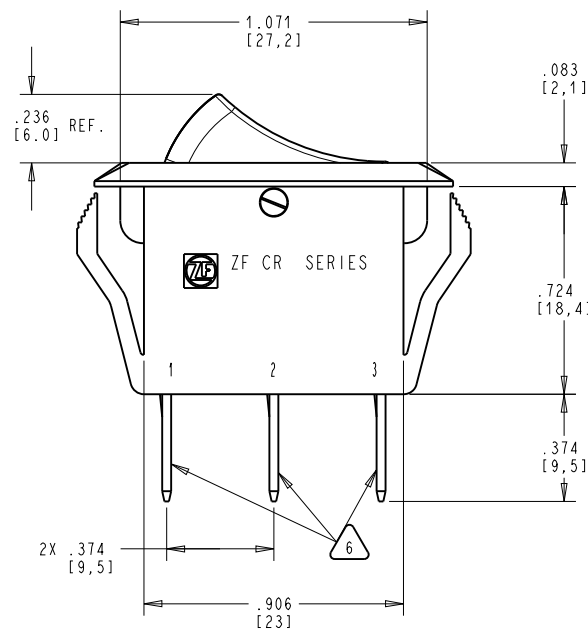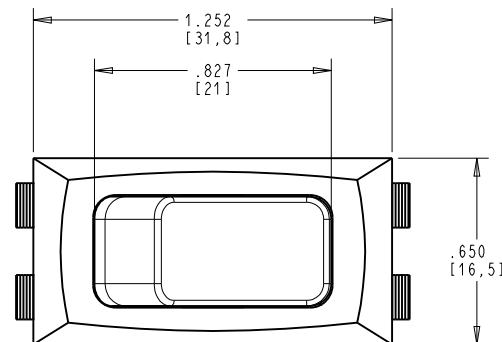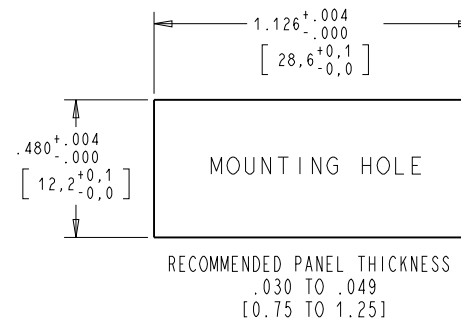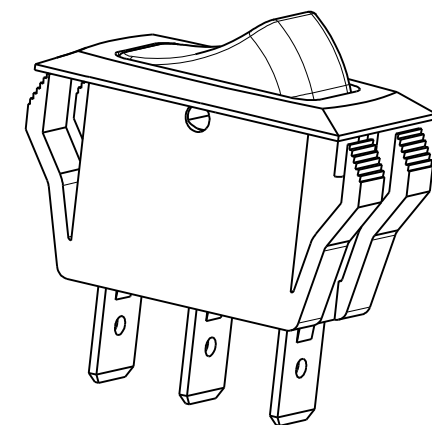

DWN: F.BURCIAGA				 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION SPEC DRAWING			
APVD: E.LESLIE							
DATE: 23-Oct-13							
THIRD ANGLE PROJECTION							
							
				TOLERANCE UNLESS SPECIFIED			
PROJECT / CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO. CRE22F2BBGLE
PVD	N/A	INCH	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °	SCALE: 3.000	SH 1 OF 1

ORIGINAL ON PROJE