





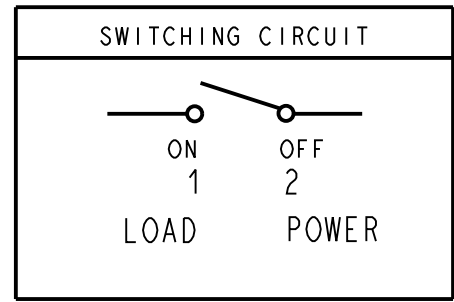


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON HOUSING
20A 125 VAC
16A, 250 VAC
3/4 HP 250 VAC


CE  16(4)A 250V~ T125/55

2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.
5. ELECTRICAL LIFE: 10,000 CYCLES
6. ACTUATOR COLOR: BLACK
HOUSING COLOR: BLACK
7. TERMINALS (2): QUICK CONNECT, $.248 \pm .004 / -.002$ [6,3+0,1/-0,05]
 $X.031 \pm .001$ [0,8 $\pm$ 0,03] THK, HOLE DIA. $.067$ [1,7]
8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
9. FOR NAMING AND MARKINGS SPECIFICATIONS SEE ES021255.

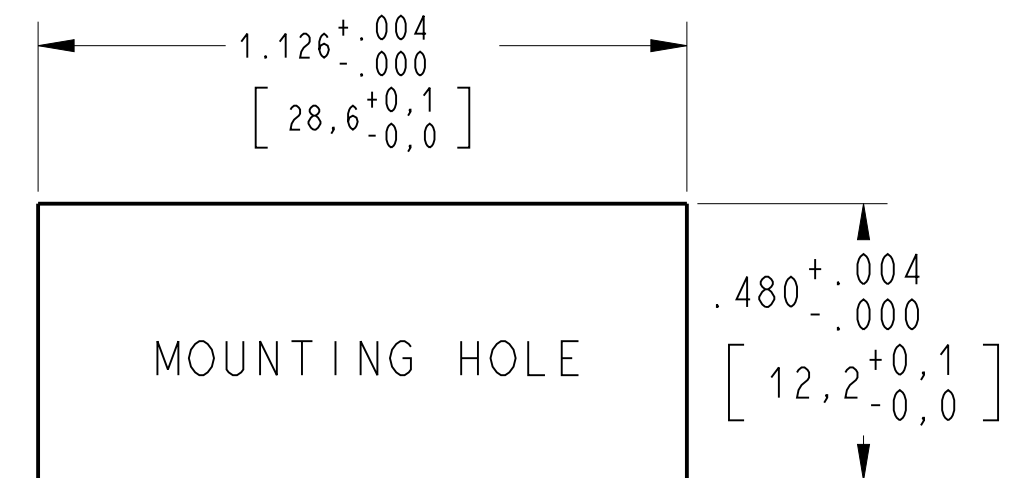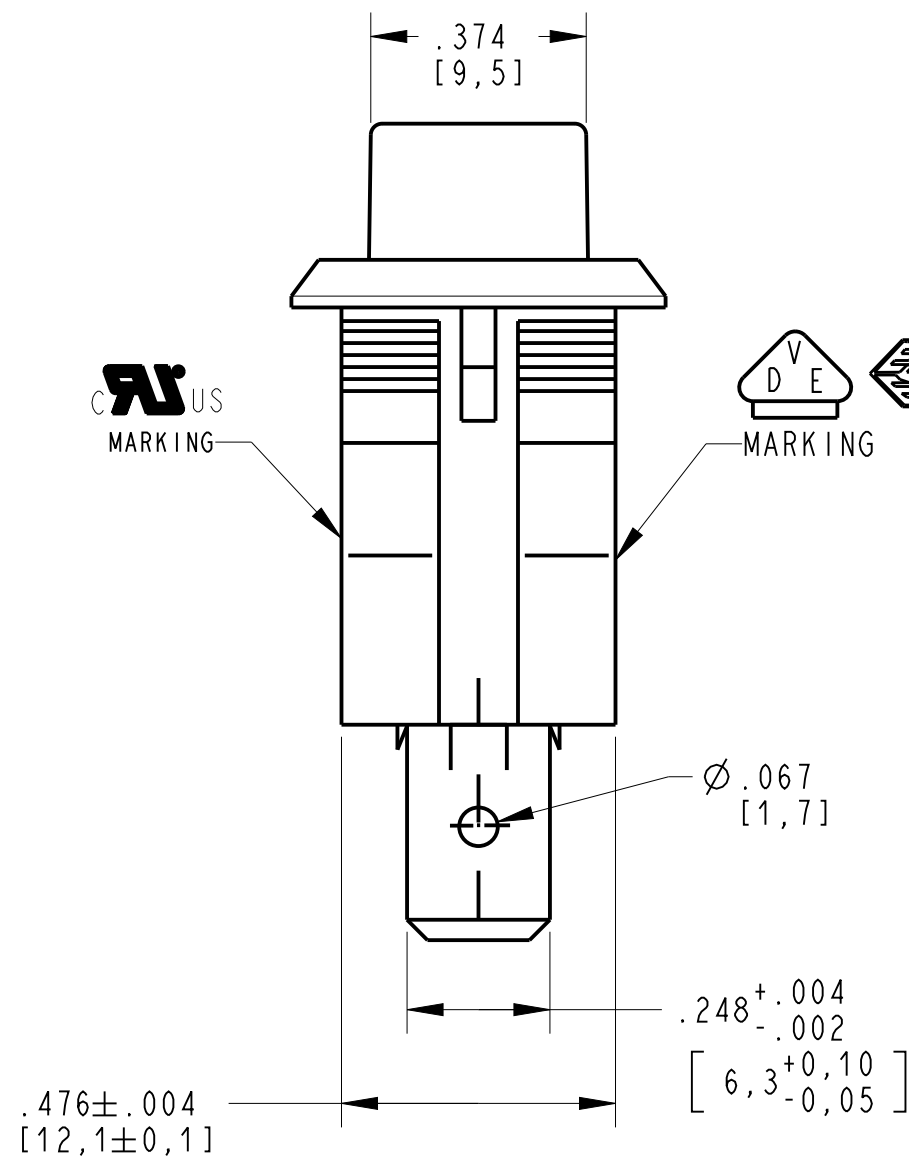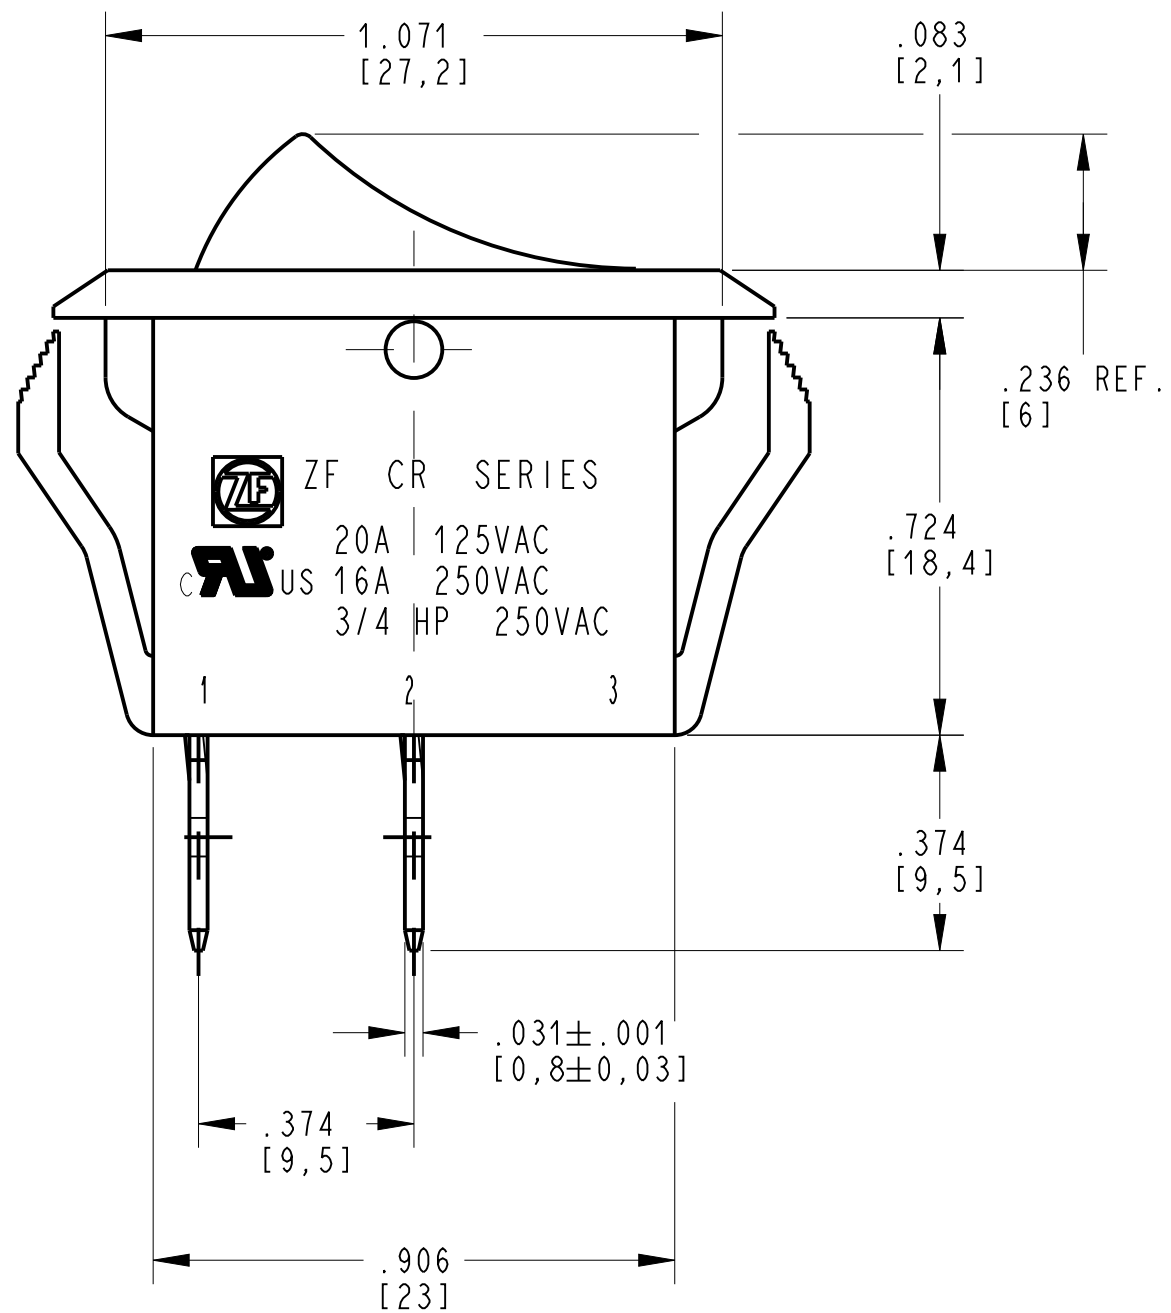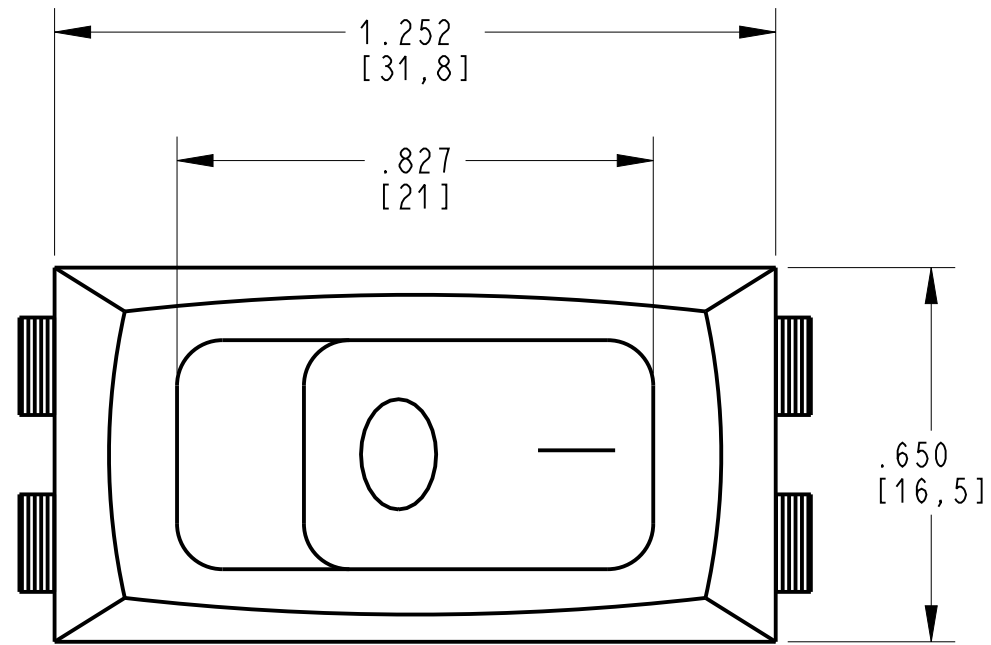

RECOMMENDED PANEL THICKNESS
.030 TO .049
[0,75 TO 1,25]

DWN: JPD
APVD: ELL
DATE: 12-Apr-18
THIRD ANGLE PROJECTION



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPEC DRAWING

A	Z000451162	12-Apr-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

PROJECT/ CSR	DWG UNITS	X.XX	X.XXX	ANGLES
N/A	INCHES	$\pm .02$	$\pm .012$	$\pm 5.0^\circ$

C	ITEM NO.	CRE22F2FBBNE
SCALE:	3.000	SH 1 OF 1