

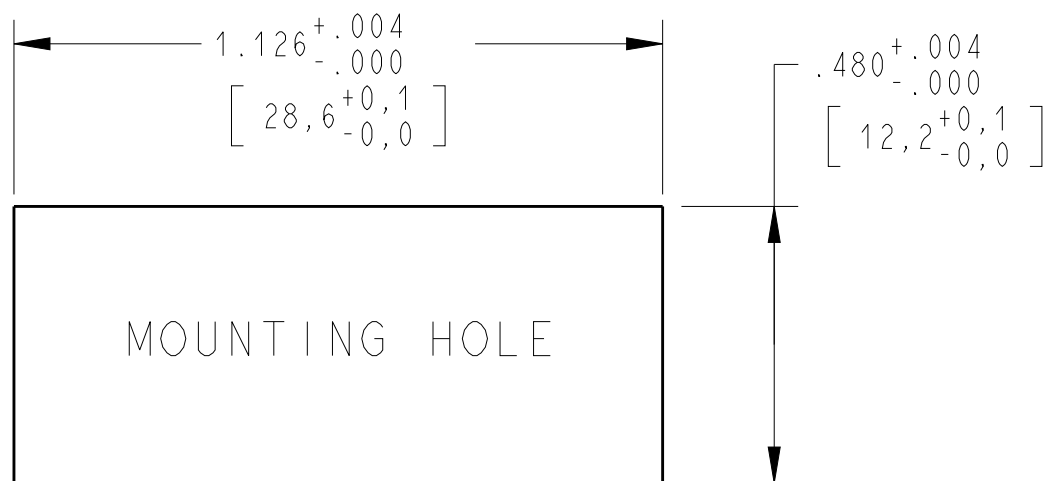
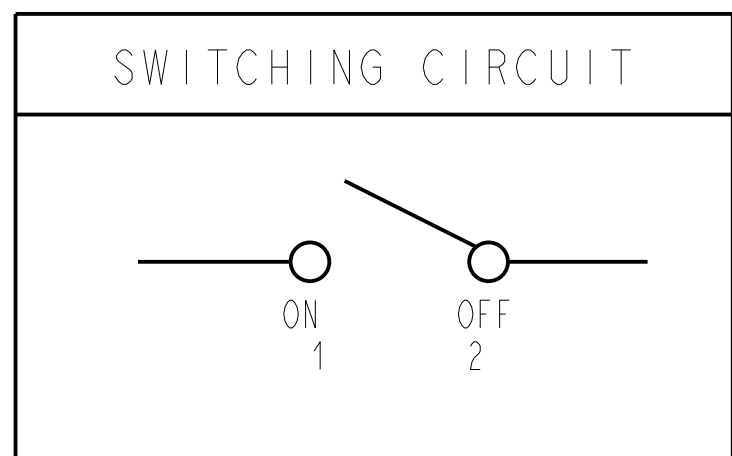
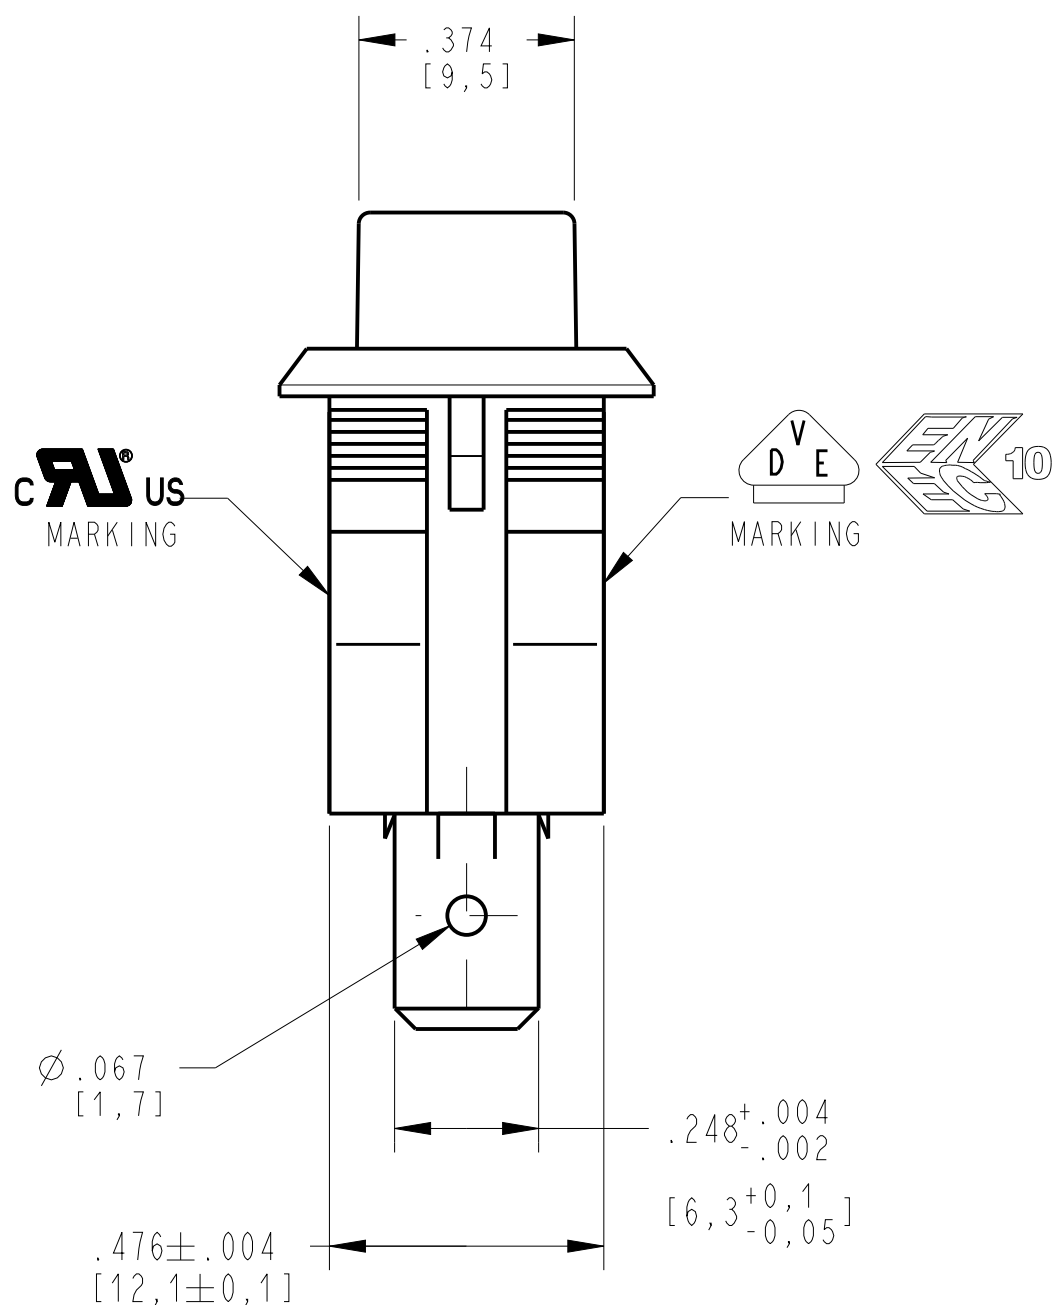


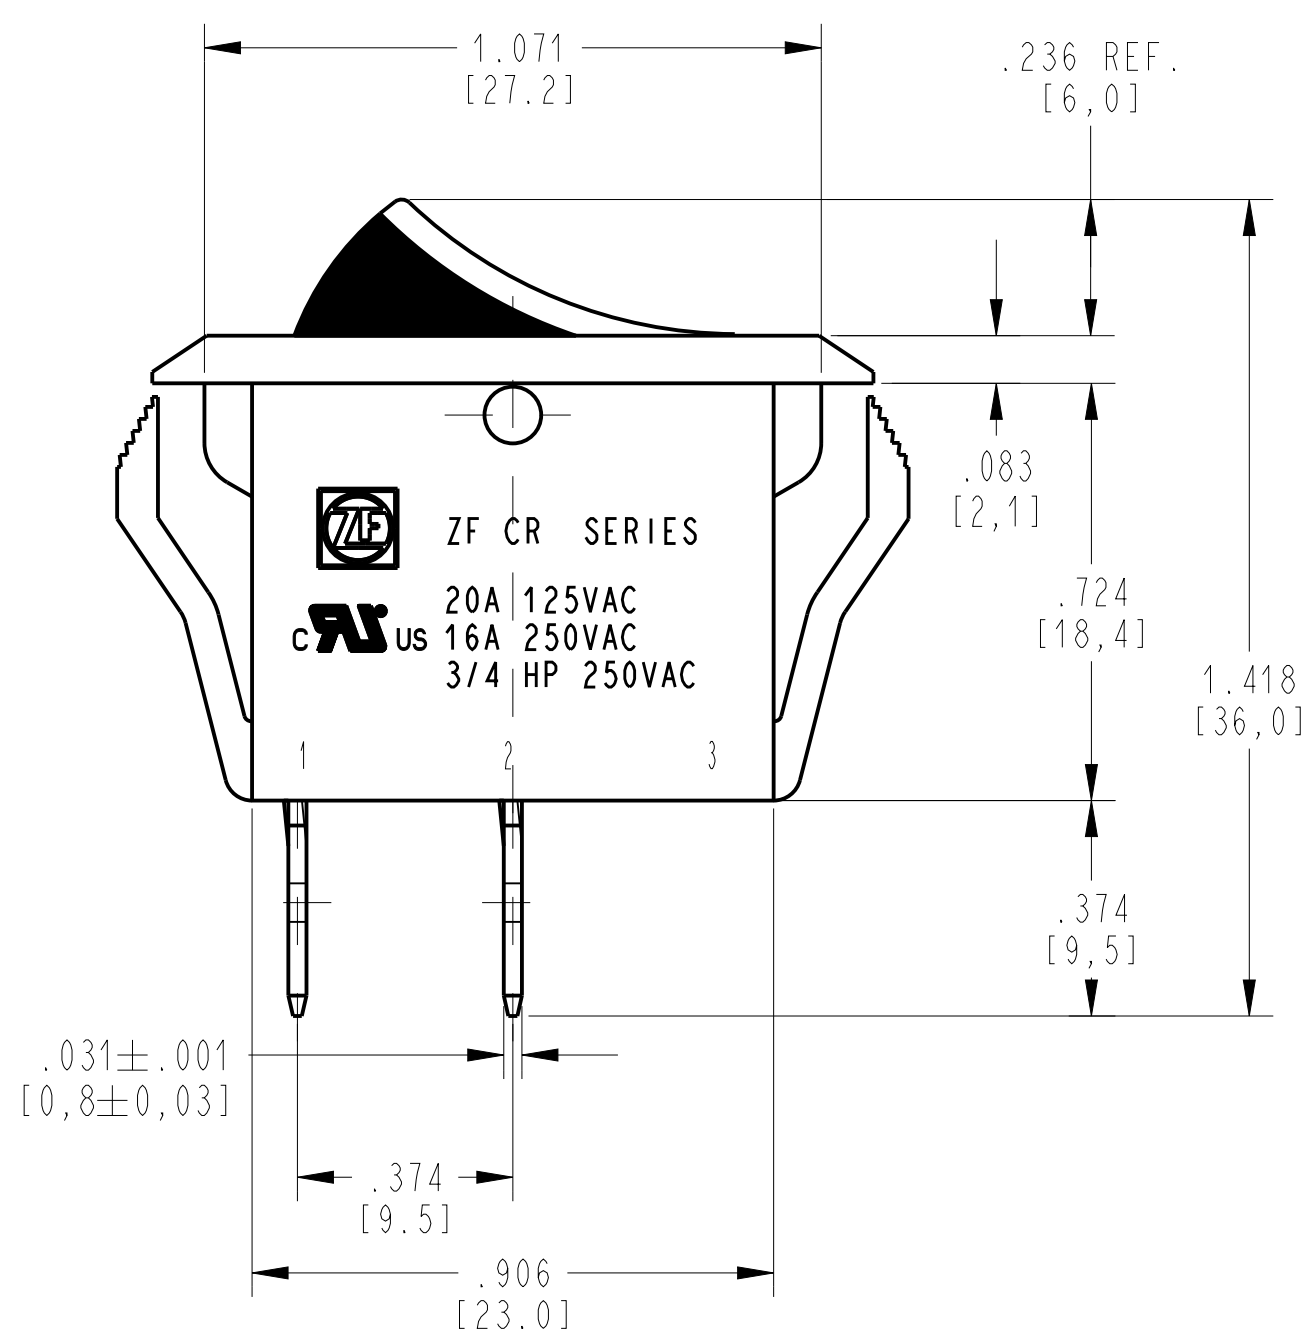

RECOMMENDED PANEL THICKNESS
.030 TO .049
[.75mm TO 1.125mm]

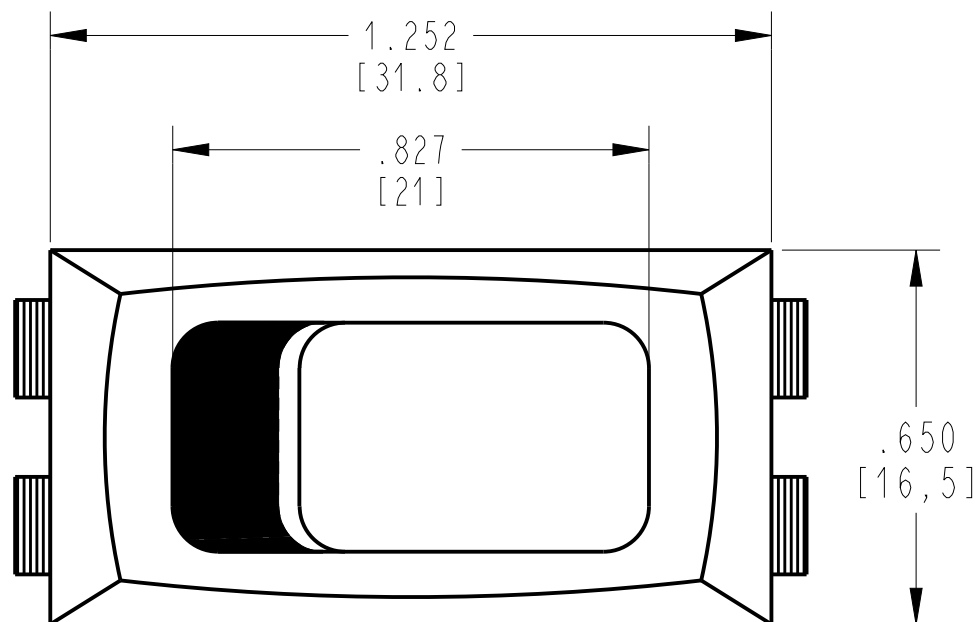

NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATINGS TO BE MARKED ON HOUSING

20A, 125VAC
16A, 250VAC
3/4 HP 250VAC

16(4)A 250V ~ T125/55 10E3

2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE


3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.

4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.

5. DATE CODE FORMAT:
TWO DIGIT WEEK, ONE DIGIT YEAR AND MANUFACTURE LOCATION.
MANUFACTURE LOCATION REPRESENTED BY S - SHIJIE DONGGUAN, CHINA.
EXAMPLE: WEEK 14 YEAR 2013 = 143S.

6. FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.

7. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

DWN: JPD		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION CR-SERIES-SINGLE THROW, QC, TWO COLOR, NON-LIGHTED						
APVD: ELL								
DATE: 06-Dec-17								
THIRD ANGLE PROJECTION								
		TOLERANCE UNLESS SPECIFIED						
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES	C	ITEM NO. CRE22F4BBBNE	
N/A		INCHES	± 0.02	± 0.012	± 5.0 °	SCALE: N/A		SH 1 OF 1

A	Z000435616	06-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD