

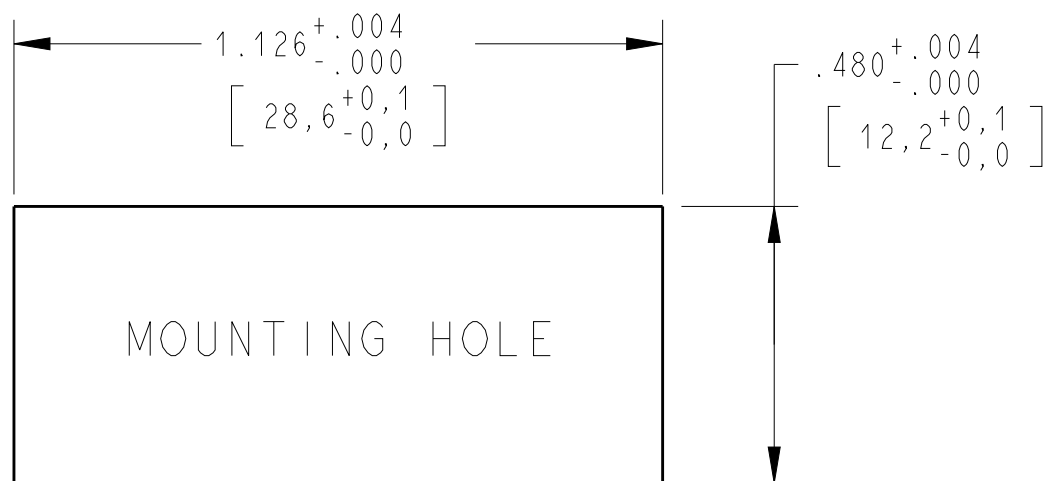
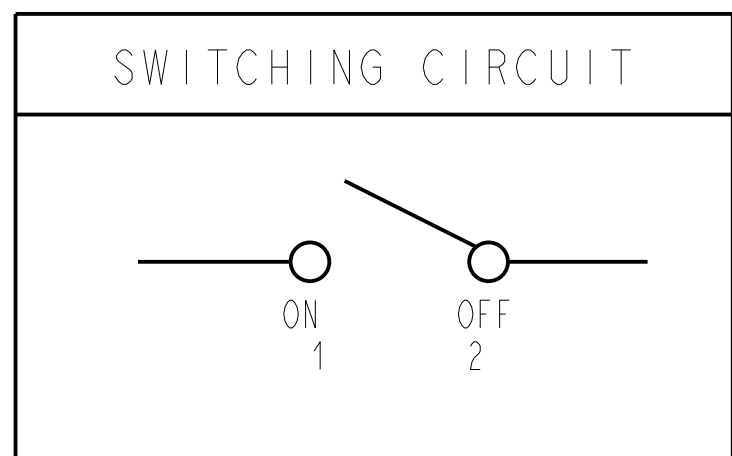
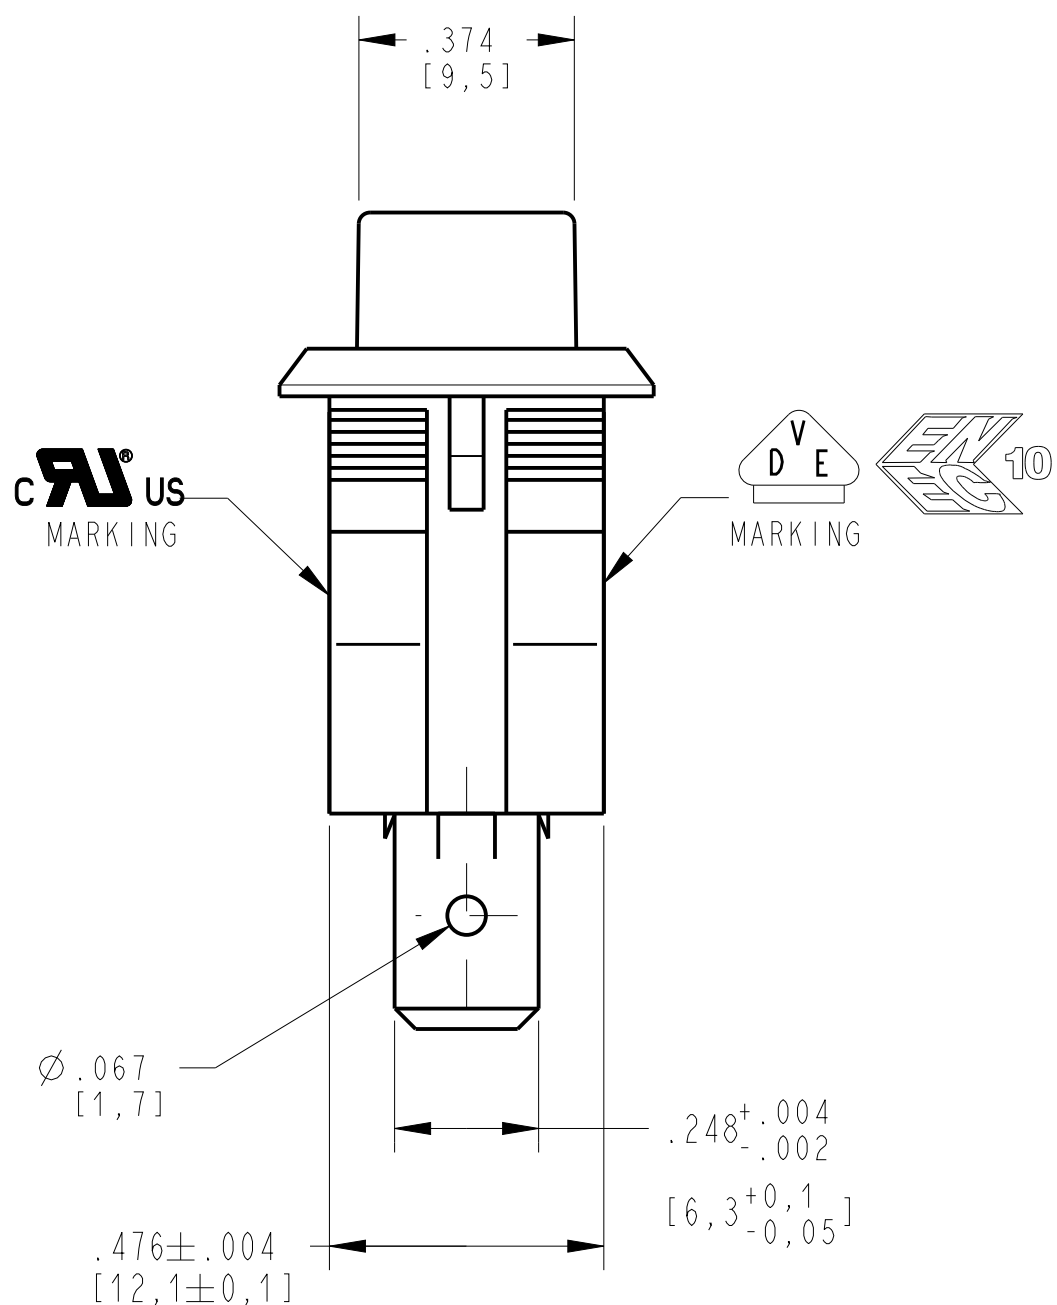


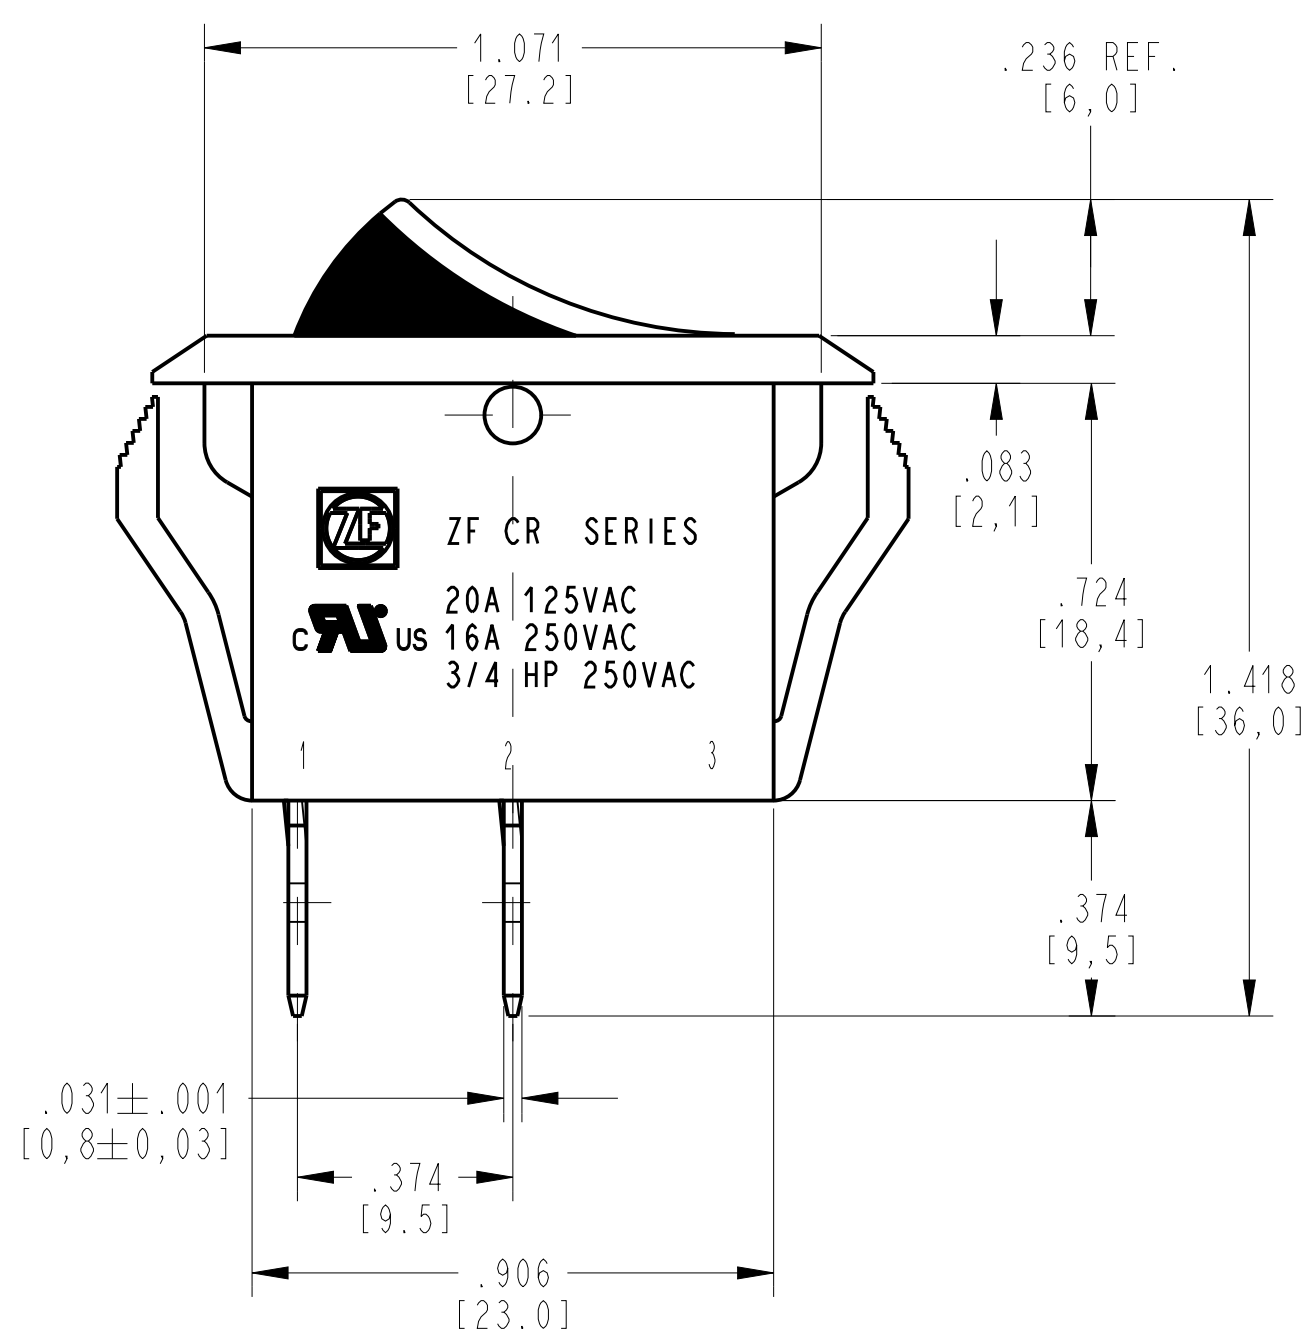


RECOMMENDED PANEL THICKNESS
.030 TO .049
[.75mm TO 1.125mm]

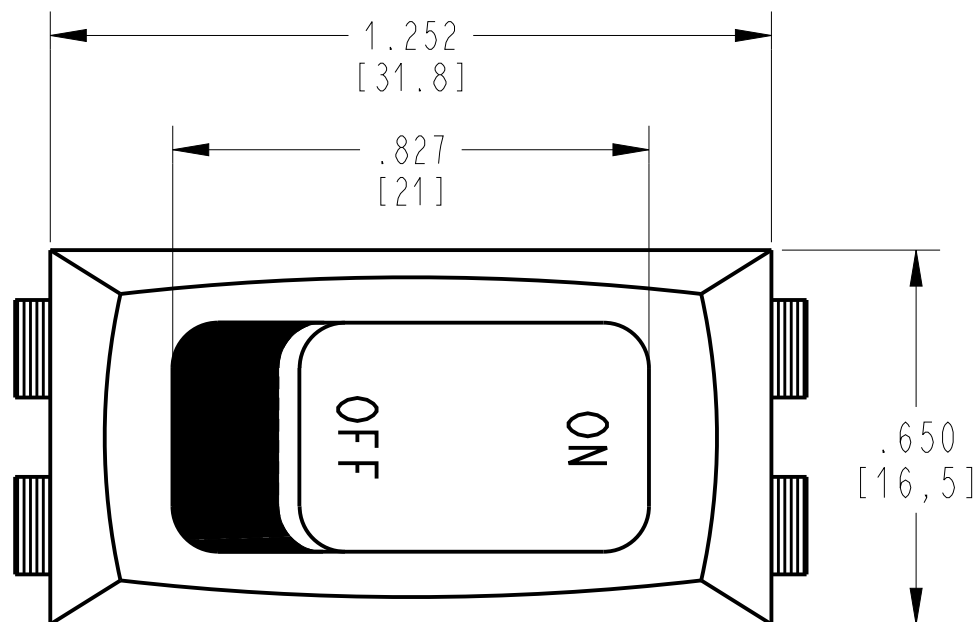

NOTES (UNLESS OTHERWISE SPECIFIED):

- RATINGS TO BE MARKED ON HOUSING
20A, 125VAC
16A, 250VAC
3/4 HP 250VAC
16(4)A 250V ~ T125/55 10E3
- DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
- INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
- INITIAL CONTACT RESISTANCE: 20m Ω MAX.
- DATE CODE FORMAT:
TWO DIGIT WEEK, ONE DIGIT YEAR AND MANUFACTURE LOCATION.
MANUFACTURE LOCATION REPRESENTED BY S - SHIJIE DONGGUAN, CHINA.
EXAMPLE: WEEK 14 YEAR 2013 = 143S.
- FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE
COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.

DWN: JPD		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION CR-SERIES-SINGLE THROW, QC, TWO COLOR, NON-LIGHTED				C		ITEM NO. CRE22F4DBBNE			
APVD: ELL						SCALE: N/A				SH 1 OF 1	
DATE: 08-Dec-17											
THIRD ANGLE PROJECTION											
		TOLERANCE UNLESS SPECIFIED									
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES						
N/A		INCHES	± 0.02	± 0.012	± 5.0 °						

A	Z000435616	08-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD