
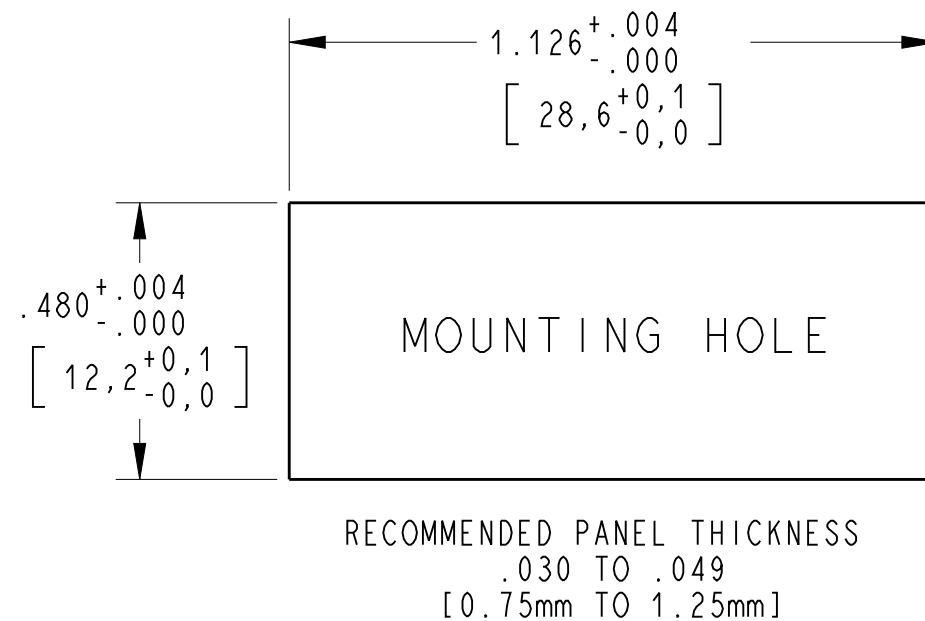




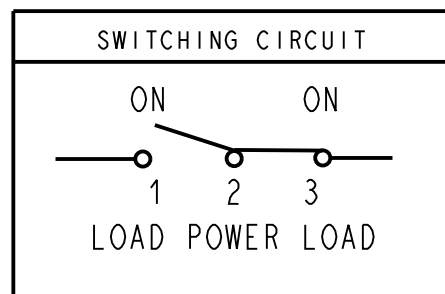


NOTES (UNLESS OTHERWISE SPECIFIED):

1. RATINGS TO BE MARKED ON HOUSING:
- UL** 20A, 125 VAC
16A, 250 VAC
3/4 HP 250 VAC


VE **10** 16(4)A 250V ~ T125/55

2. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500 VDC.
4. INITIAL CONTACT RESISTANCE: 20m Ω MAX.
5. ELECTRICAL LIFE: 10,000 CYCLES
6. ACTUATOR COLOR: BLACK
HOUSING COLOR: BLACK
7. TERMINALS (3): QUICK CONNECT,
.250 [6.3] WIDE x .031[0.8] THICK, HOLE DIAMETER .067 [1.7].
- 8.FOR NAMING AND MARKING SPECIFICATIONS SEE ES021255.
- 9.RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM OF
UNDERWITERS LABORATORIES, INC.

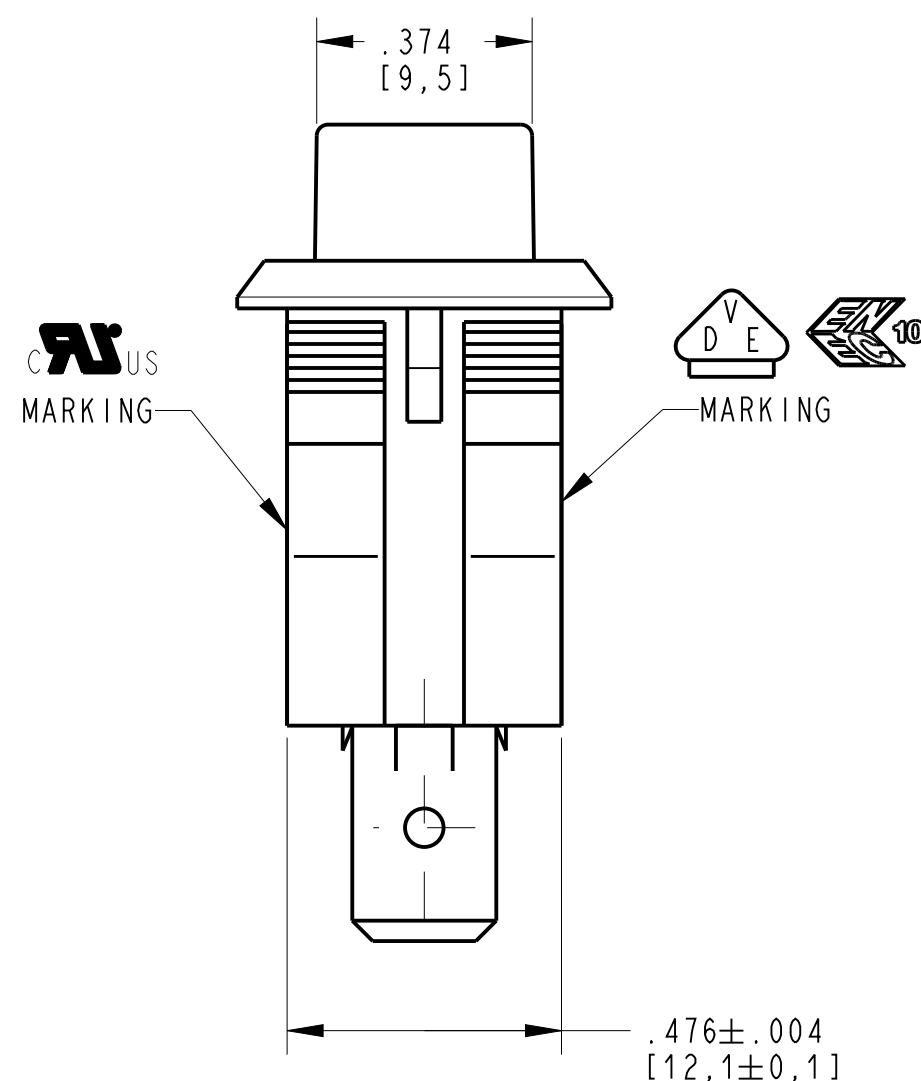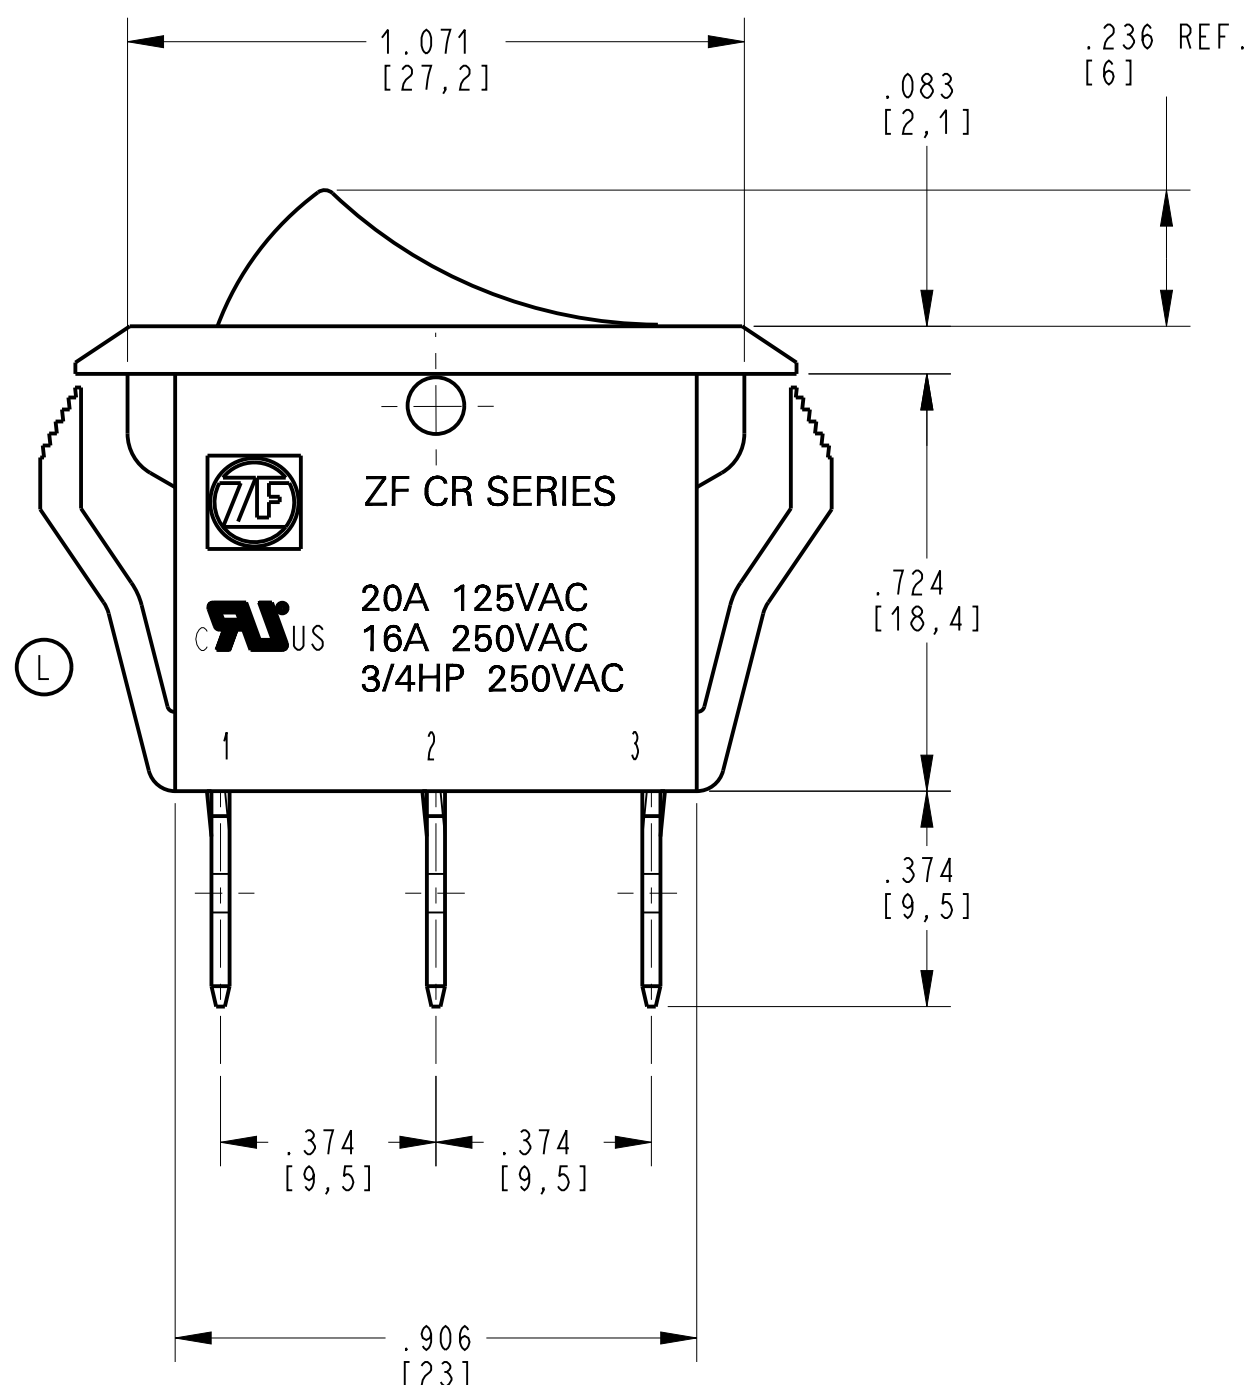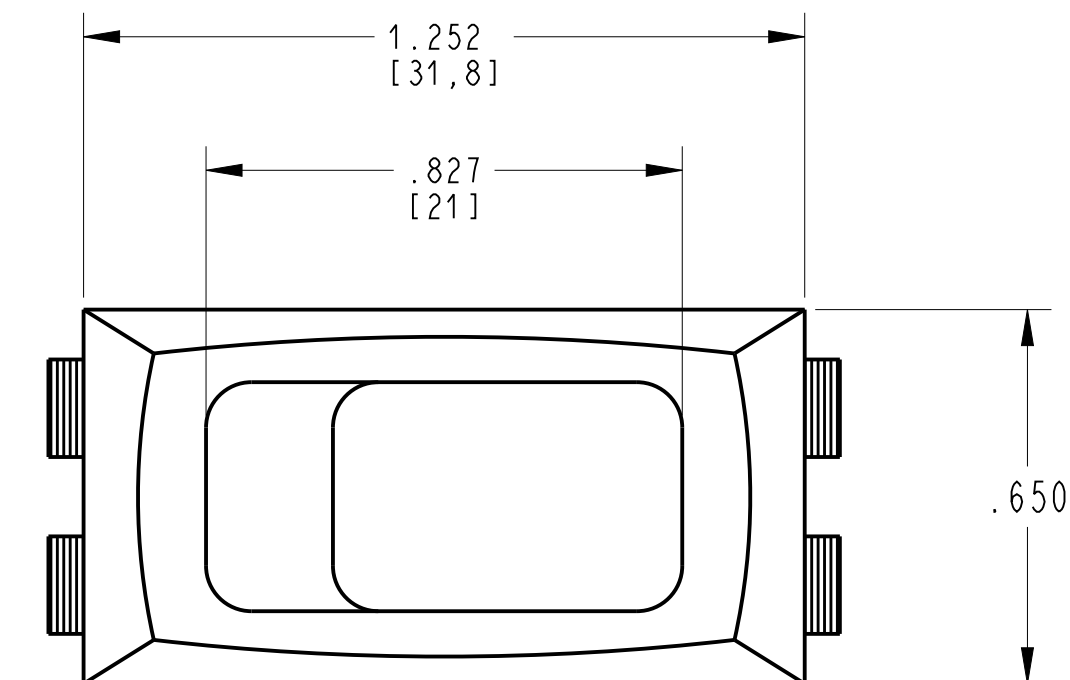

DWN: J. DOLNIK
APVD: E. LESLIE
DATE: 20-Jan-09

THIRD ANGLE PROJECTION



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPEC DRAWING

C ITEM NO. CRE23F2BBBNE

SCALE: 3:1 SH 1 OF 1

L	Z000389777	12-Dec-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
PROJECT/ CSR	DWG UNITS	X.XX/[X.X]	X.XXX/[X.XX]
4000000138	INCH./[MM.]	$\pm$ 0.02[0.5]	$\pm$ 0.012[0.3]

ANGLES	$\pm$ 5.0°
--------	------------