


DETAIL A
SCALE 2:1



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. RATING TO BE MARKED ON HOUSING
16A, 125VAC
10A, 250VAC
UL ENDURANCE RATING: 6000 CYCLES
2. INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
3. INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
4. DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
5. OPERATION TEMPERATURE: -25°C TO +85°C
6. WATERPROOF: IP65 CAPABLE
7. ACTUATOR: RED CLEAR PC (94-V2)
8. LIGHTED: DEPENDENT; NEON BULB RATED AT 220VAC.
9. TERMINALS: .031 $\pm$.001[0,8 $\pm$ 0,03] X .189 $\pm$.004[4,8 $\pm$ 0,11]
HOLE $\varnothing$.055 $\pm$.008[1,4 $\pm$ 0,2]
10. WATERPROOF RUBBER: BLACK SILICONE.
11. HOUSING: BLACK, NYLON 66 (94-V2)
12. ACTUATOR: RED CLEAR PC (94-V2)

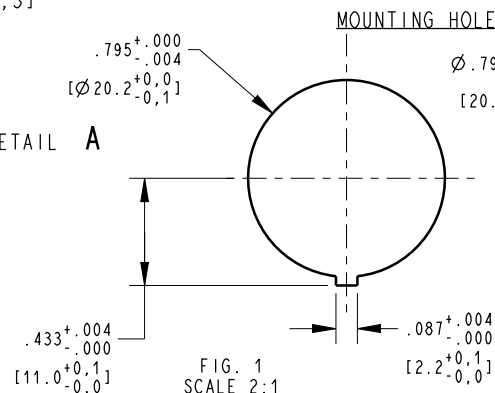

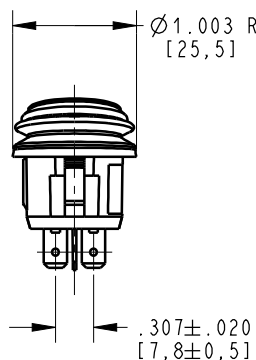
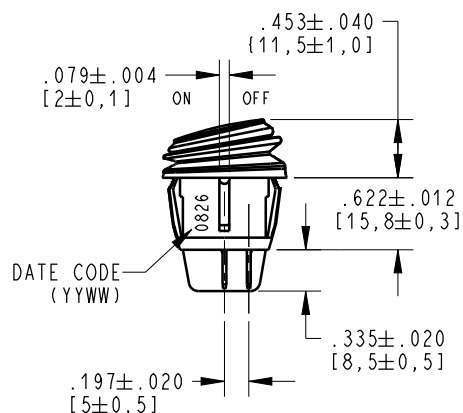


FIG. 1
SCALE 2:1


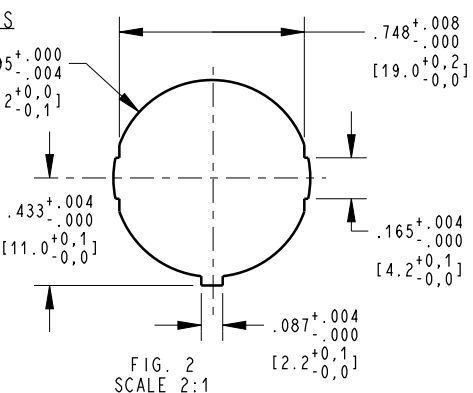


FIG. 2
SCALE 2:1




MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

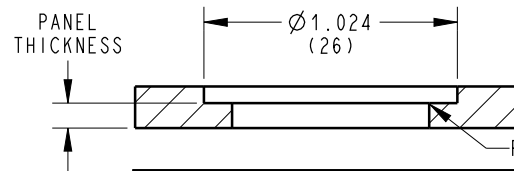

SCALE 3:2

D	Z000431981	15-Nov-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: R. YAÑEZ
APVD: E. LESLIE
DATE: 07-Mar-14
THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0°

ZF Electronic Systems	
PLEASANT PRAIRIE, WISCONSIN U.S.A.	
NAME / DESCRIPTION	
KD-DPST ON-OFF LIGHTED	
B	ITEM NO. KDH3AEA2RBB
SCALE:	1:1 SH 1 OF 1