







SCALE 3:1

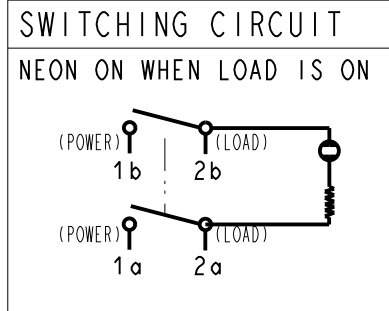

NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: TO BE MARKED ON HOUSING:  
16A, 125VAC  
10A, 250VAC

UL ENDURANCE RATING: 6000 CYCLES  
INITIAL CONTACT RESISTANCE: 50m  $\Omega$  (MAX)  
INSULATION RESISTANCE: 500 VDC 100M  $\Omega$  (MIN)  
DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.  
OPERATION TEMPERATURE: -25°C TO +85°C  
WATERPROOF: IP65 CAPABLE  
ACTUATOR: RED CLEAR PC (94-V2)  
LIGHTED: DEPENDENT; NEON BULB RATED AT 110VAC.  
TERMINALS: .031 $\pm$ .001[0,8 $\pm$ 0,03] X .189 $\pm$ .004[4,8 $\pm$ 0,1]  
HOLE  $\varnothing$ .055 $\pm$ .008[1,4 $\pm$ 0,2]  
WATERPROOF RUBBER: BLACK SILICONE.  
HOUSING: BLACK, NYLON 66 (94-V2).

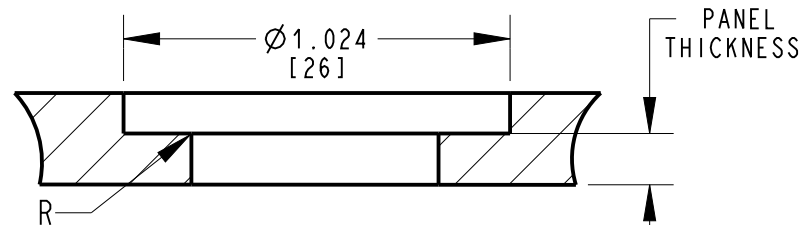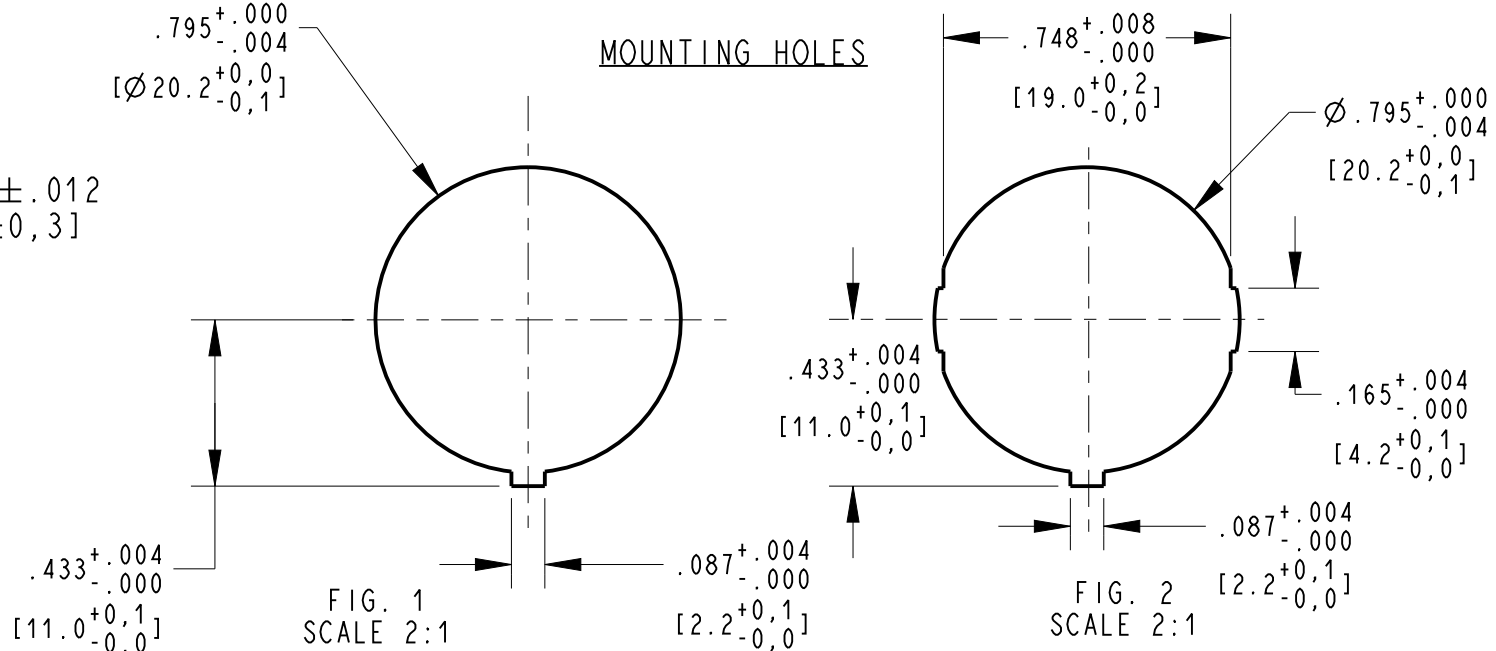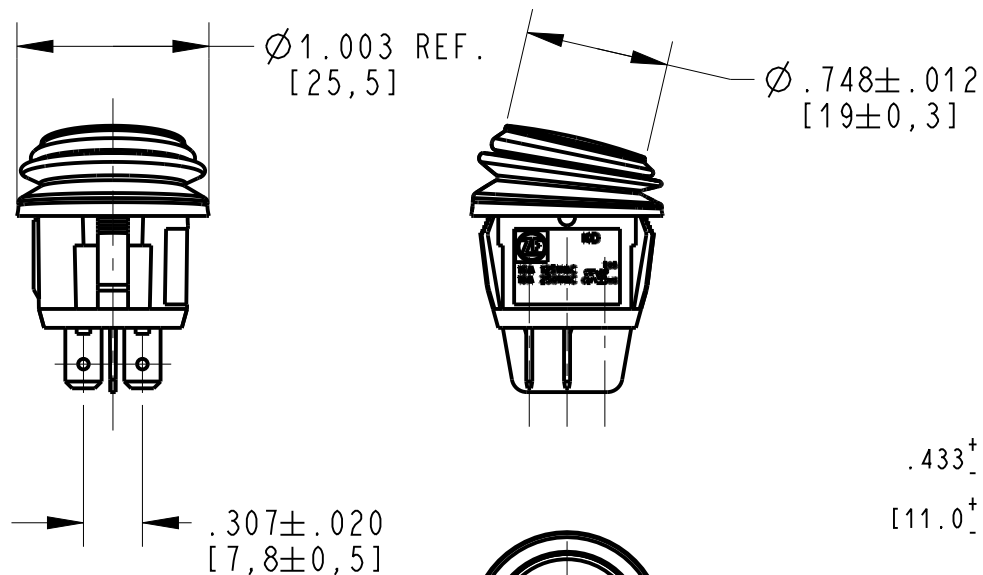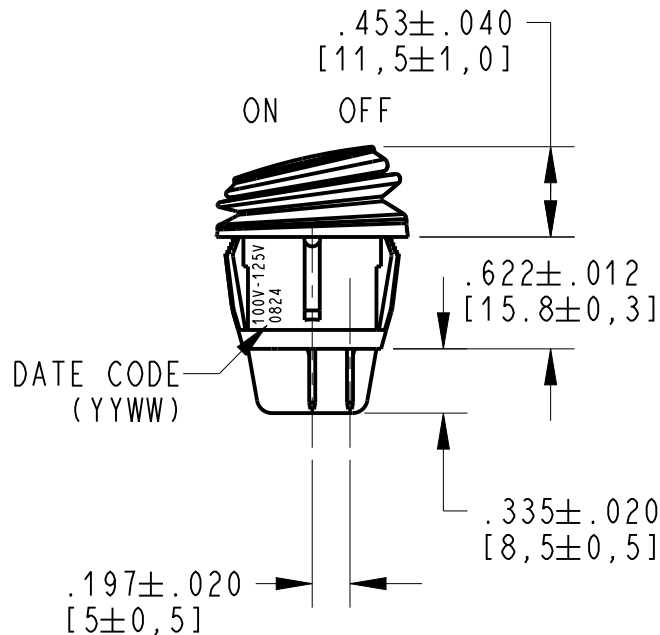


| MOUNTING HOLES |                              |
|----------------|------------------------------|
| FIG.           | PANEL THICKNESS              |
| 1              | .059 TO .098<br>[1.5 TO 2.5] |
| 2              | .028 TO .098<br>[0.7 TO 2.5] |



SCALE 3:2

DWN: C. RAMOS  
APVD: J. RUMMELHART  
DATE: 17-Jun-08

THIRD ANGLE PROJECTION



PROJECT/ CSR  
N/A

| TOLERANCE UNLESS SPECIFIED |            |             |             |
|----------------------------|------------|-------------|-------------|
| DWG UNITS                  | X.XX       | X.XXX       | ANGLES      |
| INCHES                     | $\pm$ 0.02 | $\pm$ 0.012 | $\pm$ 5.0 ° |



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KD-DPST ON-OFF LIGHTED

B ITEM NO. KDH3ALA2RBB

SCALE: 1:1 SH 1 OF 1

|     |            |           |      |      |
|-----|------------|-----------|------|------|
| G   | Z000431981 | 15-Nov-17 | JPD  | ELL  |
| REV | ECO NO.    | DATE      | PREP | APVD |