








NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: TO BE MARKED ON HOUSING.
16A, 125VAC 
10A, 250VAC 
UL ENDURANCE RATING: 6000 CYCLES



INITIAL CONTACT RESISTANCE: 50m Ω (MAX)
INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)
DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.
OPERATION TEMPERATURE: -25°C TO +85°C
WATERPROOF: IP65 CAPABLE.
ACTUATOR: BLACK PC (94-V2)
TERMINALS: .031±.001[0,8±.03] X .189±.004[4,8±0,1]
HOLE Ø.055±.008[1,4±0,2]
WATERPROOF RUBBER: BLACK SILICONE.
HOUSING: BLACK, NYLON 66 (94-V2).

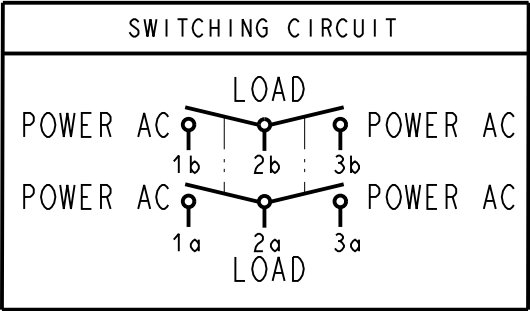


DETAIL A
SCALE 3:1

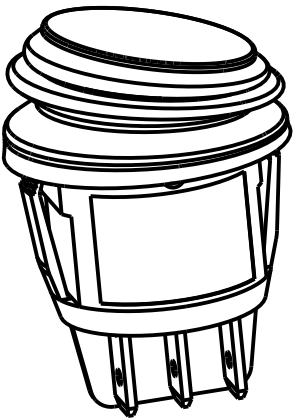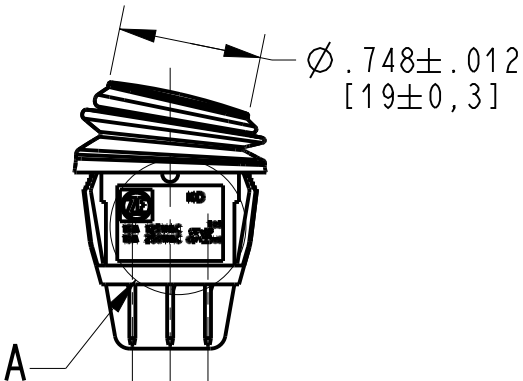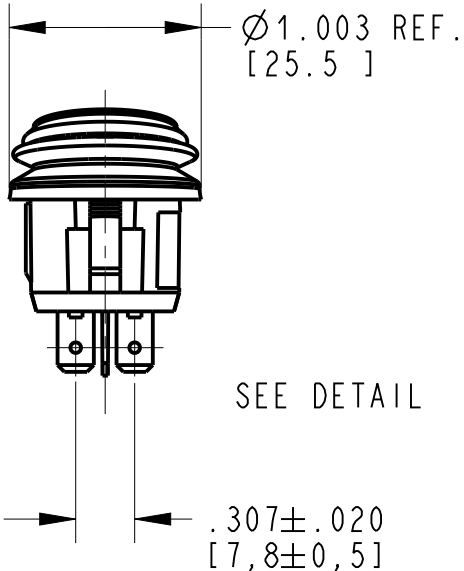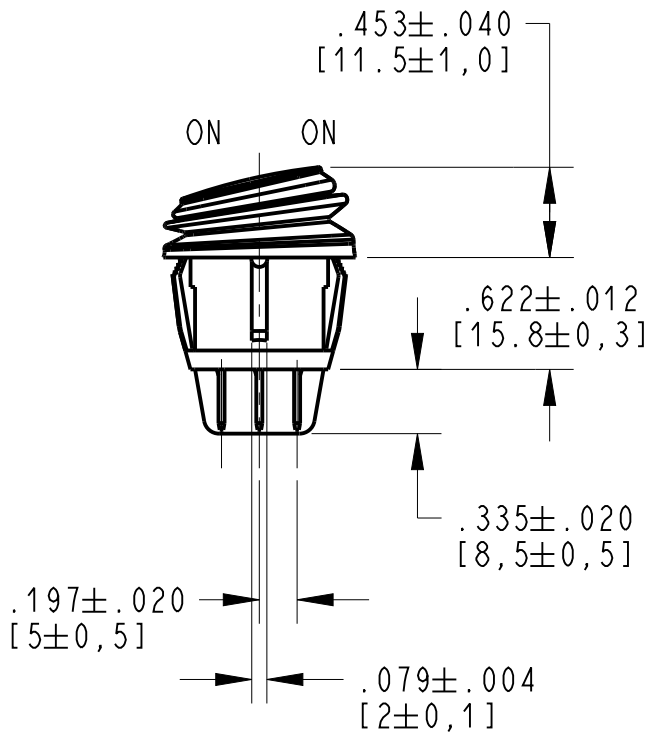


SCALE 3:2

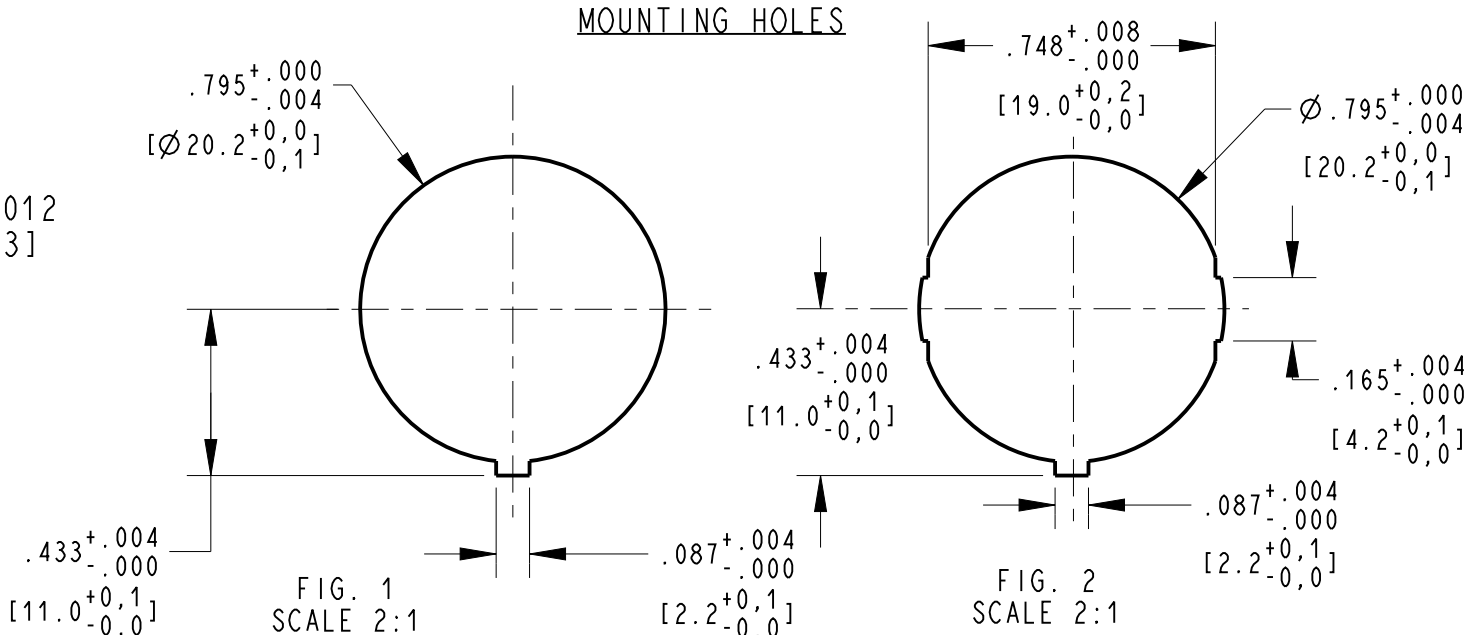

MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

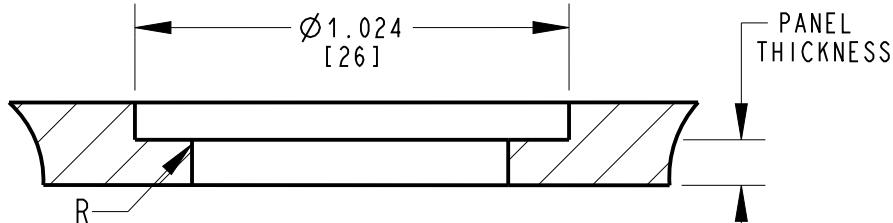

DWN: C RAMOS
APVD: J RUMMELHART
DATE: 17-Jun-08



PROJECT/ CSR
N/A

G	Z000432191	14-Nov-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KDH DPDT ON-ON NON-LIGHTED

B ITEM NO. KDH3BNA1BBB

SCALE: 1:1 SH 1 OF 1

ORIGINAL ON PRO/E