


DETAIL A
SCALE 3:1

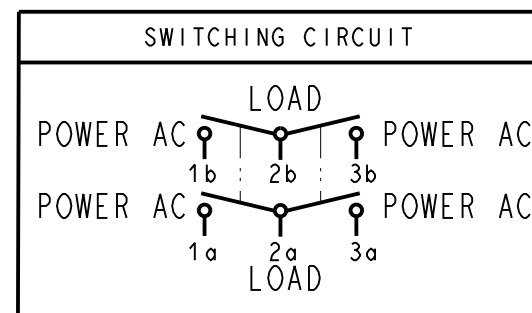

NOTES: (UNLESS OTHERWISE SPECIFIED)

RATING: TO BE MARKED ON HOUSING

16A, 125VAC

10A, 250VAC

UL ENDURANCE RATING: 6000 CYCLES

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

INSULATION RESISTANCE: 500 VDC 100M Ω (MIN)

DIELECTRIC STRENGTH: 1500 VAC FOR 1 MINUTE.

OPERATION TEMPERATURE: -25°C TO +85°C

WATERPROOF: IP65 CAPABLE




ACTUATOR: BLACK, PC (94-V2)

TERMINALS: .031 $\pm$.001[0,8 $\pm$ 0,03] X .189 $\pm$.004[4,8 $\pm$ 0,1]




HOLE $\varnothing$.055 $\pm$.008[1,4 $\pm$ 0,2]

HOUSING: BLACK, NYLON 66 (94-V2).

WATERPROOF RUBBER: BLACK, SILICONE.

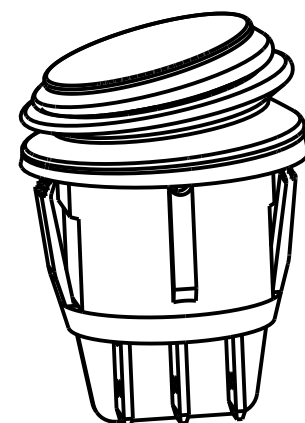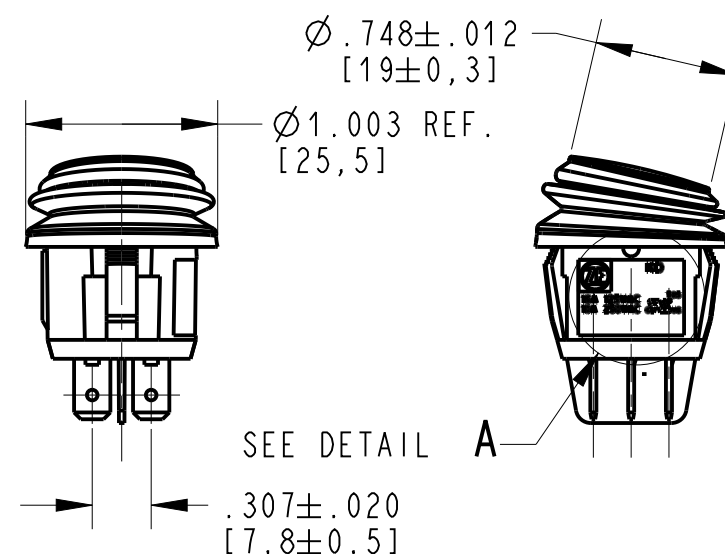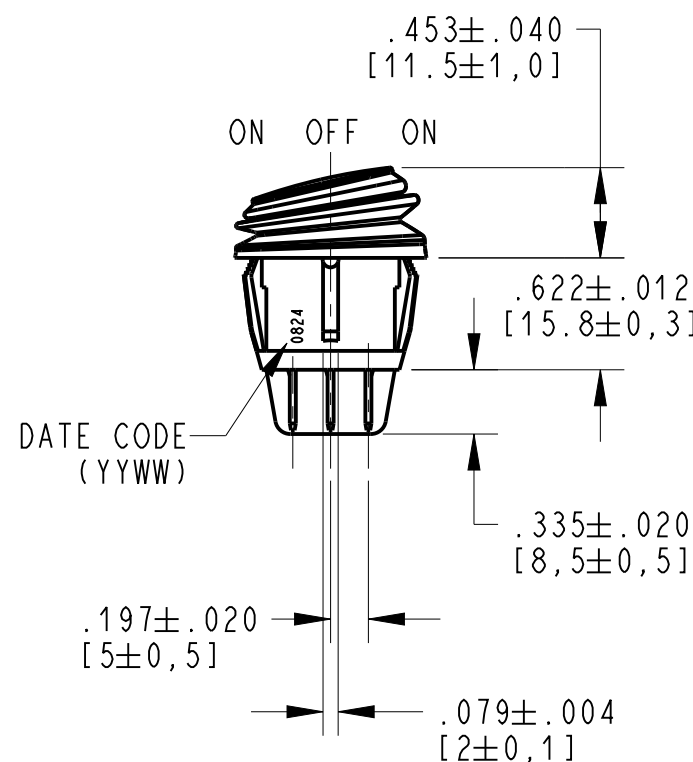

SCALE 3:2

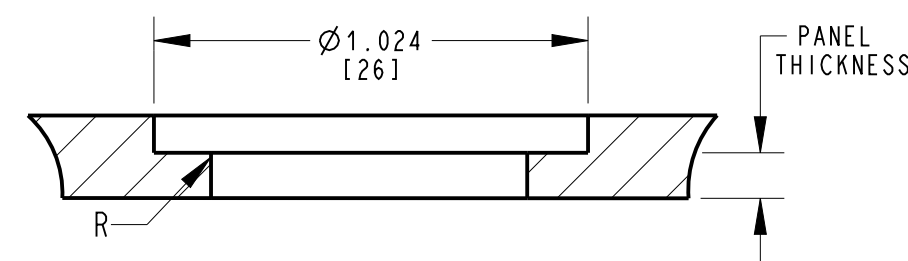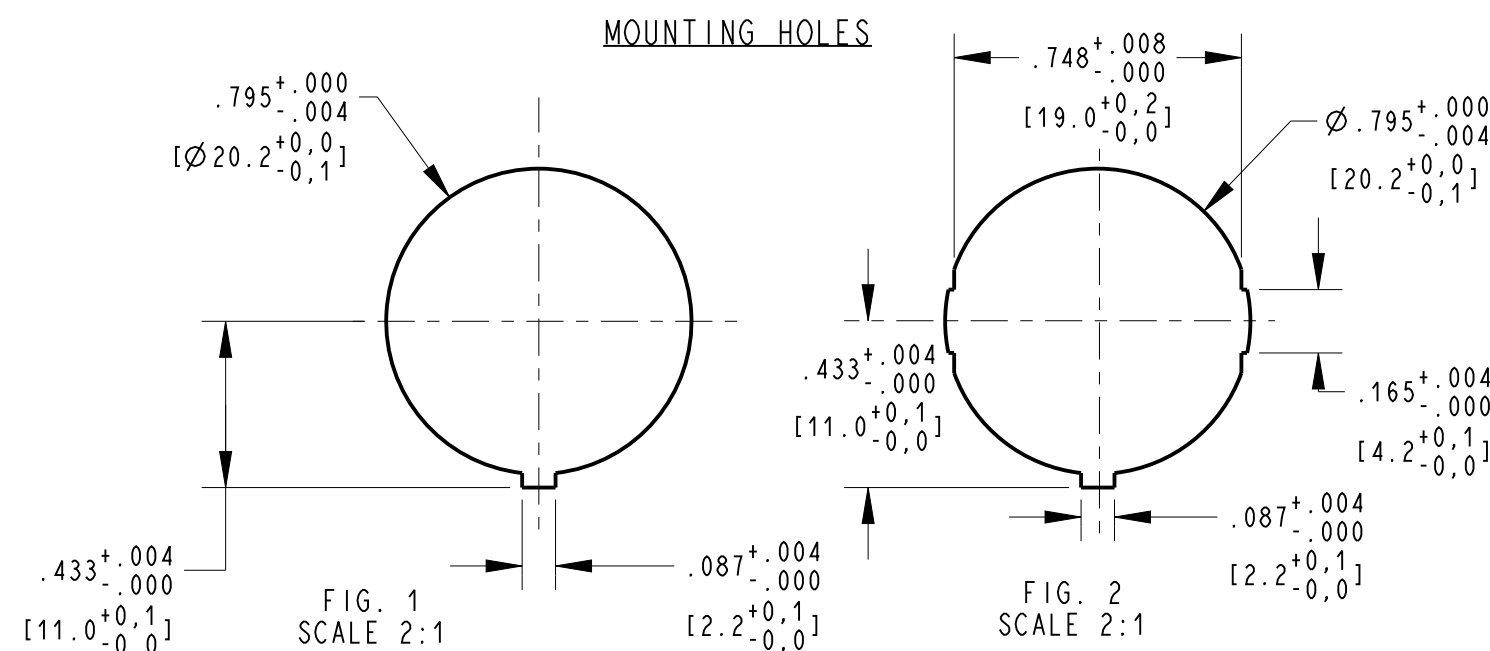


MOUNTING HOLES	
FIG.	PANEL THICKNESS
1	.059 TO .098 [1.5 TO 2.5]
2	.028 TO .098 [0.7 TO 2.5]

DWN: C RAMOS

APVD: J RUMMELHART

DATE: 17-Jun-08

THIRD ANGLE PROJECTION



PROJECT/ CSR

N/A

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KD-DPDT ON-OFF-ON NON-LIGHTED

ITEM NO. KDH3CNA1BBB

SCALE: 1:1 SH 1 OF 1

G	Z000432191	14-Nov-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD