
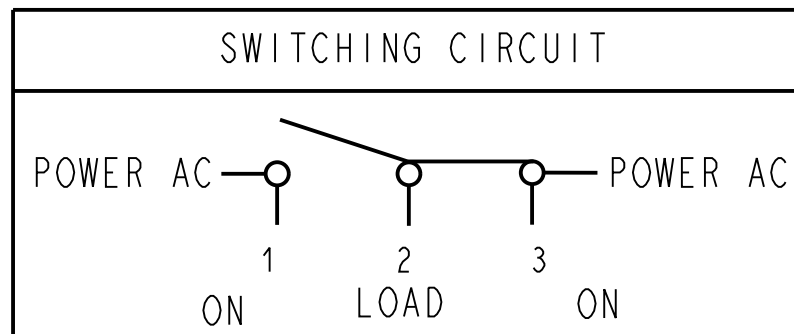


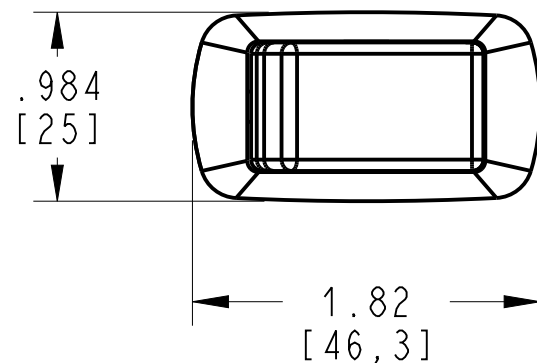

RATING: 20A 125VAC, 10A 250 VAC 

(E) UL ENDURANCE RATING: 6000 CYCLES

INITIAL CONTACT RESISTANCE: 50m Ω (MAX)

(E) INSULATION RESISTANCE: 500VDC 100 M Ω (MIN)

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56 CAPABLE

RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS
UNDER THE COMPONENT RECOGNITION PROGRAM
OF UNDERWRITERS LABORATORIES, INC. (AC ONLY)


DATE CODE FORMAT: YYWW

.406 $\pm$.039 REF.
[10.3 $\pm$ 1]

1.106
[28,1]

.669
[17]

.087 $\pm$.008
[2,2 $\pm$ 0,2]

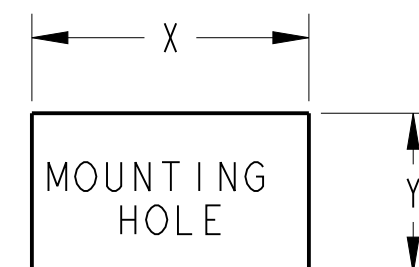

Z = PANEL THICKNESS

SEE DETAIL A

ϕ .087
[2,2]

.250 $\pm$.004
[6,35 $\pm$ 0,1]

.441 $\pm$.039
[11,2 $\pm$ 1]

.827 $^{+0.000}_{-.008}$
[21 $^{+0.0}_{-0.2}$]

1.437 $^{+0.000}_{-.008}$
[36,5 $^{+0,0}_{-0,2}$]

(E)



DETAIL A
SCALE 2:1


DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0.75 to 1.25]	1.441 $\pm$.008/- .000 [36.6 $\pm$ 0.2/-0.0]	.835 $\pm$.004/- .000 [21.2 $\pm$ 0.1/-0.0]
.049 TO .079 [1.25 to 2.00]	1.449 $\pm$.008/- .000 [36.8 $\pm$ 0.2/-0.0]	.835 $\pm$.004/- .000 [21.2 $\pm$ 0.1/-0.0]
.079 TO .118 [2.00 to 3.00]	1.457 $\pm$.008/- .000 [37.0 $\pm$ 0.2/-0.0]	.835 $\pm$.004/- .000 [21.2 $\pm$ 0.1/-0.0]

DWN: J DOLNIK

APVD: JR

DATE: 04-JUN-08

THIRD ANGLE PROJECTION



PROJECT/ CSR

4000000138



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

KG-SPDT ON-ON NON-LIGHTED

B ITEM NO. KGC2BNB1BBB

SCALE: 1:1 SH 1 OF 1

E	Z000374406	19-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	$\pm$ 0.02	$\pm$ 0.012	$\pm$ 5 °

ORIGINAL ON PRO/E