

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ELECTRICAL CHARACTERISTICS:

RATING TO BE MARKED ON HOUSING:



10A 125 VAC
8A 250 VAC
1/4 HP 125/250 VAC




10(4)A 250V~T125/55








12(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1000 VAC FOR 1 MINUTE
INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC
INITIAL CONTACT RESISTANCE: 20mΩ MAX.
ELECTRICAL LIFE: 10,000 CYCLES

2. TERMINAL (2): SOLDER TAG .187 [4.7] WIDE X .031 [0.8] THK
HOLE DIAMETER .091 [2.3].




SCALE 1:1

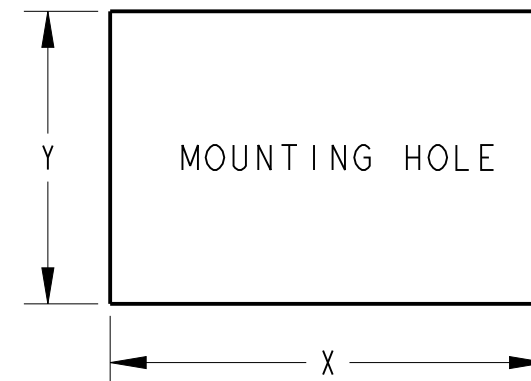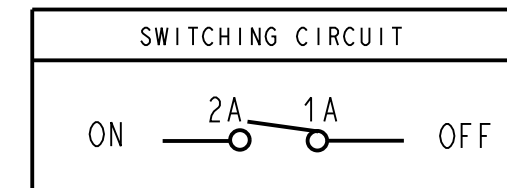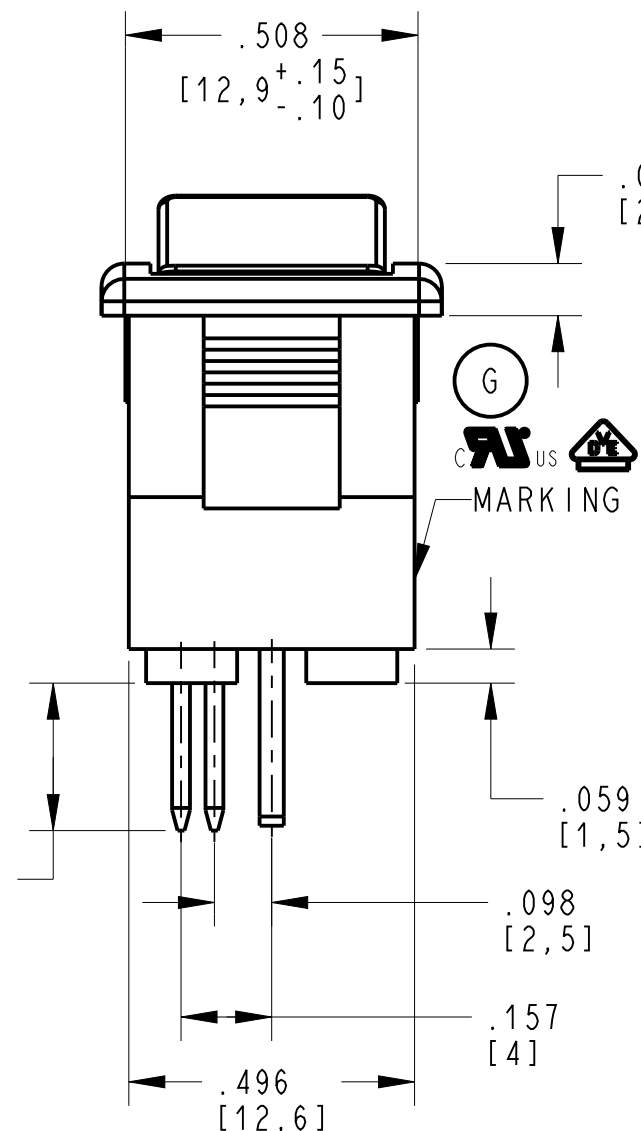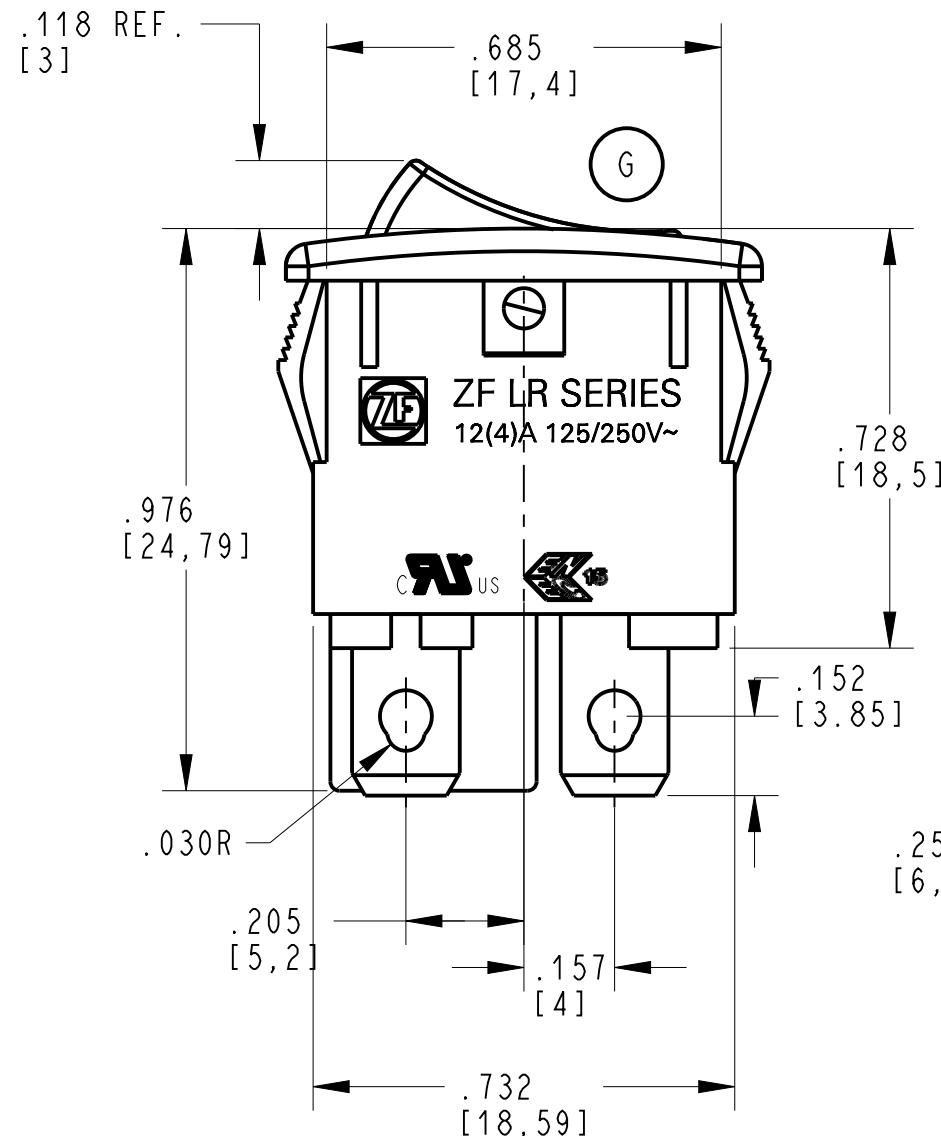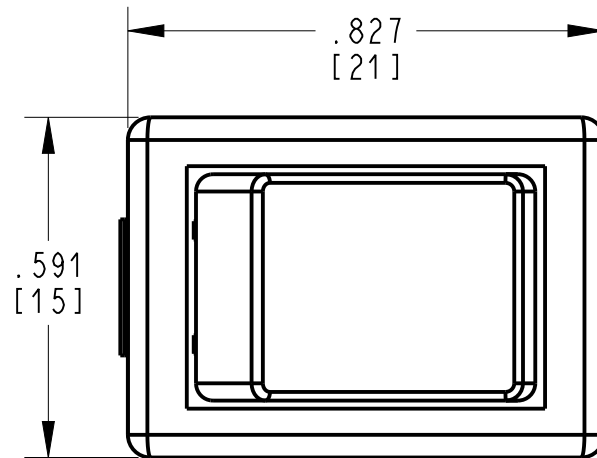

PANEL THICKNESS	DIM. X	DIM. Y
.030 TO .049 (0.75 TO 1.25)	.756 ^{+.004} _{-.000} (19.2 ^{+0.1} ₋₀)	.508 ^{+.006} _{-.000} (12.9 ^{+0.15} ₋₀)
.049 TO .079 (1.25 TO 2)	.764 ^{+.004} _{-.000} (19.4 ^{+0.1} ₋₀)	
.079 TO .118 (2 TO 3)	.780 ^{+.004} _{-.000} (19.8 ^{+0.1} ₋₀)	

DWN: TLM
APVD: CY
DATE: 2015-10-28

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA22H2BBBNN

SCALE: 3:1 SH 1 OF 1

G	Z000391407	09-Jan-17	GP	EL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX[X.X]	X.XXX[X.XX]	ANGLES
INCH [MM.]	± 0.02[0.5]	± 0.012[0.3]	± 5.0°