

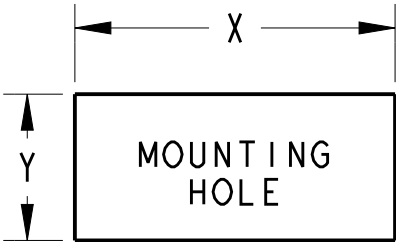
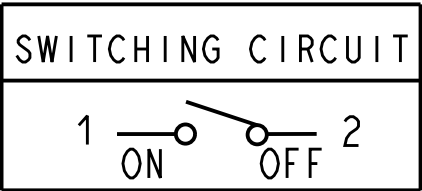


RECOMMENDED PANEL CUTOUT DIMENSIONS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 (0.75 TO 1.25)	.535 ^{+0.00} _{-.004} (13.6 ^{+0.00} _{-.10})	.362±.004 (9.2±0.10)
.049 TO .079 (1.25 TO 2.00)	.539 ^{+0.00} _{-.004} (13.7 ^{+0.00} _{-.10})	.362±.004 (9.2±0.10)
.079 TO .098 (2.00 TO 2.50)	.543 ^{+0.00} _{-.004} (13.8 ^{+0.00} _{-.10})	.362±.004 (9.2±0.10)

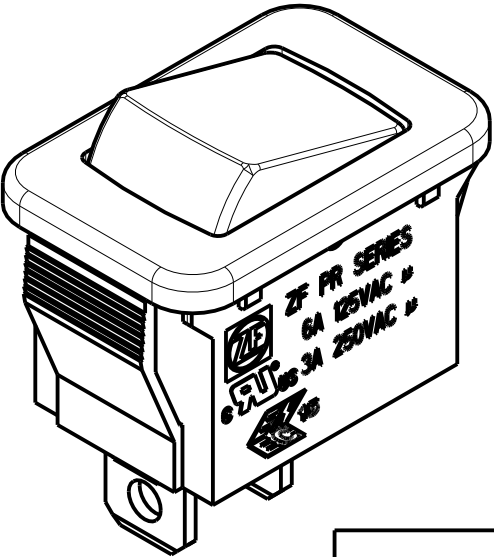



Z = PANEL THICKNESS

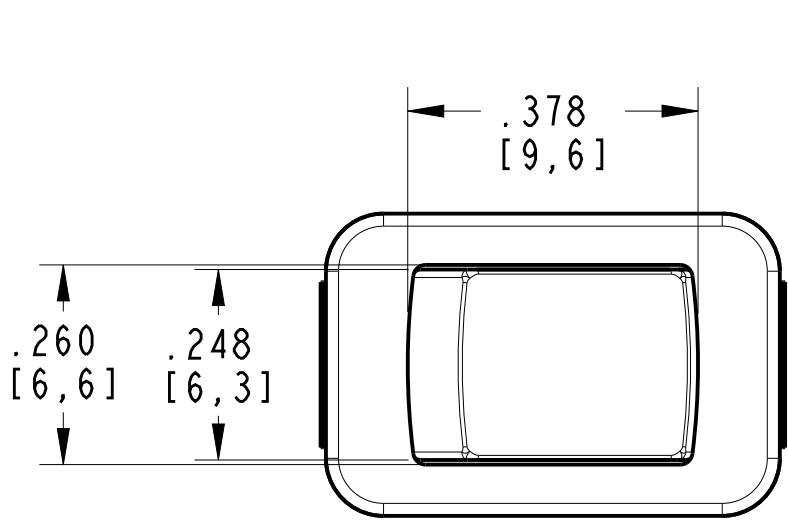

NOTES (UNLESS OTHERWISE SPECIFIED):

1. DIELECTRIC STRENGTH: 1000 VAC FOR 1 MINUTE.
2. INSULATION RESISTANCE: 100 MΩ MIN AT 500VDC
3. INITIAL CONTACT RESISTANCE: 20 uΩ MAX.
4. ELECTRICAL RATING:
6A 125VAC μ, 3A 250VAC μ
 3A 250V~μT100/55 10E3
5. TERMINAL TYPE SOLDER TAG
.146 (3.7±.1mm) WIDE X .020 (0.5mm) THICK
HOLE DIAMETER .059 (1.5mm)
6. HOUSING AND ACTUATOR ARE COLOR BLACK.
7. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
8. DIMENSION ARE IN DUAL INCHES [MM]


MARKINGS

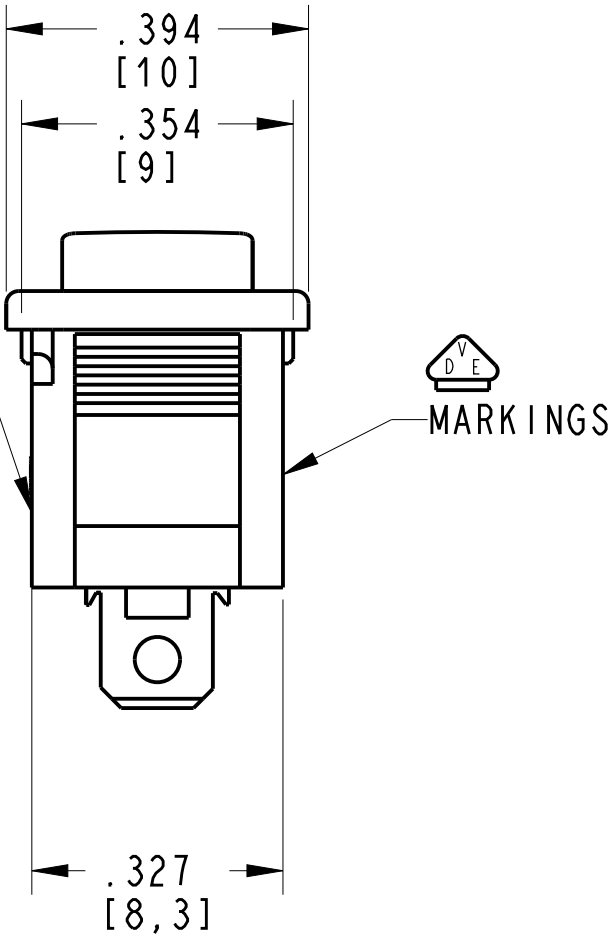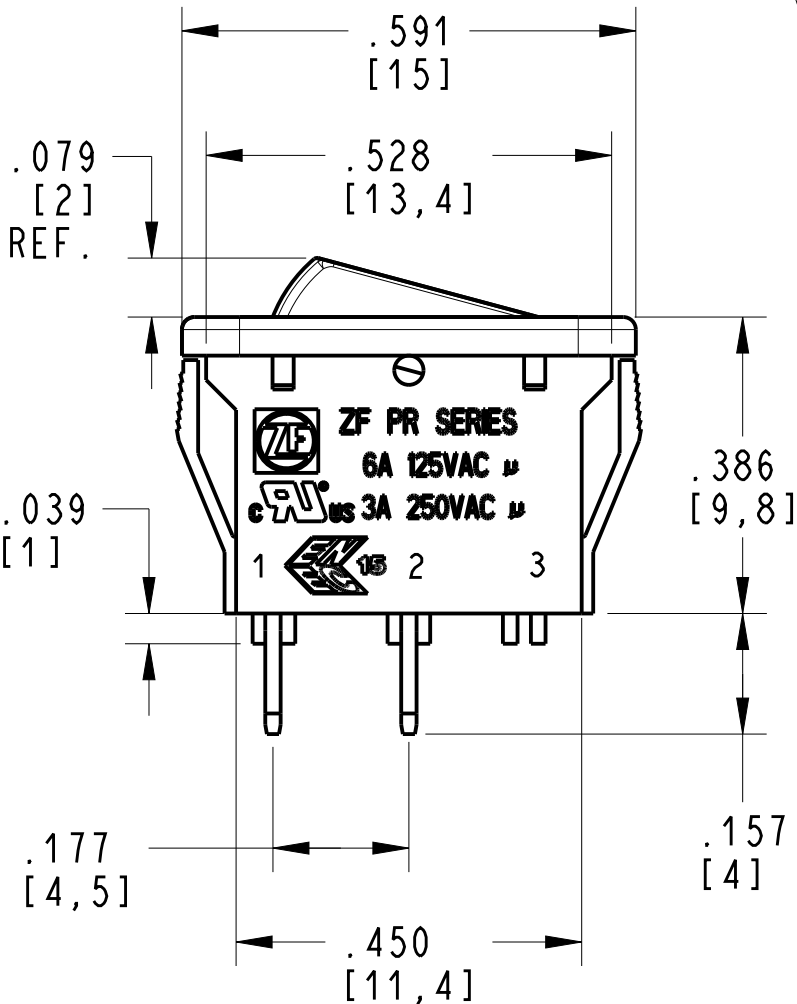

MARKINGS

DWN: C. MORALES
APVD: E. LESLIE
DATE: 20-Jan-11

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

F	Z000389790	18-Dec-16	GP	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158
NAME / DESCRIPTION

PRK SERIES

B ITEM NO. PRK22J5BBBNN

SCALE: 4.000 SH 1 OF 1