


8 7 6 5 4 3 2 1

NOTES (UNLESS OTHERWISE SPECIFIED):


- 1. RATING TO BE MARKED ON HOUSING: 10A 125 VAC
10A 125VAC
6A 250VAC
10(4)A 250V~ T125/55
10(4)A 125/250V~ T55
- 2. DIELECTRIC STRENGTH: 1,000 VAC FOR 1 MINUTE
- 3. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 VDC
- 4. INITIAL CONTACT RESISTANCE: 20 mΩ MAX.
- 5. ELECTRICAL LIFE: 50,000 CYCLES
- 6. ACTUATOR COLOR: BLACK
- 7. TERMINALS: .185+.004/- .002[4,7+0,1/-0,05] WIDE X .031±.001[0,8±0,03] THICK, HOLE DIAMETER .063 [1.6].
- 8. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWITERS LABORATORIES, INC.

LOGO LOCATION

MARKING

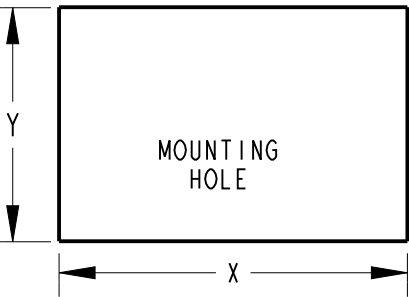

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756+.004/- .000 [19,2+0,1/-0,0]	.508+.006/- .000 [12,90+0,15/-0,0]
.049 TO .079 [1,25 TO 2,0]	.764+.004/- .000 [19,4+0,1/-0,0]	.508+.006/- .000 [12,90+0,15/-0,0]
.079 TO .118 [2,0 TO 3,0]	.780+.004/- .000 [19,8+0,1/-0,0]	.508+.006/- .000 [12,90+0,15/-0,0]

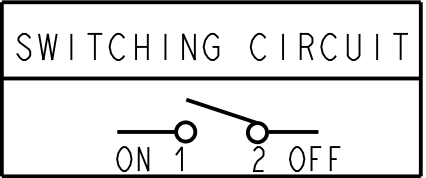

J	Z000435630	07-Dec-17	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

DWN: TLM

APVD: SG

DATE: 28-Apr-06

THIRD ANGLE PROJECTION

PROJECT/ CSR

N/A

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °

ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SR ROCKER

ITEM NO. SRB22A2FBBNN

SCALE: 3:1 SH 1 OF 1

8 7 6 5 4 3 2 1

F
E
D
C
B
A
ORIGINAL ON PRO/E