


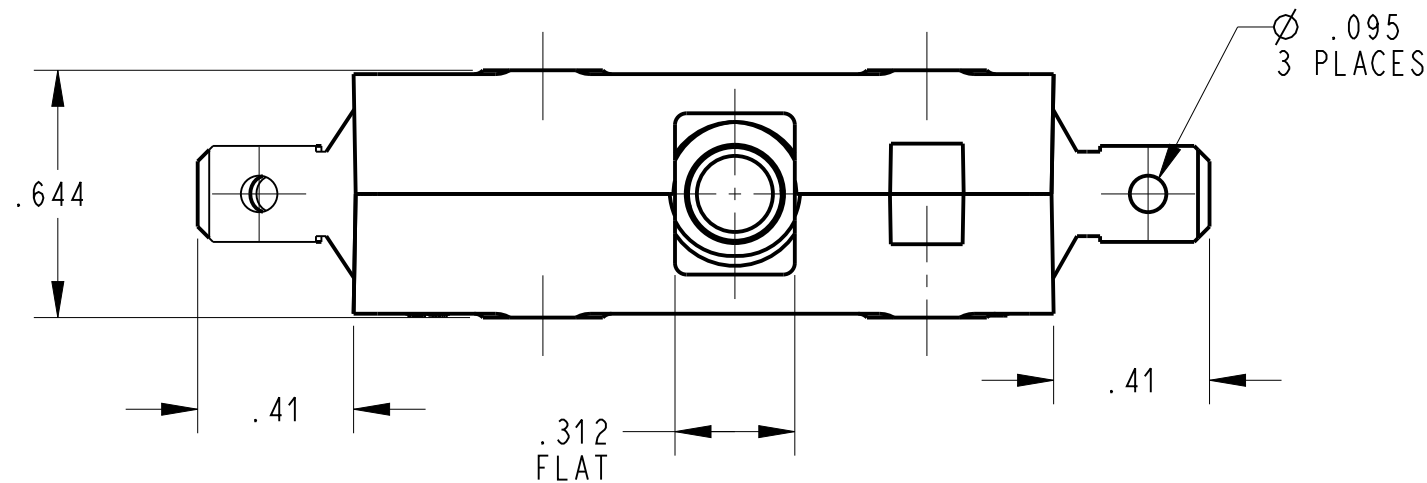

NOTES (UNLESS OTHERWISE SPECIFIED):

1. *SWITCH CHARACTERISTICS

REST POSITION	.750 MAX.
PRE-TRAVEL	.050 MAX.
OPERATING POSITION	.640 TO .700
OVER TRAVEL	.108 MIN.
MOVEMENT DIFF.	.015 MAX.
OPERATING FORCE grams	425 MAX.
RELEASE FORCE grams	85 MIN..

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.



2. **UL** ELECTRICAL RATING

15 AMPS 125/250 VAC
3/4 H.P 125 VAC
1 1/2 H.P. 250 VAC
2A, 48VDC

3. TERMINALS COMMON, N.O. & N.C. ARE .250 WIDTH x .032 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.


5. TEMPERATURE RATING -40°C TO +105°C

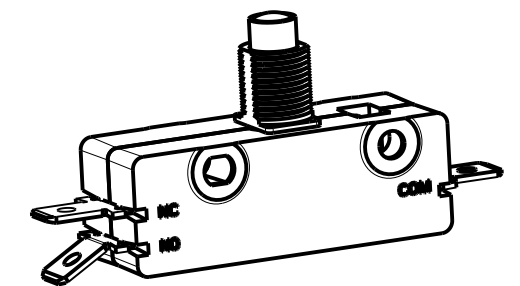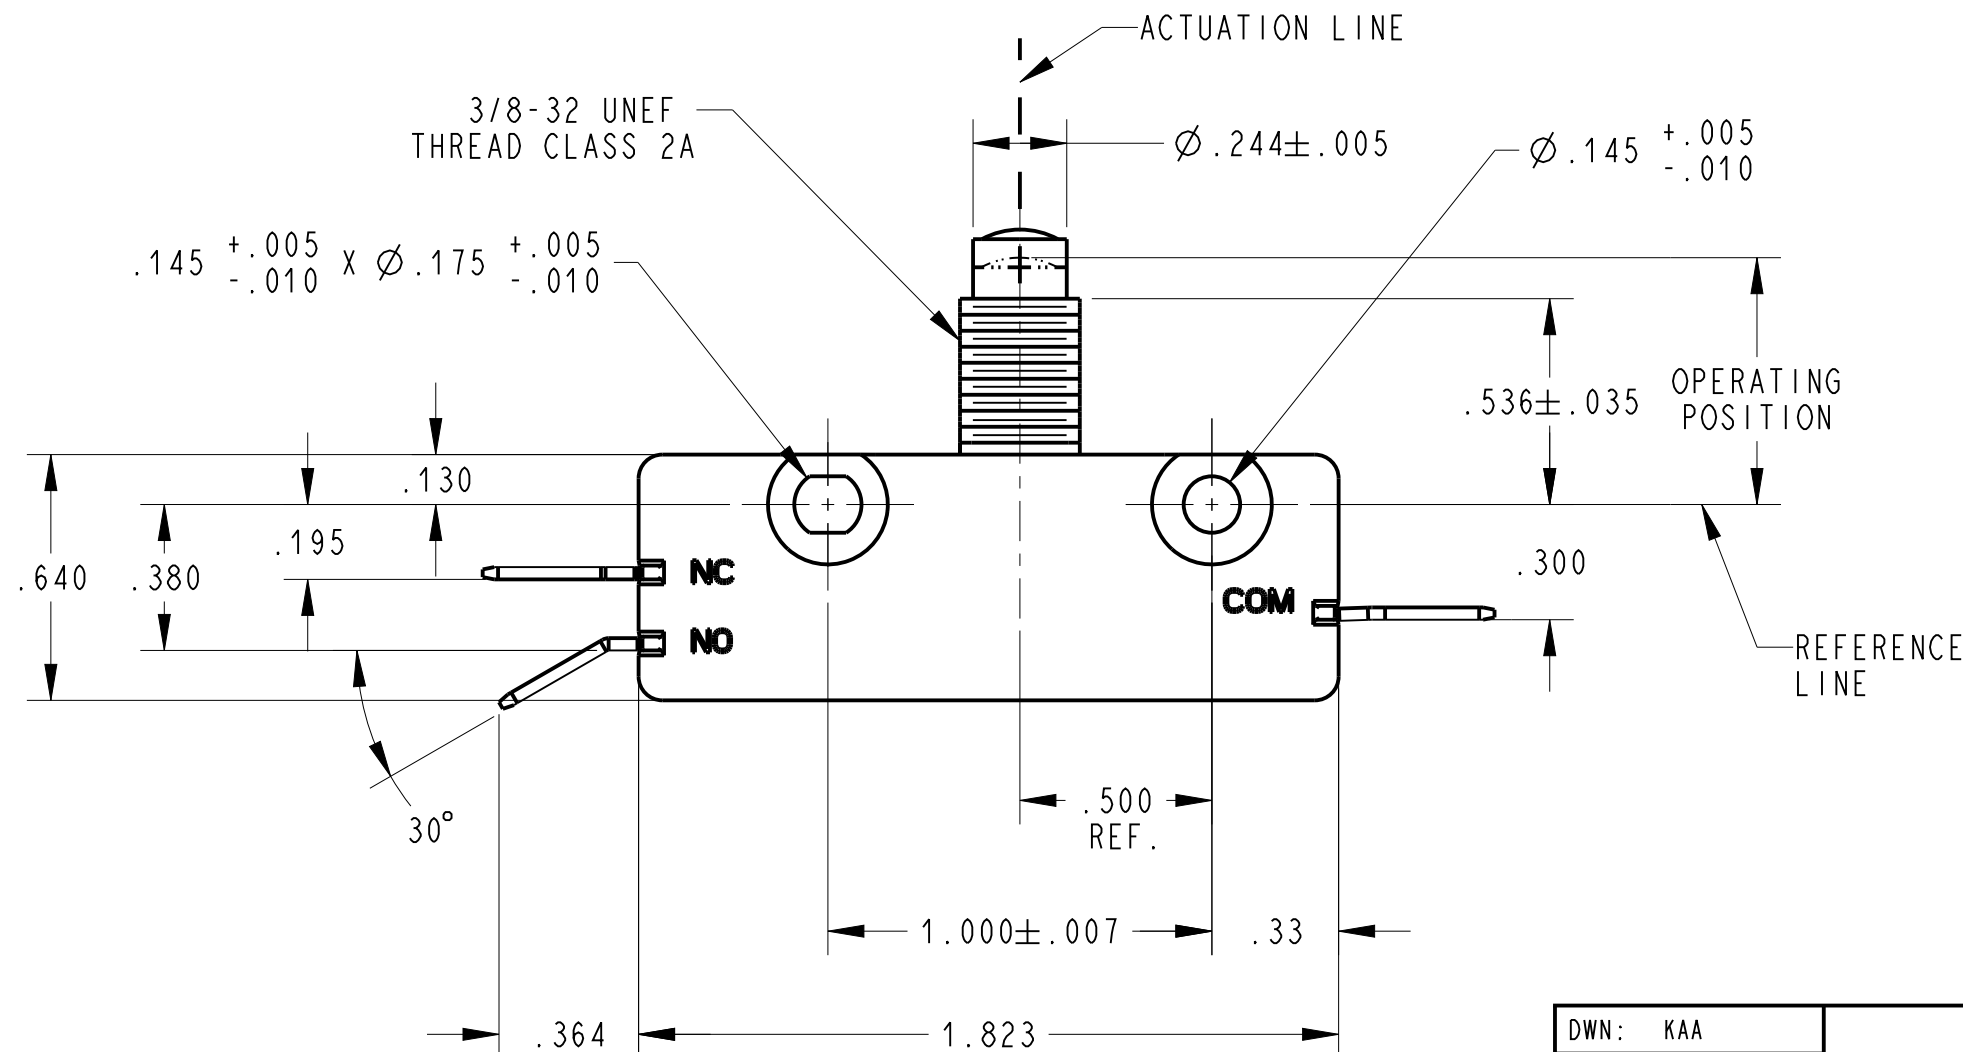

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: KAA
APVD: CJD
DATE: 25-May-06

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

F	Z000370093	30-Jun-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5.0 °



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. 0E13-00J0

SCALE: 2:1 SH 1 OF 1

ORIGINAL ON PRO/E