
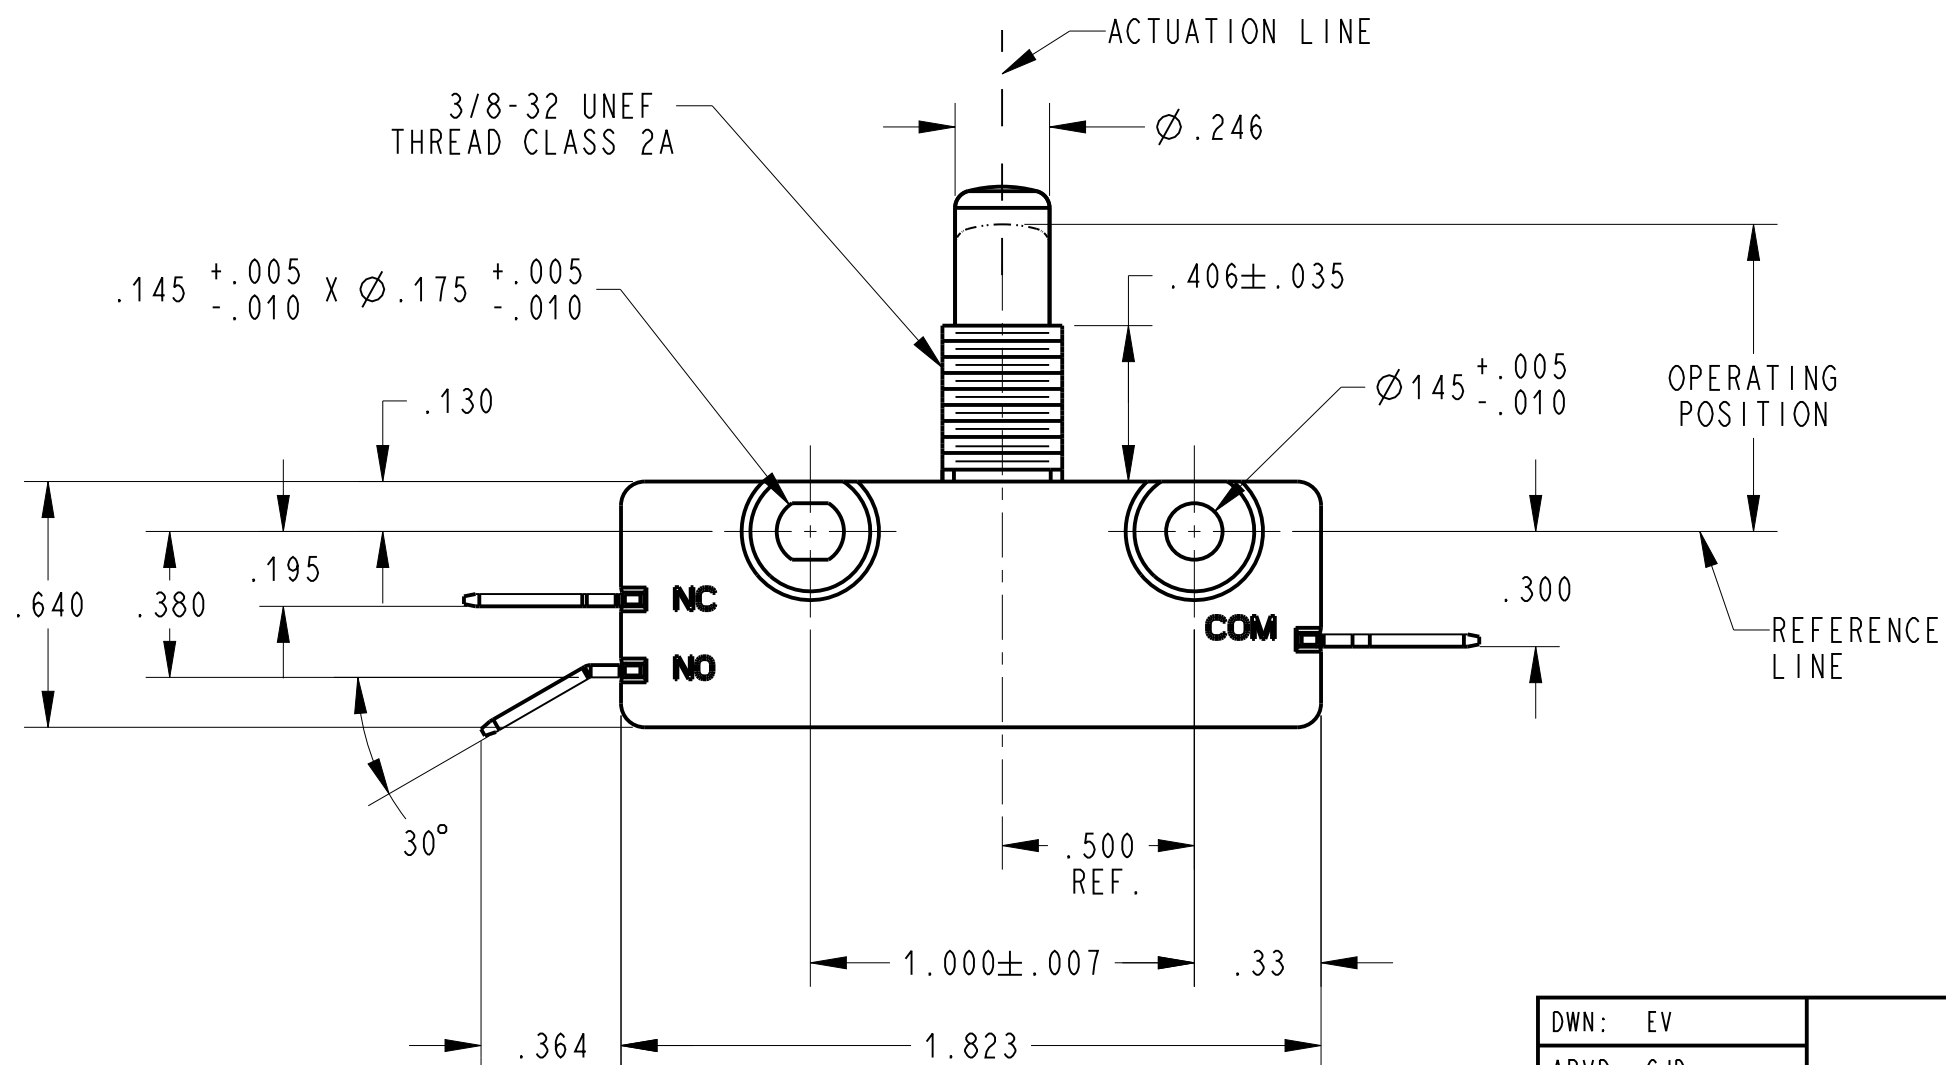


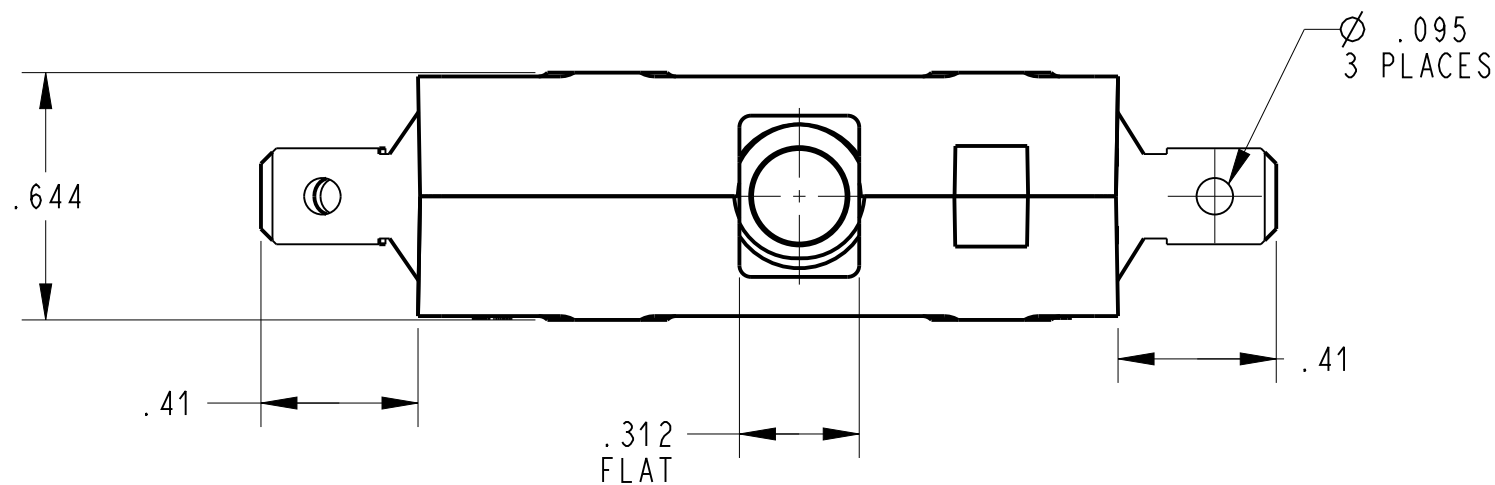

NOTES (UNLESS OTHERWISE SPECIFIED):

- *SWITCH CHARACTERISTICS

REST POSITION	.875 MAX.
PRE-TRAVEL	.050 MAX.
OPERATING POSITION	.782 TO .842
OVER TRAVEL	.218 MIN.
MOVEMENT DIFF.	.015 MAX.
OPERATING FORCE grams	425 MAX.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.


- UL** ELECTRICAL RATING

15 AMPS 125/250 VAC
3/4 H.P 125 VAC
1 1/2 H.P. 250 VAC
2A, 48VDC

- TERMINALS COMMON, N.O. & N.C. ARE .250 WIDTH x .032 THICKNESS.

- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES. INC.


- TEMPERATURE RATING -40°C TO +105°C

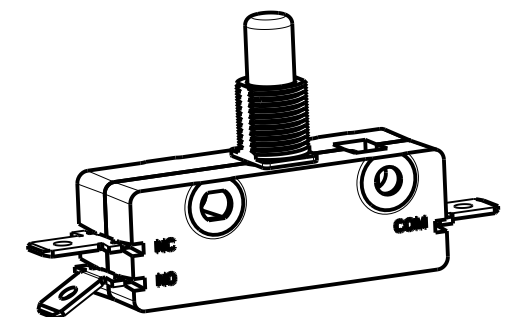

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: EV
APVD: CJD
DATE: 19-Nov-97

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

E	Z000370093	30-Jun-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCH	± 0.02	± 0.015	± 5.0°



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. 0E13-00M0

SCALE: 2:1 SH 1 OF 1

ORIGINAL ON PRO/E