




Ø .095
3 PLACES

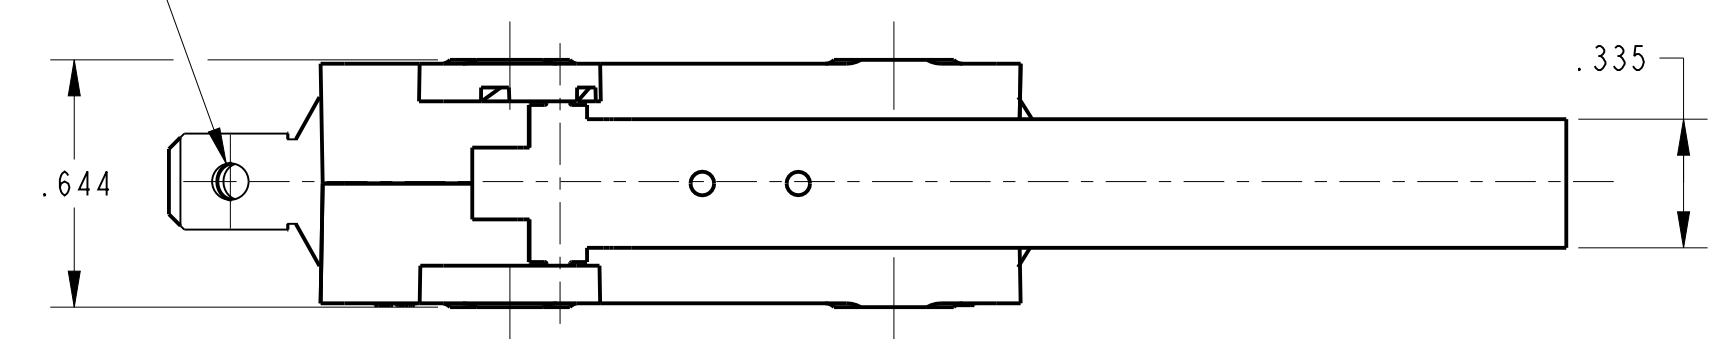


- NOTES (UNLESS OTHERWISE SPECIFIED):
- SWITCH CHARACTERISTICS
 - PRE-TRAVEL .343 MAX.
OPERATING POSITION .218 TO .343
OVER TRAVEL .187 MIN.
MOVEMENT DIFF. .140 MAX.
OPERATING FORCE grams 65 MAX.
RELEASE FORCE grams 7 MIN.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.

-  ELECTRICAL RATING
15A, 125/250VAC
3/4HP, 125VAC
1-1/2HP, 250VAC
2 A, 48 VDC
- TERMINALS COMMON, N.C. & N.O. ARE .250 WIDTH x .032 THICKNESS.
- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
- TEMPERATURE RATINGS: -40°C TO +105°C

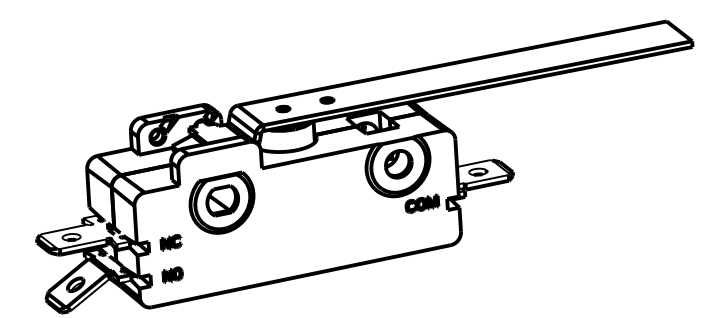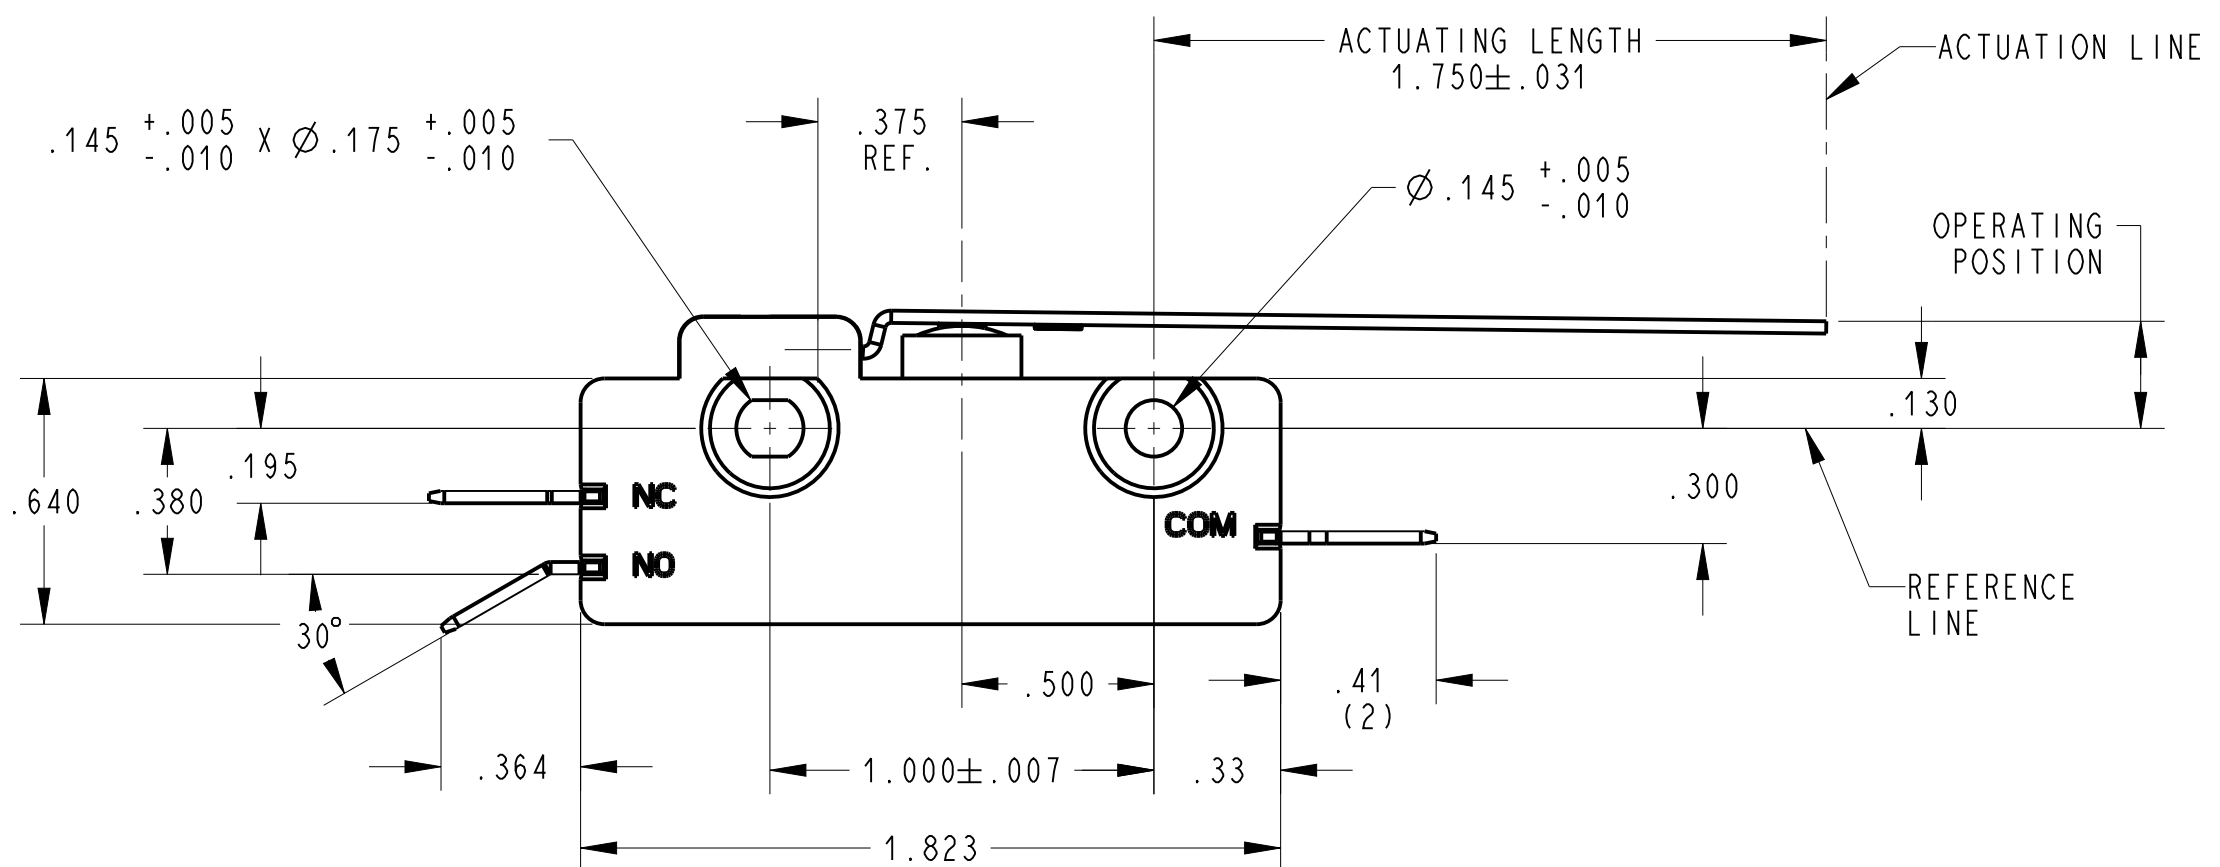

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: C RAMOS				 ZF Electronic Systems 11200 88th AVE. PLEASANT PRAIRIE, WI 53158			
APVD: E OROS							
DATE: 26-Aug-08							
THIRD ANGLE PROJECTION				NAME / DESCRIPTION			
				SPEC DRAWING			
PROJECT/ CSR				ITEM NO. 0E13-50H0			
4000000138				SCALE: 2:1 SH 1 OF 1			
TOLERANCE UNLESS SPECIFIED							
DWG UNITS				X.XX X.XXX ANGLES			
INCHES				± 0.02 ± 0.015 ± 5.0 °			

F	Z000370096	30-Jun-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD