
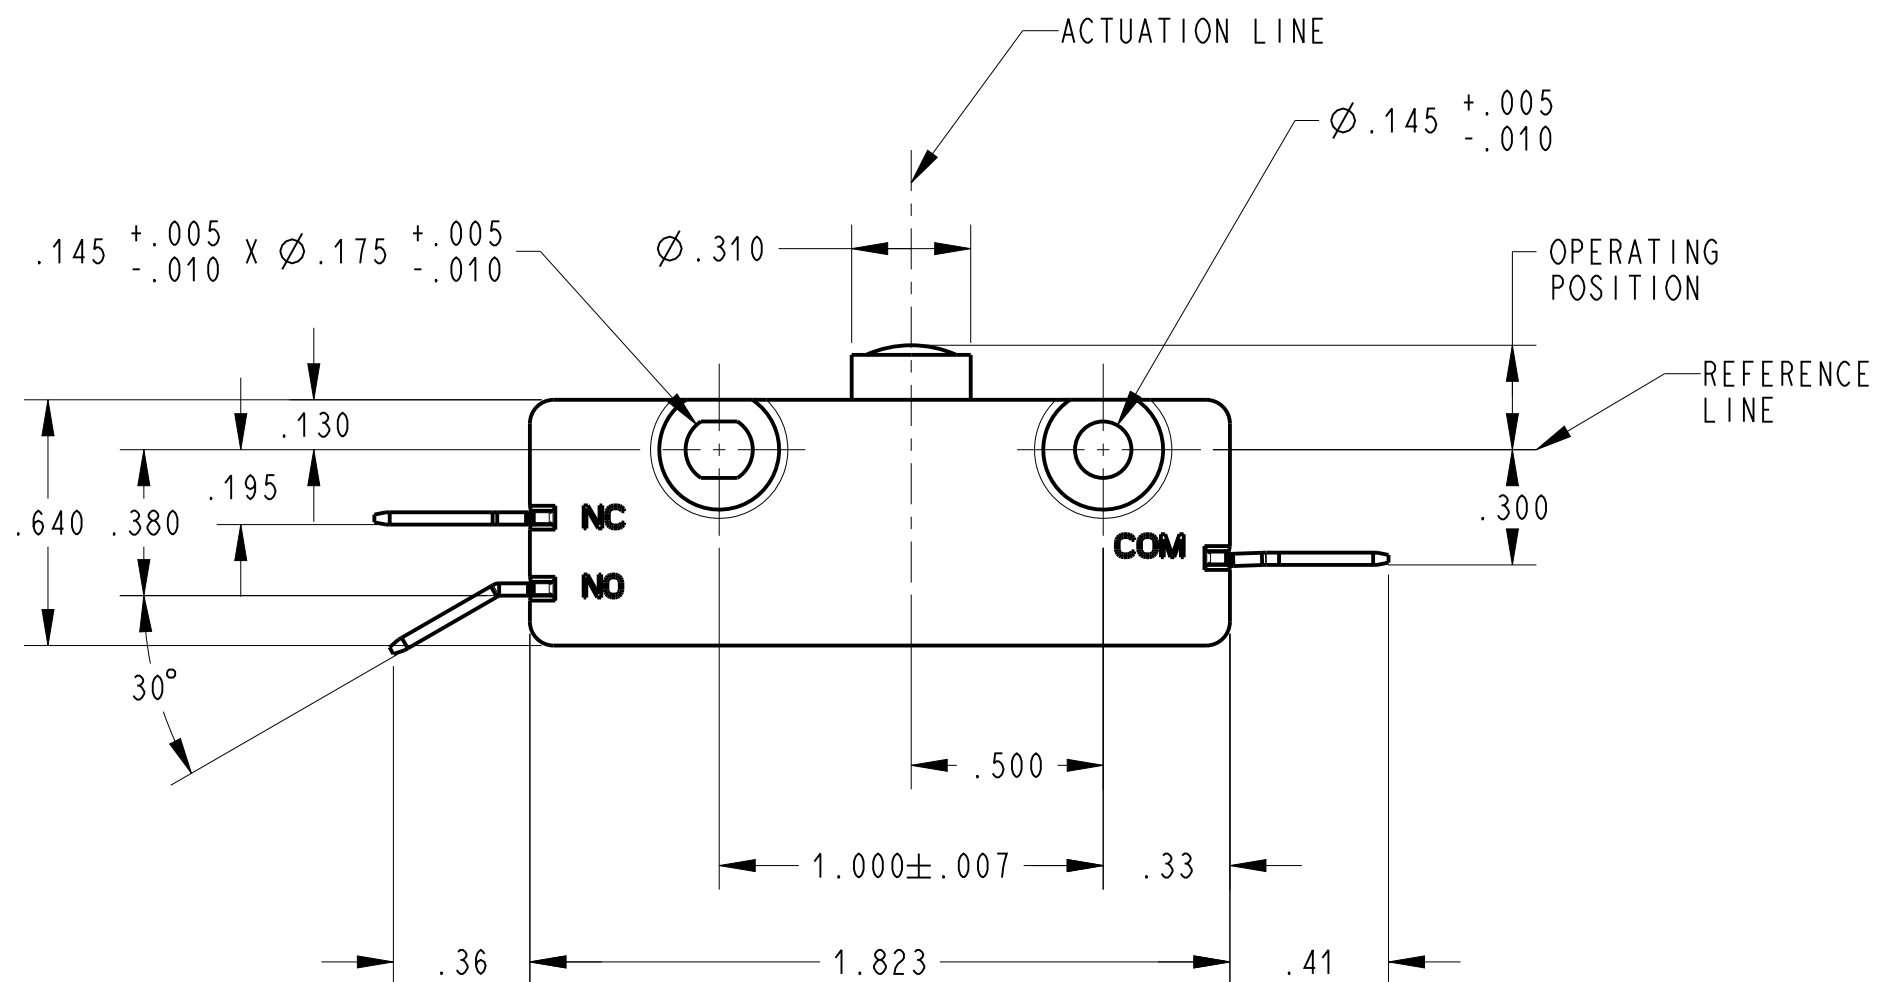


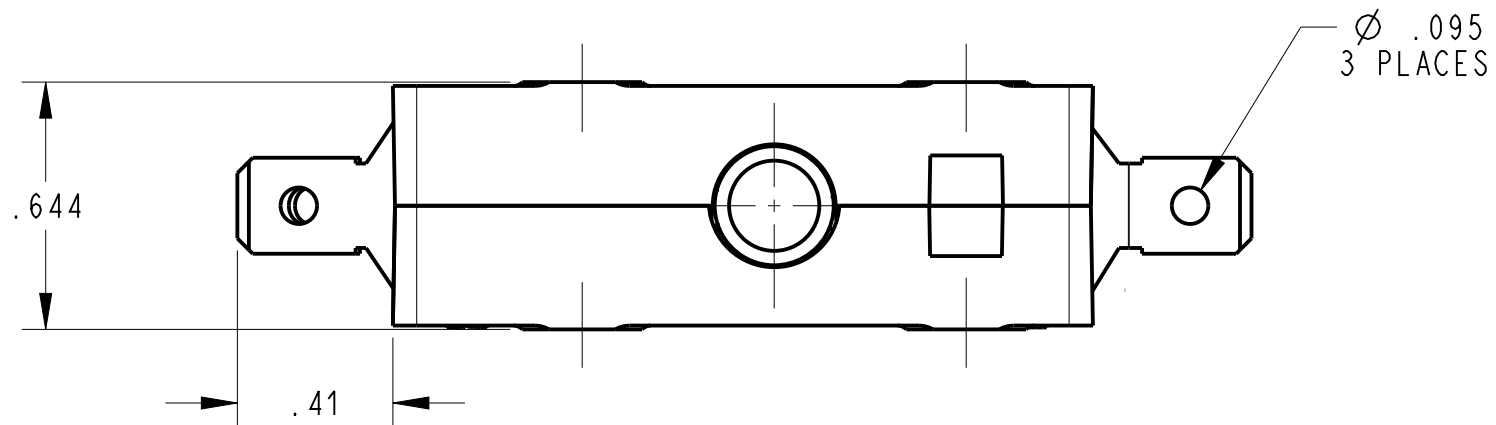

NOTES (UNLESS OTHERWISE SPECIFIED):

- *SWITCH CHARACTERISTICS
 REST POSITION .350 MAX.
 PRE-TRAVEL .100 MAX.
 OPERATING POSITION .222 TO .274
 OVER TRAVEL .050 MIN.
 MOVEMENT DIFF. .015 MAX.
 OPERATING FORCE grams 850 MAX.
 RELEASE FORCE grams 85 MIN.


ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.

- ELECTRICAL RATING
 25A, 125/250 VAC
 1 H.P. 125 VAC
 2 H.P. 250 VAC
 2A, 48 VDC

- TERMINALS COMMON, N.C. & N.O. ARE .250 WIDE X .032 THICK.

- RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.


- TEMPERATURE RATING: -40°C TO +105°C

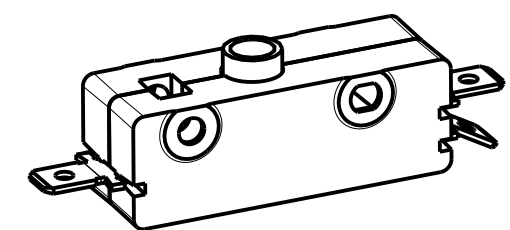

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: KAA
APVD: CJD
DATE: 11-Dec-96

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

C	Z000369882	30-Jun-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	± 5.0 °



ZF Electronic Systems

11200 88th AVE. PLEASANT PRAIRIE, WI 53158

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. 0E14-00A0

SCALE: 2:1 SH 1 OF 1

ORIGINAL ON PRO/E