


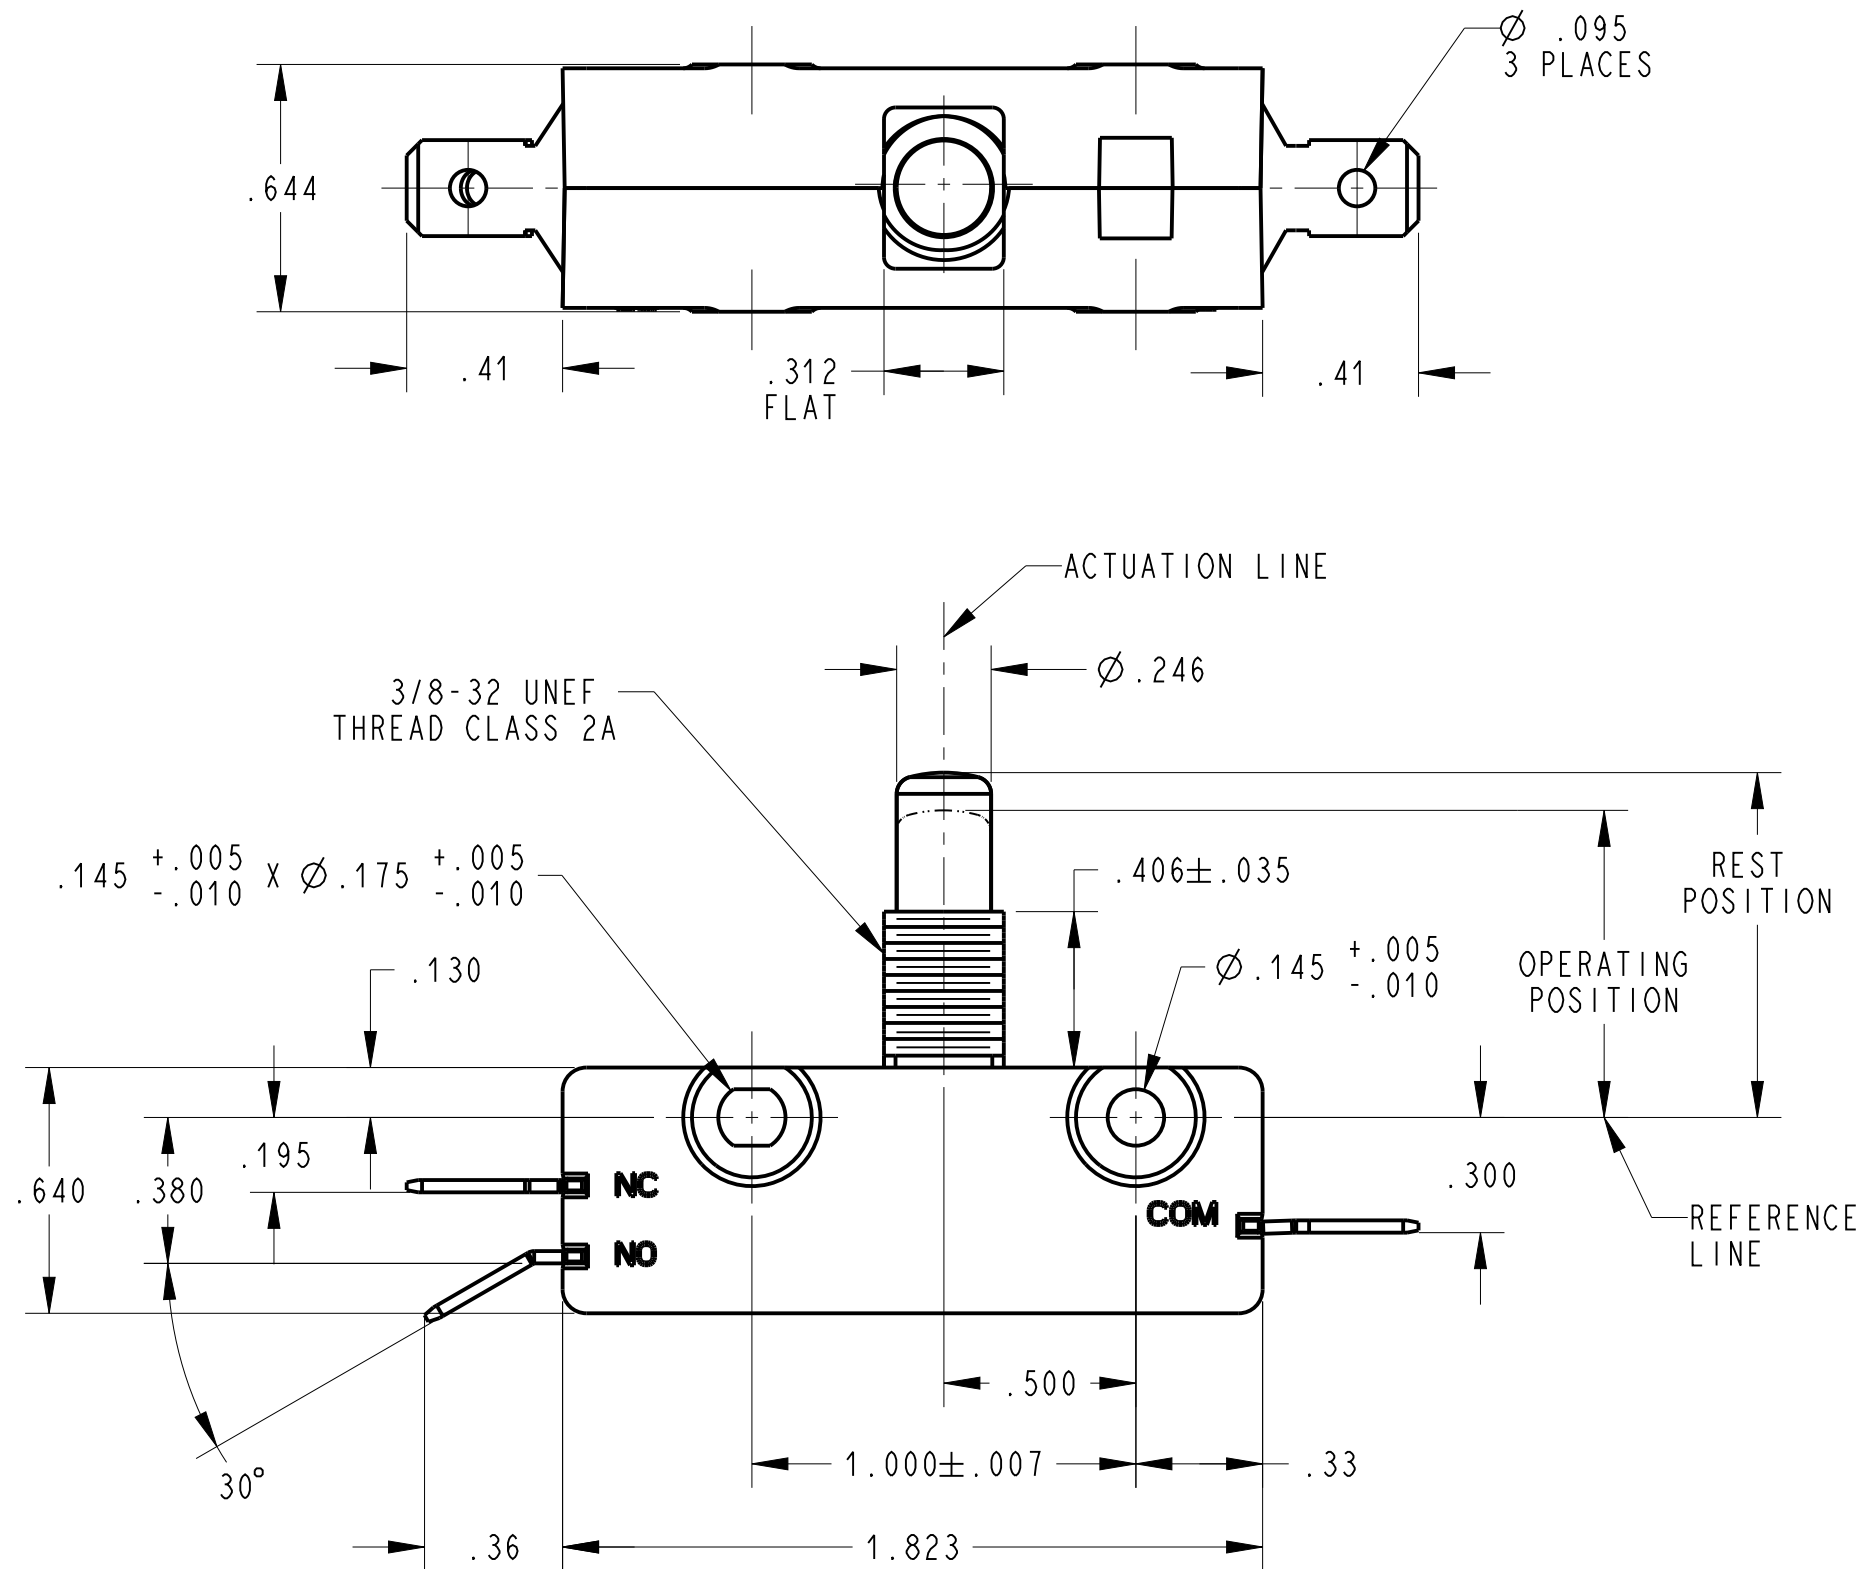


NOTES (UNLESS OTHERWISE SPECIFIED):


- *SWITCH CHARACTERISTICS

REST POSITION	.875 MAX.
PRE-TRAVEL	.100 MAX.
OPERATING POSITION	.745 TO .805
OVER TRAVEL	.168 MIN.
MOVEMENT DIFF.	.015 MAX.
OPERATING FORCE grams	850 MAX.
RELEASE FORCE grams	85 MIN.
- ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
2. **us** ELECTRICAL RATING

25 AMPS 125/250 VAC
1 H.P. 125 VAC
2 H.P. 250 VAC
2A, 48VDC
3. TERMINALS: COMMON, N.C. & N.O. ARE .250 WIDTH X .032 THICK.
4. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
5. TEMPERATURE RATING -40°C TO +105°C

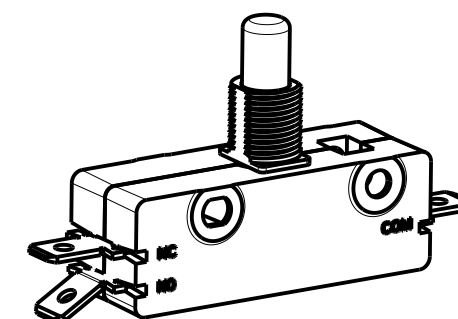

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: KAA		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A.	
APVD: KAA			
DATE: 11-Apr-03			
THIRD ANGLE PROJECTION		NAME / DESCRIPTION	
		SPECIFICATION DRAWING	
PROJECT/ CSR		B ITEM NO. 0E14-00M0	
N/A		SCALE: 2:1 SH 1 OF 1	
TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.015	$\pm 5.0^\circ$

E	Z000456630	11-May-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD