

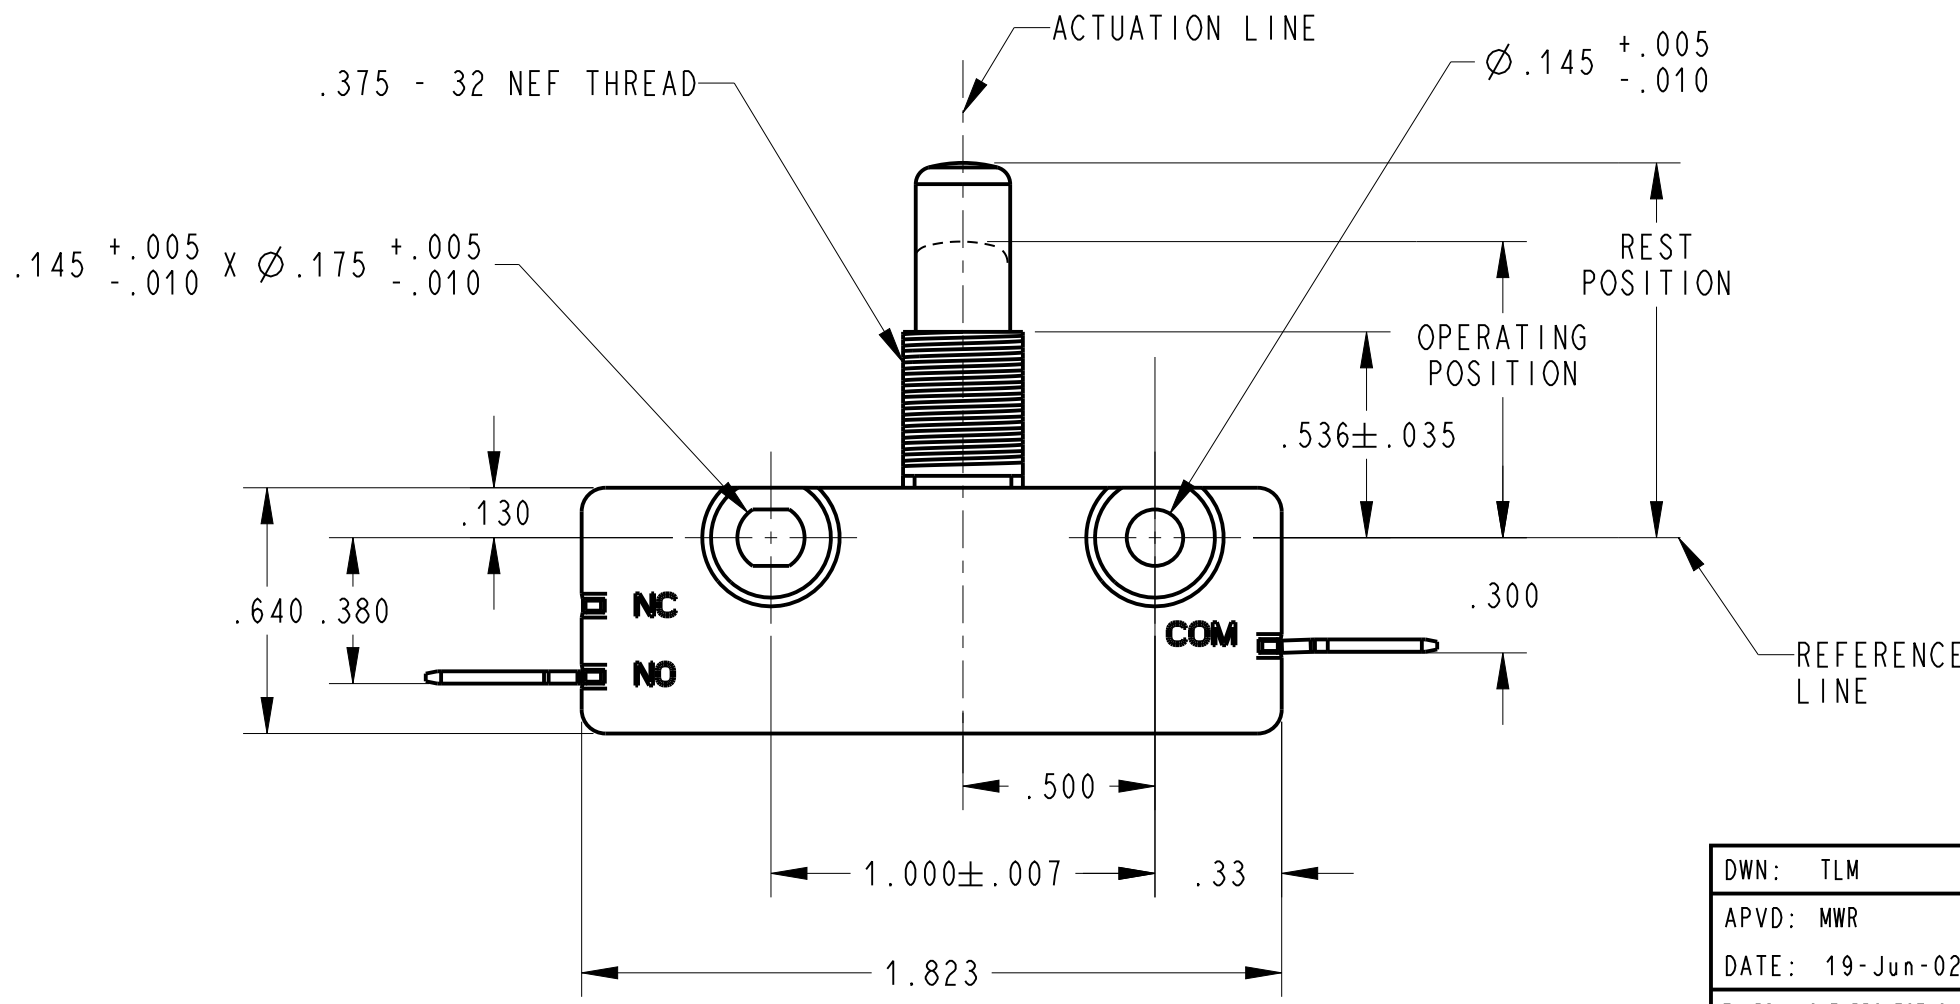


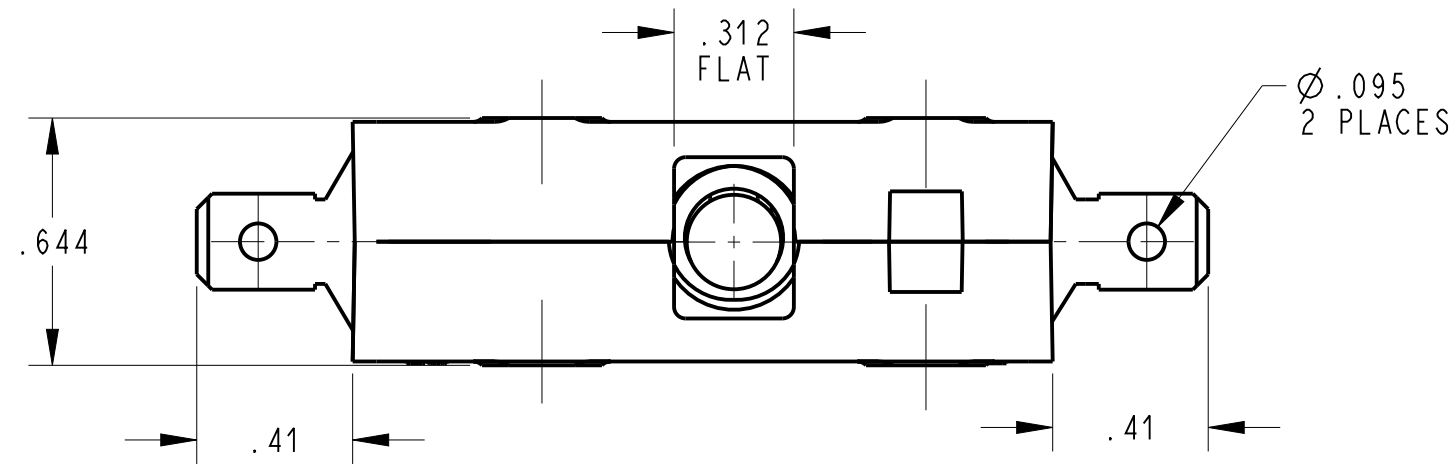


- NOTES (UNLESS OTHERWISE SPECIFIED):
- SWITCH CHARACTERISTICS:

REST POSITION	.875 MAX.
PRE-TRAVEL	.100 MAX.
OPERATING POSITION	.745 TO .805
OVER-TRAVEL	.168 MIN.
MOVEMENT DIFF.	.015 MAX.
OPERATING FORCE grams	850 MAX.
RELEASE FORCE grams	85 MIN.
 - ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
 -  **ELECTRICAL RATING**
 25A, 125/250VAC; 1 HP, 125VAC
 2 HP, 250VAC
 2A, 48 VDC
 - TERMINALS:
COMMON AND N.O. ARE .250 WIDTH X .032 THICKNESS.
 - RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
 - TEMPERATURE RATINGS: -40°C TO +105°C

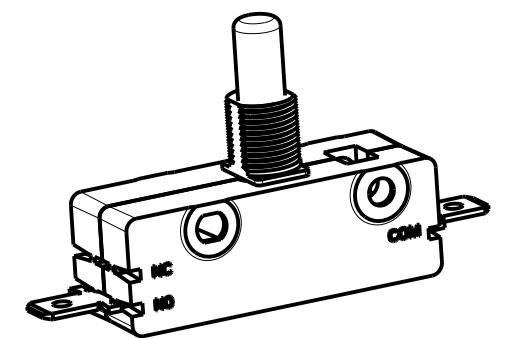

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: TLM		 ZF Electronic Systems 11200 88th AVE. PLEASANT PRAIRIE, WI 53158 NAME / DESCRIPTION													
APVD: MWR															
DATE: 19-Jun-02															
THIRD ANGLE PROJECTION 		SPECIFICATION DRAWING													
PROJECT/ CSR 4000000138		B ITEM NO. 0E14-01M0													
<table border="1"> <tr> <th colspan="4">TOLERANCE UNLESS SPECIFIED</th> </tr> <tr> <td>DWG UNITS</td> <td>X.XX</td> <td>X.XXX</td> <td>ANGLES</td> </tr> <tr> <td>INCHES</td> <td>± 0.02</td> <td>± 0.015</td> <td>± 5.0 °</td> </tr> </table>		TOLERANCE UNLESS SPECIFIED				DWG UNITS	X.XX	X.XXX	ANGLES	INCHES	± 0.02	± 0.015	± 5.0 °	SCALE: 2:1 SH 1 OF 1	
TOLERANCE UNLESS SPECIFIED															
DWG UNITS	X.XX	X.XXX	ANGLES												
INCHES	± 0.02	± 0.015	± 5.0 °												

D	Z000372324	14-Sep-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

ORIGINAL ON PRO/E