


NOTES (UNLESS OTHERWISE SPECIFIED):



- *SWITCH CHARACTERISTICS

REST POSITION	.875 MAX.
PRE-TRAVEL	.050 MAX.
OPERATING POSITION	.782 TO .842
OVER TRAVEL	.218 MIN.
MOVEMENT DIFF.	
EACH POLE	.015 MAX.
OPERATING FORCE grams	850 MAX.
RELEASE FORCE grams	170 MIN.
- ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
2. **cus** ELECTRICAL RATING

15A, 125/250 VAC
3/4 HP, 125 VAC;
1-1/2 HP, 250 VAC;
3. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
4. TEMPERATURE RATING: -40°C TO 105°C
5. TERMINALS ARE .250 WIDE X .032 THICK.

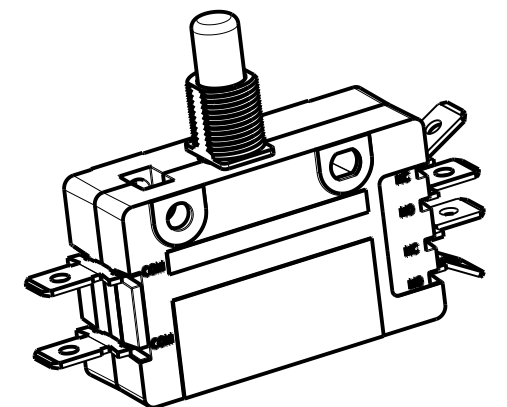

SHOWN IN A NON CLINCHED STATE
SCALE 1.000

DWN: EV		 ZF Electronic Systems PLEASANT PRAIRIE, WISCONSIN U.S.A. NAME / DESCRIPTION									
APVD: SL											
DATE: 15-Oct-90											
THIRD ANGLE PROJECTION											
PROJECT/ CSR		TOLERANCE UNLESS SPECIFIED <table border="1"> <tr> <th>DWG UNITS</th> <th>X.XX</th> <th>X.XXX</th> <th>ANGLES</th> </tr> <tr> <td>INCHES</td> <td>± 0.02</td> <td>± 0.015</td> <td>± 5.0 °</td> </tr> </table>		DWG UNITS	X.XX	X.XXX	ANGLES	INCHES	± 0.02	± 0.015	± 5.0 °
DWG UNITS	X.XX	X.XXX	ANGLES								
INCHES	± 0.02	± 0.015	± 5.0 °								
REV		B ITEM NO. 0E19-00M0 SCALE: 2.000 SH 1 OF 1									

D	Z000458181	24-May-18	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

ORIGINAL ON PRO/E