


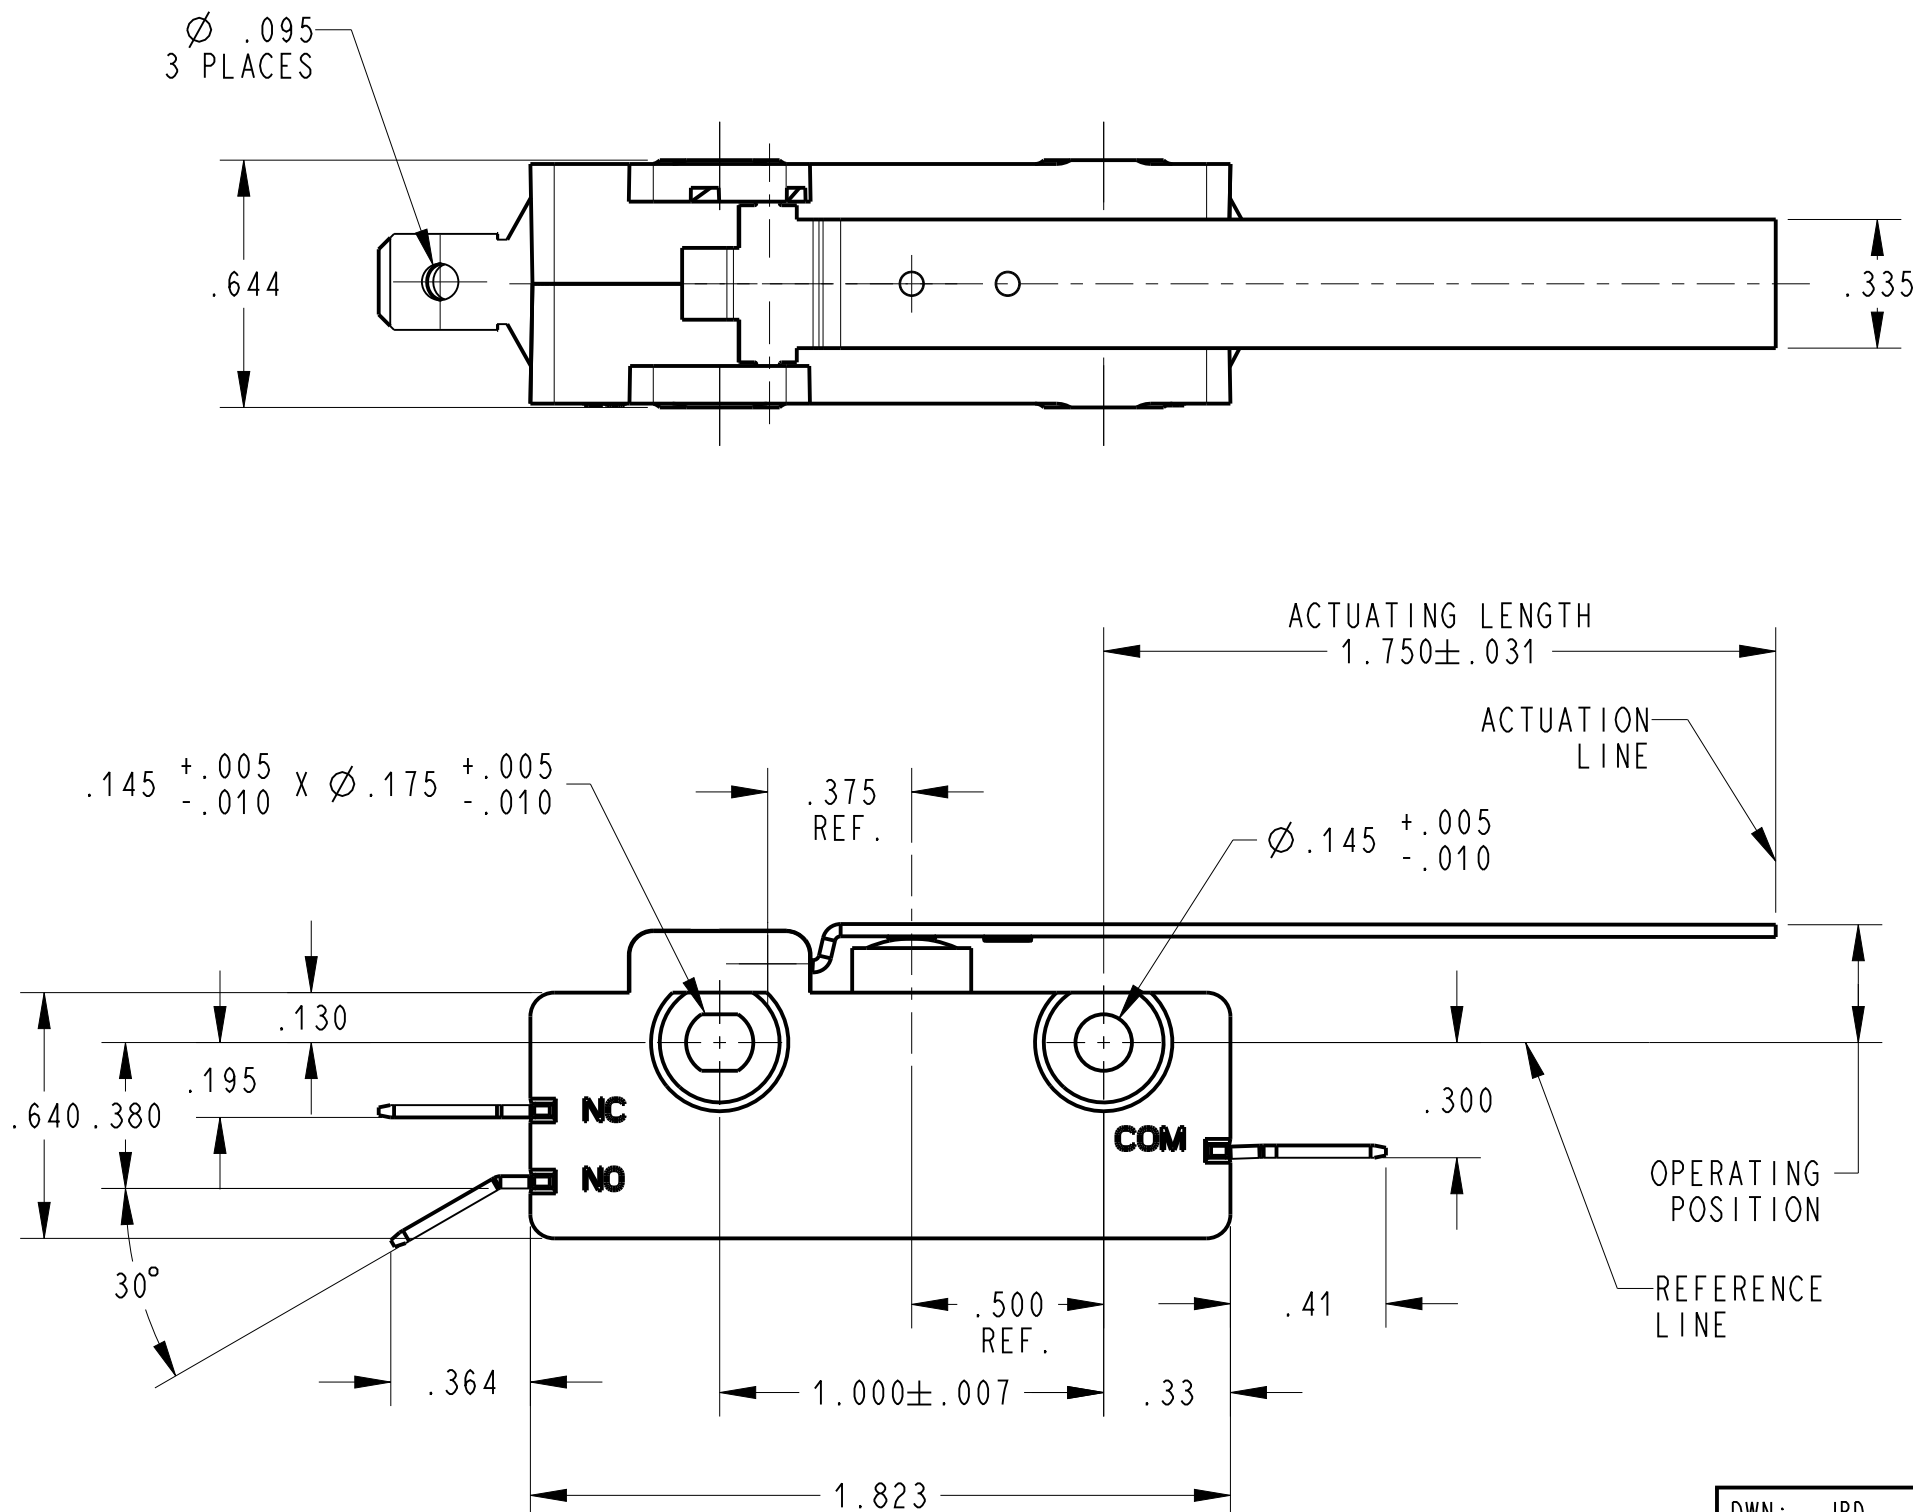

NOTES (UNLESS OTHERWISE SPECIFIED):

1. SWITCH CHARACTERISTICS

PRETRAVEL	.343 MAX.
OPERATING POSITION	.218 TO .343
OVER TRAVEL	.187 MIN
MOVEMENT DIFF.	.140 MAX.
OPERATING FORCE grams	65 MAX.
RELEASE FORCE grams	7 MIN.

ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.


2. ELECTRICAL RATING
0.1 A, 125 VAC;
0.1A 30VDC

3. TERMINALS COMMON, N.C. AND N.O. ARE
.250 WIDTH x .032 THICKNESS.

4. RECOGNIZED TO U.S. AND CANADIAN
REQUIREMENTS UNDER THE COMPONENT
RECOGNITION PROGRAM OF
UNDERWRITERS LABORATORIES, INC..

5. TEMPERATURE RATINGS: -40°C TO +105°C


6. ELECTRICAL LIFE AT RATED LOAD: 100,000 CYCLES.

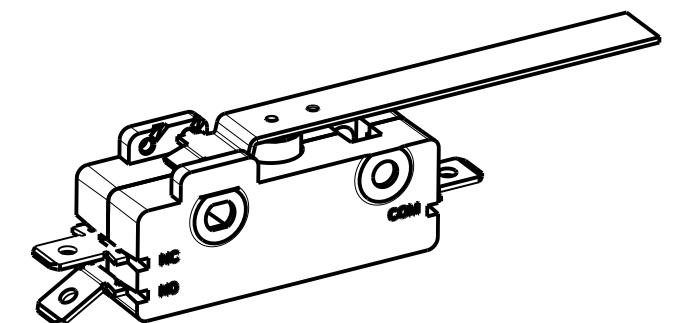

SHOWN IN A NON CLINCHED STATE
SCALE 1:1

DWN: JPD
APVD: ELL
DATE: 2015-02-25

THIRD ANGLE PROJECTION



PROJECT/ CSR
4000000138

B	Z000370092	30-Jun-16	JPD	ELL
REV	ECO NO.	DATE	PREP	APVD

TOLERANCE UNLESS SPECIFIED			
DWG UNITS	X.XX	X.XXX	ANGLES
INCH	$\pm$ 0.02	$\pm$ 0.015	$\pm$ 5.0°

 ZF Electronic Systems 11200 88th AVE. PLEASANT PRAIRIE, WI 53158 NAME / DESCRIPTION		SPECIFICATION DRAWING	
		B	ITEM NO. OG13-50H0
SCALE: 2:1		SH	1 OF 1