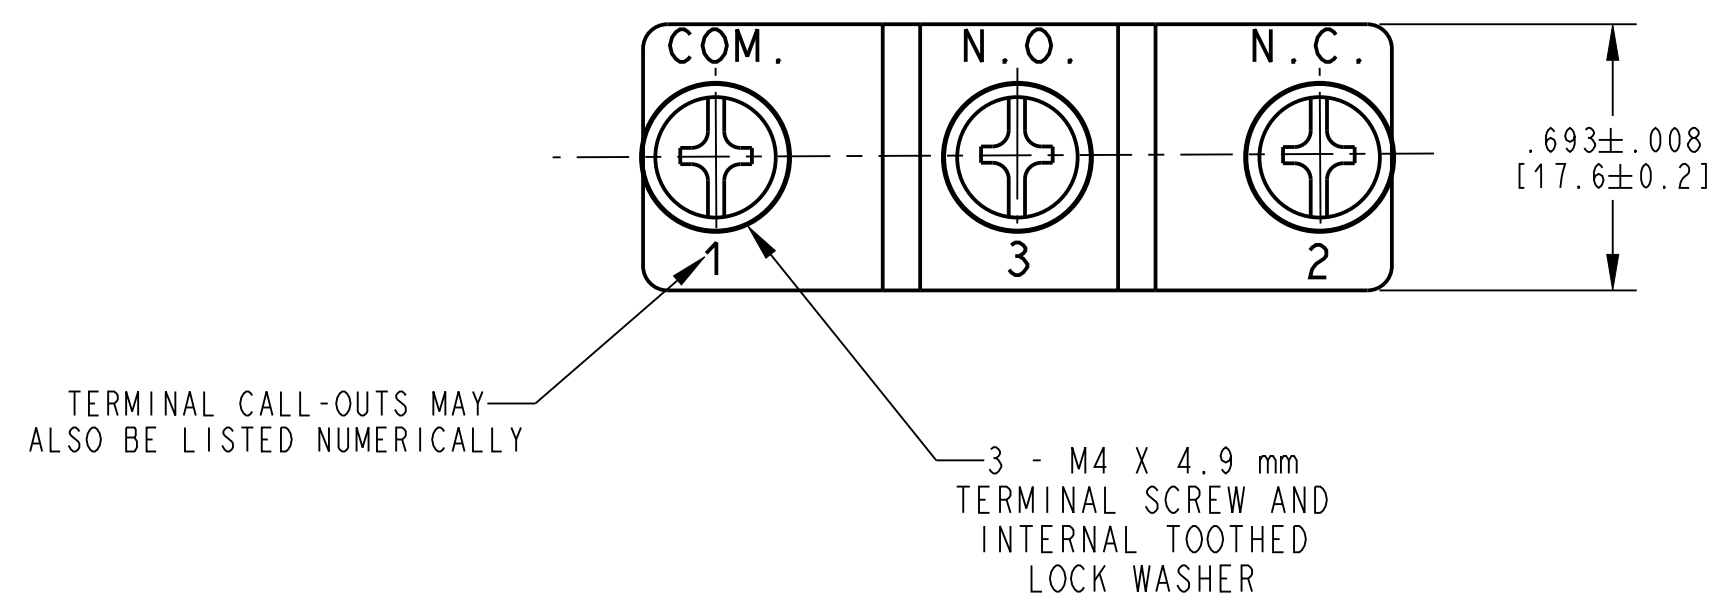




- NOTES (UNLESS OTHERWISE SPECIFIED):

1. RECOMMENDED MOUNTING: M4 FASTENER WITH 6.00 IN-LB [7.00 KGF-CM] OF TORQUE MAX.
2. RECOGNIZED TO U.S. AND CANADIAN REQUIREMENTS UNDER THE COMPONENT RECOGNITION PROGRAM OF UNDERWRITERS LABORATORIES, INC.
3. ALL CHARACTERISTICS ARE TAKEN AT THE ACTUATION LINE AND MEASURED FROM THE REFERENCE LINE.
4. FOR MARKING AND NAMING SPECIFICATION SEE ES021295.

CHARACTERISTICS	
ELECTRICAL RATING	15A 250VAC (cULus) T55°C 15A 250V~ (VDE)-5T40
TERMINAL	SCREW
OPER. FORCE MAX.	350 GMS
RELEASE FORCE MIN.	114 GMS
PRETRAVEL MAX.	.016 [0.4 mm]
OVERTRAVEL MIN.	.140 [3.58 mm]
MOVE. DIFF. MAX.	.002 [0.05 mm]
OPERATING POSITION	1.268 TO 1.362 [32.2 TO 34.6 mm]



DWN: JED		<div><div>ZF Electronic Systems</div><div>PLEASANT PRAIRIE, WISCONSIN U.S.A.</div><div>NAME / DESCRIPTION</div><div>SWITCH</div></div>				C		ITEM NO. GPTCRH01	
APVD: SG									
DATE: 25-May-04									
THIRD ANGLE PROJECTION									
		TOLERANCE UNLESS SPECIFIED				SCALE: DO NOT SCALE		SH 1 OF 1	
PROJECT/ CSR		DWG UNITS	X.XX	X.XXX	ANGLES				
4000000138		INCH	± 0.02	± 0.015	± 5 °				