
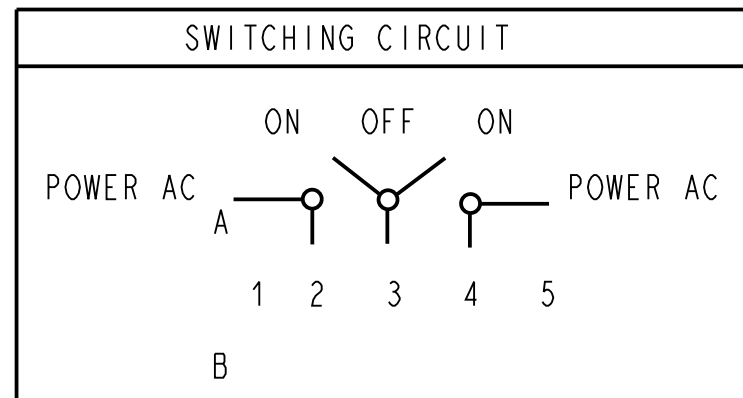


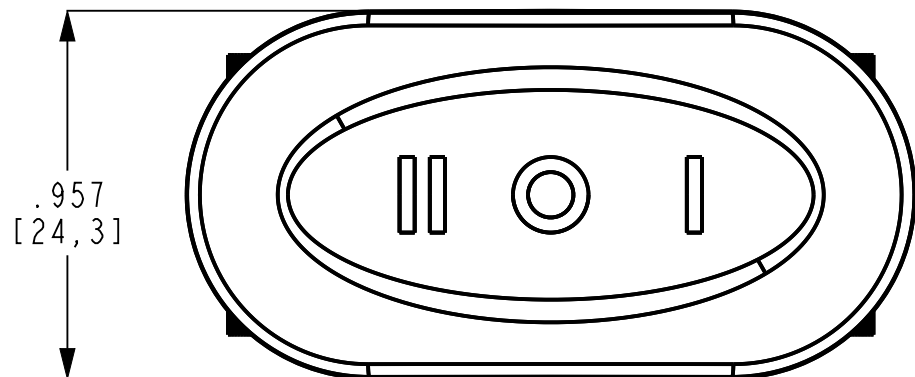

NOTES:

RATING TO BE MARKED ON HOUSING:

21A 14 VDC

NO AGENCY APPROVALS

20A 125VAC (NOT MARKED ON HOUSING)

3/4 HP 125VAC

INITIAL CONTACT RESISTANCE: 50 mΩ (MAX)


(H) INSULATION RESISTANCE: 500VDC 100 MΩ (MIN)

DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE.

WATERPROOF: IP56




DATE CODE FORMAT: YYWW

TEMPERATURE RATING: -20°C TO +85°C

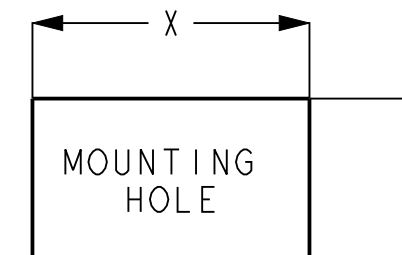

Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 (0.75 - 1.25)	1.441 ^{+.004} ₋₀ (36.6 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)
.049 TO .079 (1.25 - 2)	1.449 ^{+.004} ₋₀ (36.8 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)
.079 TO .118 (2 - 3)	1.457 ^{+.004} ₋₀ (37.0 ^{+0.1} ₋₀)	.835 ^{+.004} ₋₀ (21.2 ^{+0.1} ₋₀)

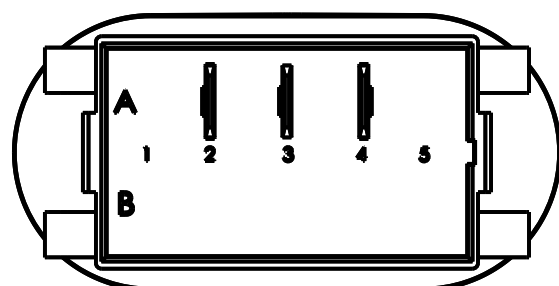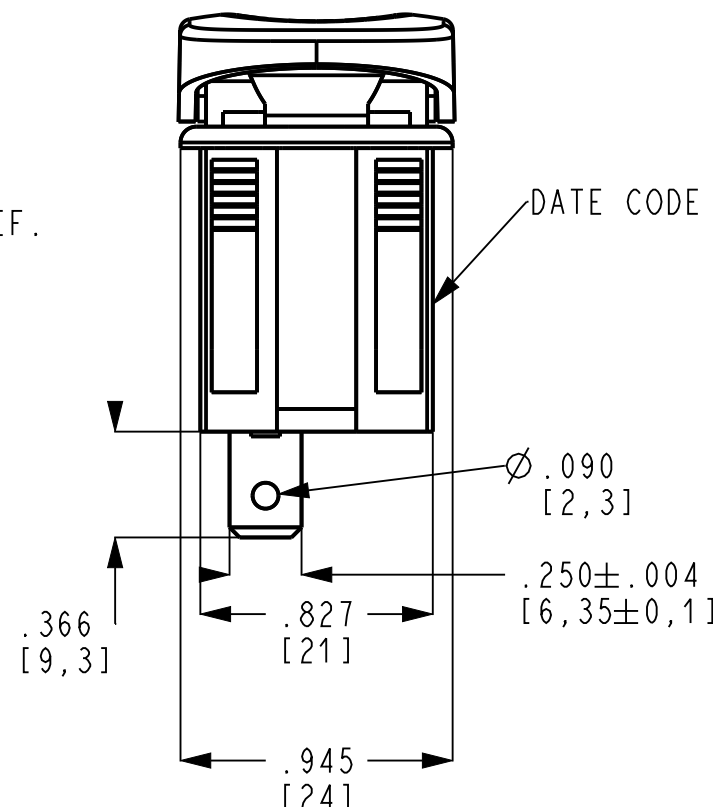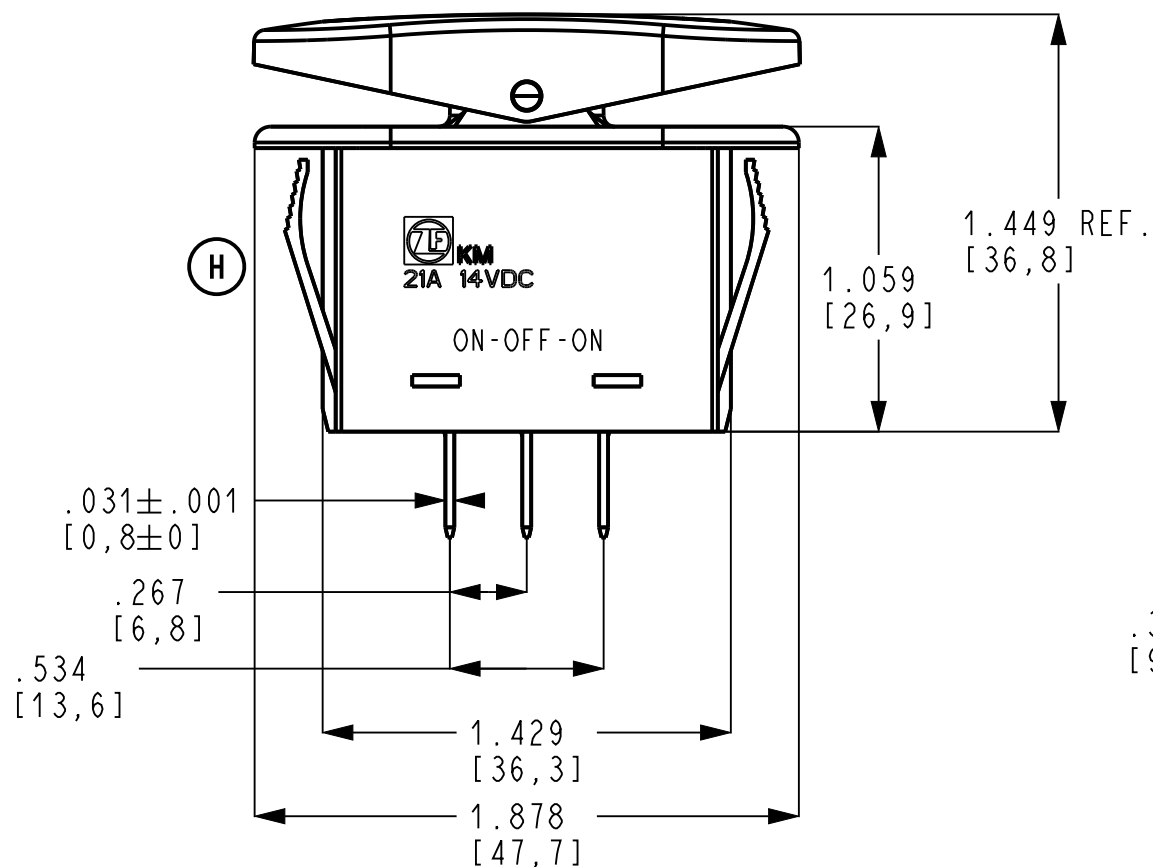

DWN: J.DOLNIK

APVD: JR

DATE: 20-MAY-08

THIRD ANGLE PROJECTION



PROJECT/ CSR

4000000138

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

KM SPDT ON-OFF NON-LIGHTED

B ITEM NO. KMD2CNB1BBNNNN

SCALE: 1:1 SH 1 OF 1

H	Z000374407	22-Aug-16	GP	EL
REV	ECO NO.	DATE	PREP	APVD