
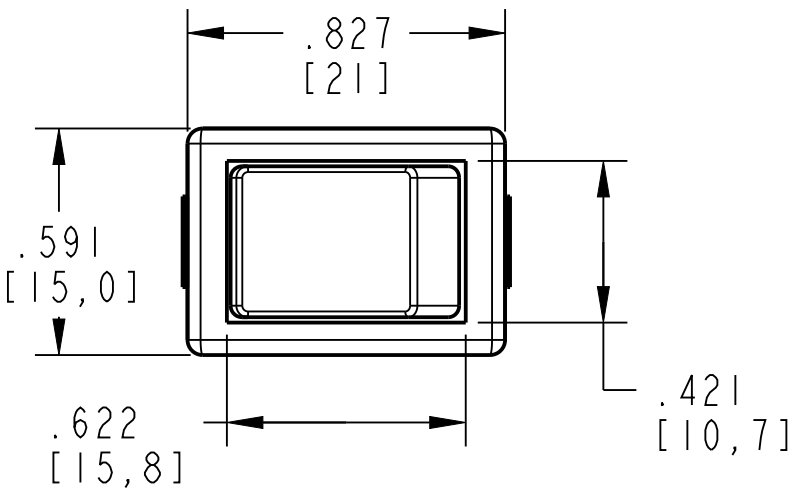


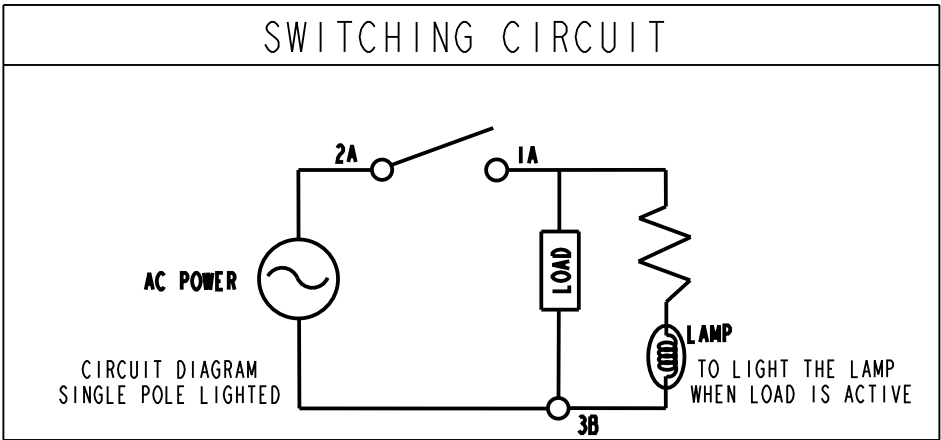

NOTES (UNLESS OTHERWISE SPECIFIED):

RATING TO BE MARKED ON HOUSING:

10A 125 VAC
8A 250 VAC
1/4 HP 125/250 VAC

10(4)A 250V-T125/55

12(4)A 125/250V~

DIELECTRIC WITHSTAND VOLTAGE: 1500 VAC FOR 1 MINUTE





INSULATION RESISTANCE: 100MΩ MIN. AT 500 VDC

INITIAL CONTACT RESISTANCE: 20mΩ MAX.

ELECTRICAL LIFE: 10,000 CYCLES

ACTUATOR COLOR: GREEN

ILLUMINATION: 100-125VAC

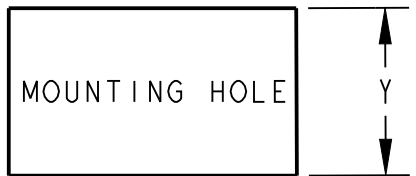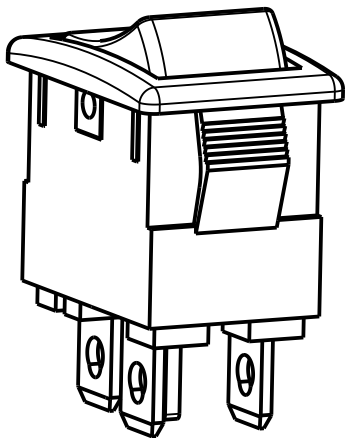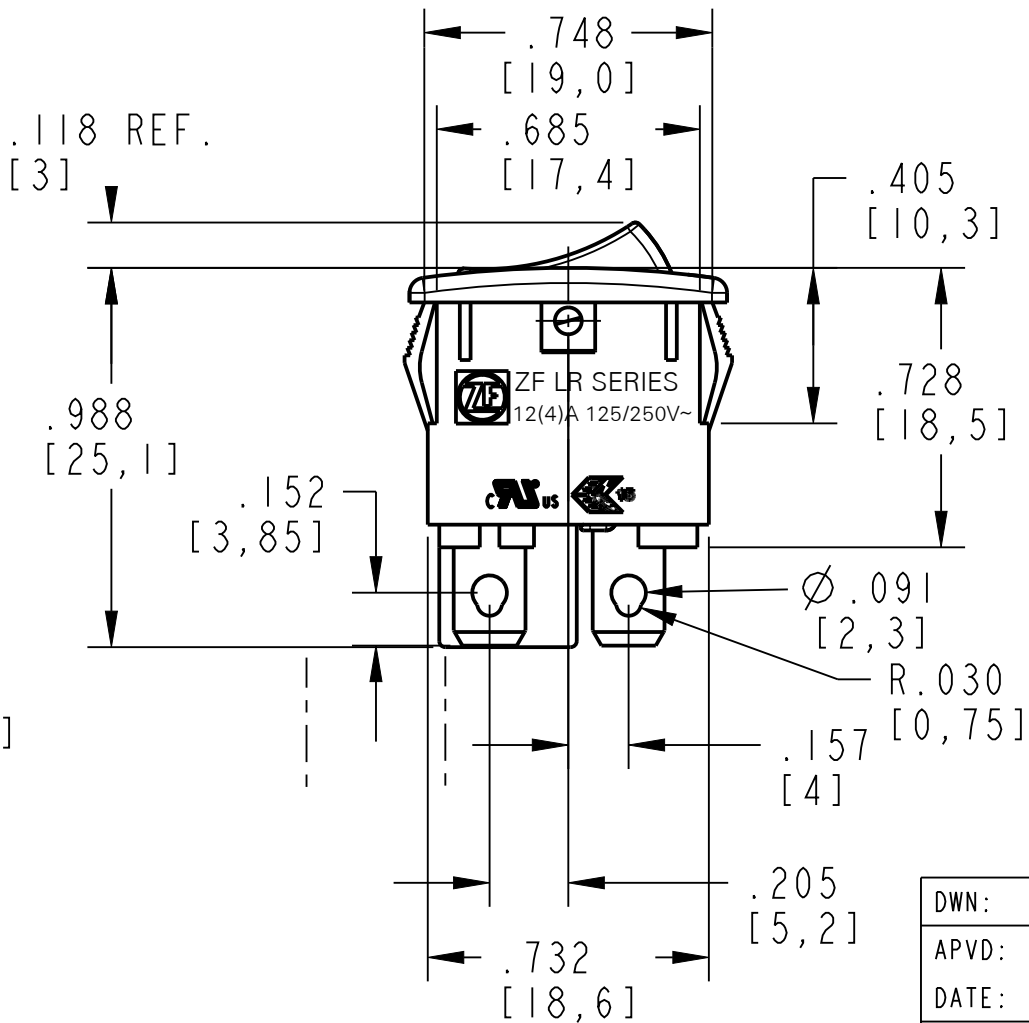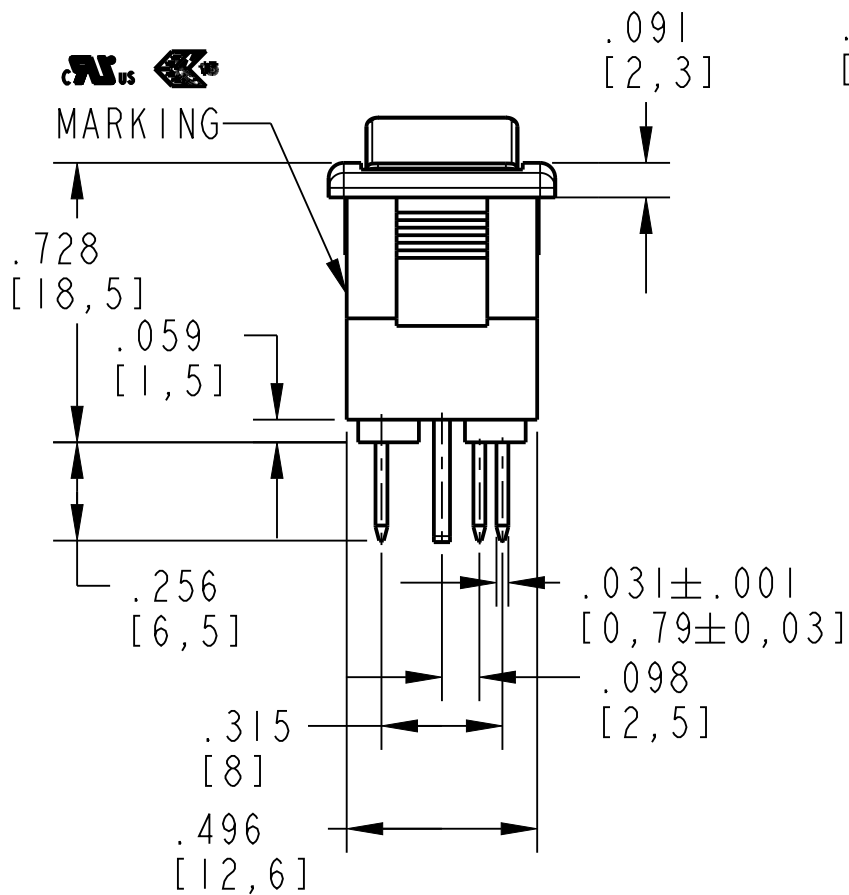


Z = PANEL THICKNESS

DIM. Z	DIM. X	DIM. Y
.030 TO .049 [0,75 TO 1,25]	.756+.004/- .000 [19,2 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.049 TO .079 [1,25 TO 2,0]	.764+.004/- .000 [19,4 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]
.079 TO .118 [2,0 TO 3,0]	.780+.004/- .000 [19,8 +0,1/-0,0]	.508+.006/- .000 [12,9+0,15/-0,0]

DWN: ELL
APVD: ELL
DATE: 13-AUG-25

THIRD ANGLE PROJECTION



PROJECT/ CSR
N/A

CONFIDENTIAL AND PROPRIETARY:
ALL INFORMATION OR INVENTIONS CONTAINED IN THIS
DOCUMENT OR DERIVED FROM THE INFORMATION THERE
IN IS OWNED BY ZF ELECTRONIC SYSTEMS, AND IS
CONFIDENTIAL AND PROPRIETARY. REVIEW OR
POSSESSION OF THIS DOCUMENT INDICATES AGREEMENT
THAT SUCH INFORMATION AND INVENTIONS WILL NOT BE
DISCLOSED, REPRODUCED OR OTHERWISE USED IN ANY
WAY WITHOUT EXPRESS WRITTEN PERMISSION FROM AN
AUTHORIZED REPRESENTATIVE OF ZF ELECTRONIC
SYSTEMS.

TOLERANCE UNLESS SPECIFIED

DWG UNITS	X.XX	X.XXX	ANGLES
INCHES	± 0.02	± 0.012	± 5.0 °



ZF Electronic Systems

PLEASANT PRAIRIE, WISCONSIN U.S.A.

NAME / DESCRIPTION

SPECIFICATION DRAWING

B ITEM NO. LRA22H2BBGLN

SCALE: 2.000 SH 1 OF 1

A	Z000000000	2025-08-13	ELL	ELL
REV	ECO NO.	DATE	PREP	APVD